

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
FT	0					
E2		REVISED PER ECO-11-005027	11MAR11	RK	HMR	

NOTES:

PHYSICAL PROPERTIES:
 HOUSING MATERIAL: THERMOPLASTIC, PC
 FLAMABILITY: UL94V-0
 COLOR: BLACK


TERMINAL:
 TERMINALS: BRASS, TIN PLATED
 SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
 PITCH: 11.0mm(.433)
 WIRE RANGE: 14-22 AWG
 RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
 MAX CURRENT: 25A
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
 OPERATING TEMP: -40°C TO 120°C

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

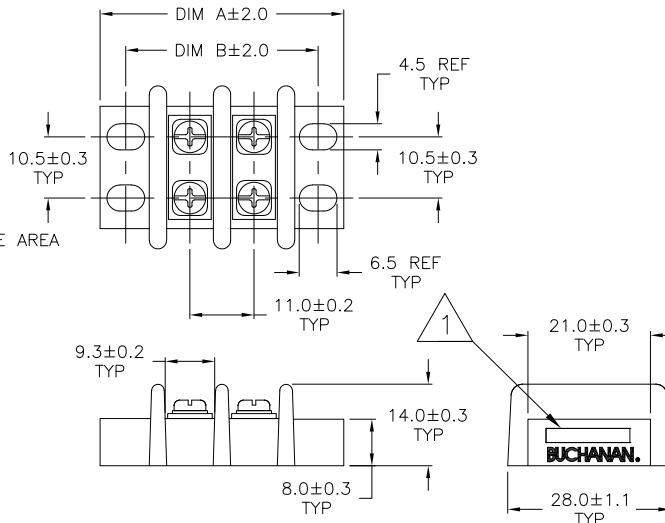

296.1	304.9	26	2-1546477-6
285.1	293.9	25	2-1546477-5
274.1	282.9	24	2-1546477-4
263.1	271.9	23	2-1546477-3
252.1	260.9	22	2-1546477-2
241.1	249.9	21	2-1546477-1
230.1	238.9	20	2-1546477-0
219.1	227.9	19	1-1546477-9
208.1	216.9	18	1-1546477-8
197.1	205.9	17	1-1546477-7
186.1	194.9	16	1-1546477-6
175.1	183.9	15	1-1546477-5
164.1	172.9	14	1-1546477-4
153.1	161.9	13	1-1546477-3
142.1	150.9	12	1-1546477-2
131.1	139.9	11	1-1546477-1
120.1	128.9	10	1-1546477-0
109.1	117.9	09	1546477-9
98.1	106.9	08	1546477-8
87.1	95.9	07	1546477-7
76.1	84.9	06	1546477-6
65.1	73.9	05	1546477-5
54.1	62.9	04	1546477-4
43.1	51.9	03	1546477-3
32.1	40.9	02	1546477-2
DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	S SCHEGEL	22JAN03
mm	0 PLC ± -	CHK	C RICHARD	1/22/03
	1 PLC ± 0.3	APVD	C RICHARD	1/22/03
	2 PLC ± 0.25	NAME	STE TE Connectivity	
	3 PLC ± -	PRODUCT SPEC	DOUBLE ROW BARRIER STRIP W/ WASHER 11.0mm(.433) SPACING	
	4 PLC ± -	APPLICATION SPEC	SIZE	CAGE CODE
	ANGLES ± 2°	WEIGHT	A3	00779
MATERIAL	FINISH	CUSTOMER DRAWING	DRAWING NO	1546477
		SCALE	1:1	SHEET 1 OF 1
		REV	E2	