


# TERMINAL BLOCKS

SRSL 4-T32

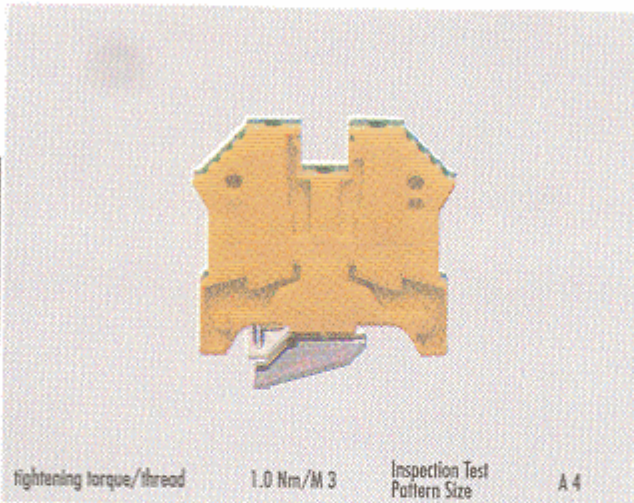

tightening torque/thread	1.0 Nm/M 3	Inspection Test Pattern Size	A 4
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 4-T32</b>	41065.2	green/yellow	100


**Ratings:**

<b>Dimensions</b>	TS 32
LxBxH (mm)	56x8x52
Stripped Length	12 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-6 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-4 mm <sup>2</sup>
Wire Size	AWG 22-10

SRSL 10-T32

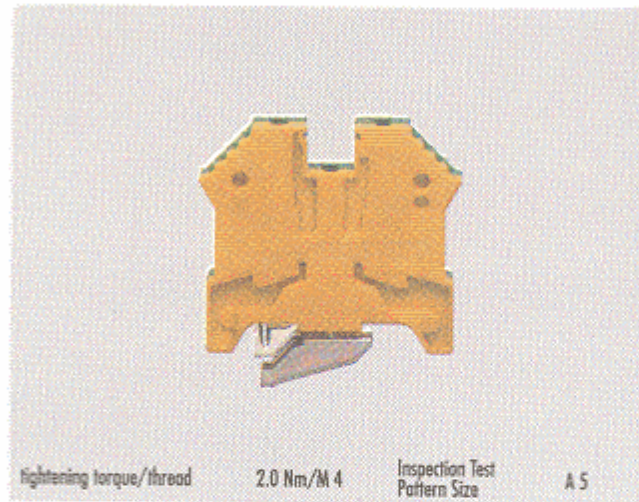

tightening torque/thread	2.0 Nm/M 4	Inspection Test Pattern Size	A 5
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 10-T32</b>	41066.2	green/yellow	80


**Ratings:**

<b>Dimensions</b>	TS 32
LxBxH (mm)	56x10x52
Stripped Length	12 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-10 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-10 mm <sup>2</sup>
Wire Size	AWG 20-8

SRSL 2.5-T35

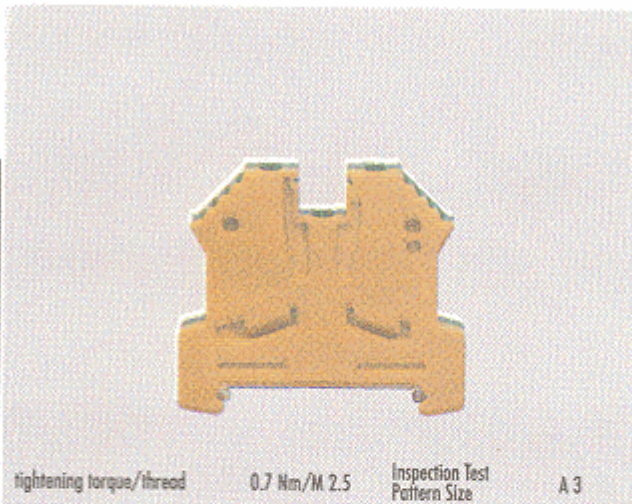

tightening torque/thread	0.7 Nm/M 2.5	Inspection Test Pattern Size	A 3
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 2.5-T35</b>	41056.2	green/yellow	100


**Ratings:**

<b>Dimensions</b>	TS 35
LxBxH (mm)	52x6x47
Stripped Length	10 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-4 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-2.5 mm <sup>2</sup>
Wire Size	AWG 22-14

SRSL 4-T35

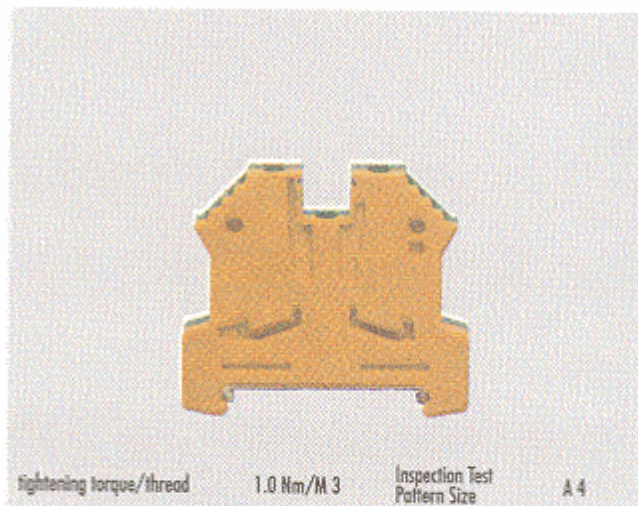

tightening torque/thread	1.0 Nm/M 3	Inspection Test Pattern Size	A 4
Type	Cat.-No.	Qty.p.pck.	
<b>SRSL 4-T35</b>	41212.2	green/yellow	100

**Ratings:**

<b>Dimensions</b>	TS 35
LxBxH (mm)	56x8x47
Stripped Length	12 mm

**Max Rated Cross Section**

Single Wire (solid)	0.2-6 mm <sup>2</sup>
Stranded Wire (flexible)	0.2-4 mm <sup>2</sup>
Wire Size	AWG 22-10