

tightening torque/thread 2.0 Nm/M 4 Inspection Test Pattern Size A 5


Type Cat.-No. Qty.p.pck.  
**SRSL 10-T35** 41213.2 green/yellow 80

**Ratings:**

**Dimensions** TS 35  
 LxBxH (mm) 56x10x47  
 Stripped Length 12 mm

**Max Rated Cross Section**

Single Wire (solid) 0.2-10 mm<sup>2</sup>  
 Stranded Wire (flexible) 0.2-10 mm<sup>2</sup>  
 Wire Size AWG 20-8



tightening torque/thread 4.0 Nm/M 5 Inspection Test Pattern Size B 7


Type Cat.-No. Qty.p.pck.  
**SRSL 16-T32** 41196.2 green/yellow 50

**Ratings:**

**Dimensions** TS 32  
 LxBxH (mm) 50x12x63  
 Stripped Length 12 mm

**Max Rated Cross Section**

Single Wire (solid) 2.5-25 mm<sup>2</sup>  
 Stranded Wire (flexible) 2.5-16 mm<sup>2</sup>  
 Wire Size AWG 12-6

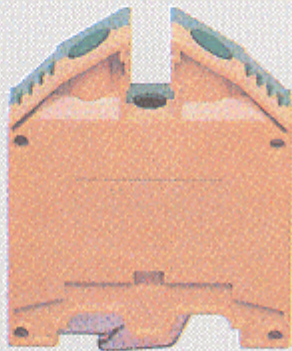

tightening torque/thread 5.0 Nm/M 6 Inspection Test Pattern Size B 8

Type Cat.-No. Qty.p.pck.  
**SRSL 35-T32** 41198.2 green/yellow 20

**Ratings:**

**Dimensions** TS 32  
 LxBxH (mm) 58x16x76  
 Stripped Length 20 mm

**Max Rated Cross Section**

Single Wire (solid) 2.5-50 mm<sup>2</sup>  
 Stranded Wire (flexible) 2.5-35 mm<sup>2</sup>  
 Wire Size AWG 12-2



tightening torque/thread 4.0 Nm/M 5 Inspection Test Pattern Size B 7

Type Cat.-No. Qty.p.pck.  
**SRSL 16-T35** 41197.2 green/yellow 50

**Ratings:**

**Dimensions** TS 35  
 LxBxH (mm) 56x12x58  
 Stripped Length 12 mm

**Max Rated Cross Section**

Single Wire (solid) 2.5-25 mm<sup>2</sup>  
 Stranded Wire (flexible) 2.5-16 mm<sup>2</sup>  
 Wire Size AWG 12-6