
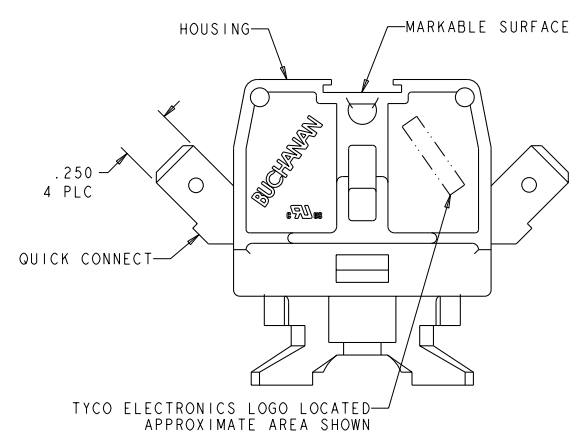
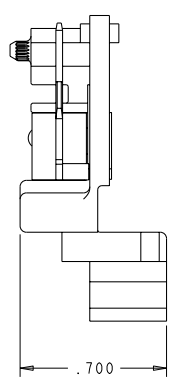


REV	DATE	BY	CHKD	APPROV
B	20MAR2010	HMR	CR	
REVISIONS				
LOC	DIST	DESCRIPTION		
FT	0			

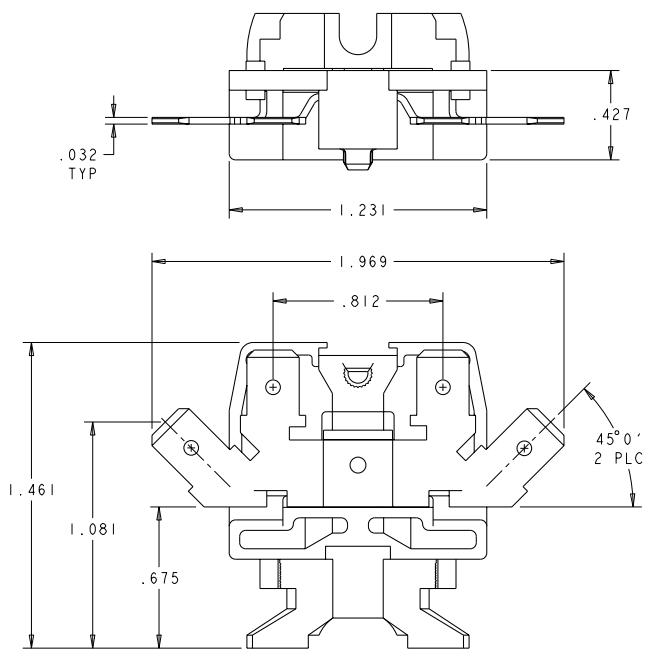

- △ PHYSICAL PROPERTIES  
HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.  
QUICK CONNECT: COPPER ALLOY, TIN PLATED.
- 2. MECHANICAL  
PITCH: .375  
MOUNTING: STANDARD CHANNEL AND CLAMP.  
OPERATING TEMPERATURE: 150°C MAX.
- 3. ELECTRICAL  
MAXIMUM CURRENT: 20A  
OPERATING VOLTAGE: 300 V

1546150-1  
PART NUMBER

DIMENSIONS:		DATE		DRAWN	
INCHES		17JUN2002		S. WELDON	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		17JUN2002		S. YODER	
0 PLC	±.005	17JUN2002		S. YODER	
1 PLC	±.005	17JUN2002		S. YODER	
2 PLC	±.005	17JUN2002		S. YODER	
3 PLC	±.005	17JUN2002		S. YODER	
4 PLC	±.005	17JUN2002		S. YODER	
ANGLES	±.005	17JUN2002		S. YODER	
MATERIAL		WEIGHT		RESTRICTED TO	
-		-		-	
FINISH		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 1 REV B	