


- Series 150 DIL Headers are equipped with .025" dia. pins MM #0290. See page 182 for details.
- Series 153 DIL Headers have 3-level wrapposts MM #5301. See page 194 for details.
- Both series have .018" dia. solder tails which are pluggable into standard contacts.
- Insulators are high temperature thermoplastic.

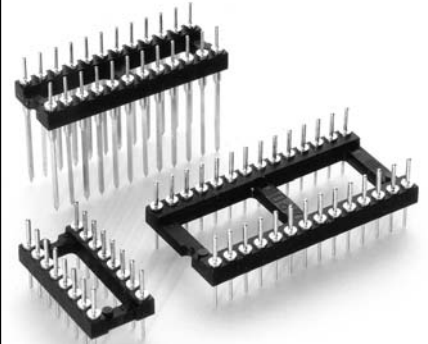

Total number of pins				Quantity per tube	Ordering Information				
	A	B	C		Solder Tail	3 Level Wrapost			
10	0.5	0.2	0.3	40	150-XX-210-00-001000	153-10-210-00-001000	<div style="text-align: center;"> <p>For RoHS compliance select ◇ plating code.</p> </div> <div style="text-align: center; margin-top: 20px;"> <p>For Electrical, Mechanical & Environmental Data, See pg. 4</p> </div> <div style="text-align: center; margin-top: 20px;"> <p>XX=Plating Code See Below</p> </div>		
4	0.2	0.3	0.4	102	150-XX-304-00-001000	153-10-304-00-001000			
6	0.3	0.3	0.4	67	150-XX-306-00-001000	153-10-306-00-001000			
8	0.4	0.3	0.4	50	150-XX-308-00-001000	153-10-308-00-001000			
10	0.5	0.3	0.4	40	150-XX-310-00-001000	153-10-310-00-001000			
14	0.7	0.3	0.4	29	150-XX-314-00-001000	153-10-314-00-001000			
16	0.8	0.3	0.4	25	150-XX-316-00-001000	153-10-316-00-001000			
18	0.9	0.3	0.4	22	150-XX-318-00-001000	153-10-318-00-001000			
20	1.0	0.3	0.4	20	150-XX-320-00-001000	153-10-320-00-001000			
22	1.1	0.3	0.4	18	150-XX-322-00-001000	153-10-322-00-001000			
24	1.2	0.3	0.4	16	150-XX-324-00-001000	153-10-324-00-001000			
28	1.4	0.3	0.4	14	150-XX-328-00-001000	153-10-328-00-001000			
20	1.0	0.4	0.5	20	150-XX-420-00-001000	153-10-420-00-001000			
22	1.1	0.4	0.5	18	150-XX-422-00-001000	153-10-422-00-001000			
24	1.2	0.4	0.5	16	150-XX-424-00-001000	153-10-424-00-001000			
28	1.4	0.4	0.5	14	150-XX-428-00-001000	153-10-428-00-001000			
32	1.6	0.4	0.5	12	150-XX-432-00-001000	153-10-432-00-001000			
24	1.2	0.6	0.7	16	150-XX-624-00-001000	153-10-624-00-001000			
28	1.4	0.6	0.7	14	150-XX-628-00-001000	153-10-628-00-001000			
32	1.6	0.6	0.7	12	150-XX-632-00-001000	153-10-632-00-001000			
36	1.8	0.6	0.7	11	150-XX-636-00-001000	153-10-636-00-001000			
40	2.0	0.6	0.7	10	150-XX-640-00-001000	153-10-640-00-001000			
42	2.1	0.6	0.7	9	150-XX-642-00-001000	153-10-642-00-001000			
48	2.4	0.6	0.7	8	150-XX-648-00-001000	153-10-648-00-001000			
50	2.5	0.6	0.7	8	150-XX-650-00-001000	153-10-650-00-001000			
52	2.6	0.6	0.7	7	150-XX-652-00-001000	153-10-652-00-001000			
50	2.5	0.9	1.0	8	150-XX-950-00-001000	153-10-950-00-001000			
52	2.6	0.9	1.0	7	150-XX-952-00-001000	153-10-952-00-001000			
64	3.2	0.9	1.0	6	150-XX-964-00-001000	153-10-964-00-001000			
SPECIFY PLATING CODE XX=					10 ◇	90		40 ◇	
Pin Plating					10μ" Au	200μ" Sn/Pb		200μ" Sn	