


**Fig. 1**

- Series 334 Interconnect header strips are available in 5 lengths:


334...020 uses pin #3402 ( L = .190" )  
 334...010 uses pin #3401 ( L = .236" )  
 334...050 uses pin #3405 ( L = .315" )  
 334...000 uses pin #3400 ( L = .606" )  
 334...100 uses pin #3410 ( L = 1.070" )  
 See pages 182 for details.

- Strips come with .020" pluggable solder tails at one end and .030" tails at the other.
- Insulators are high temp. thermoplastic.

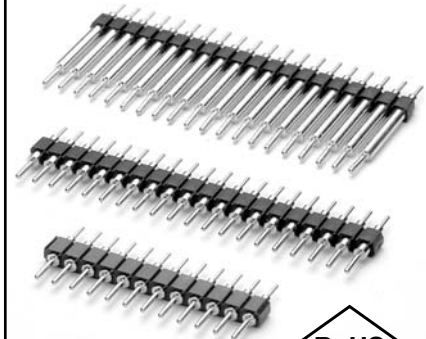


### Ordering Information


<b>Fig. 1</b>	<b>Series 334...020</b> .020 / .030 Solder Tails
	334-XX-1__-00-020000 Specify # of pins    →    01-64
<b>Fig. 2</b>	<b>Series 334...010</b> .020 / .030 Solder Tails
	334-XX-1__-00-010000 Specify # of pins    →    01-64
<b>Fig. 3</b>	<b>Series 334...050</b> .020 / .030 Solder Tails
	334-XX-1__-00-050000 Specify # of pins    →    01-64
<b>Fig. 4</b>	<b>Series 334...000</b> .020 / .030 Solder Tails
	334-XX-1__-00-000000 Specify # of pins    →    01-64
<b>Fig. 5</b>	<b>Series 334...100</b> .020 / .030 Solder Tails
	334-XX-1__-00-100000 Specify # of pins    →    01-64

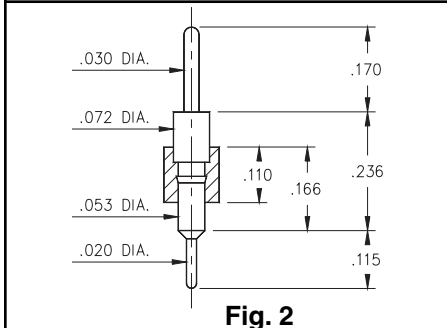


**Fig. 2**

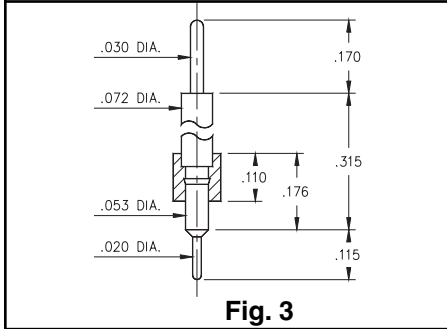

**Fig. 3**

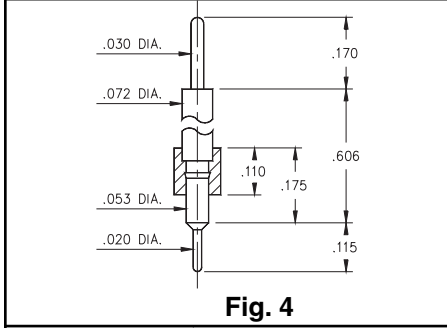

**Fig. 4**

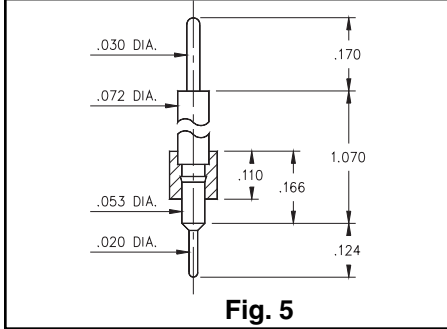

**Fig. 5**

*For Electrical, Mechanical & Environmental Data, See pg. 4*

*XX=Plating Code See Below*

*For RoHS compliance select ◇ plating code.*

SPECIFY PLATING CODE XX=	<b>10</b> ◇	<b>90</b>	<b>40</b> ◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	