
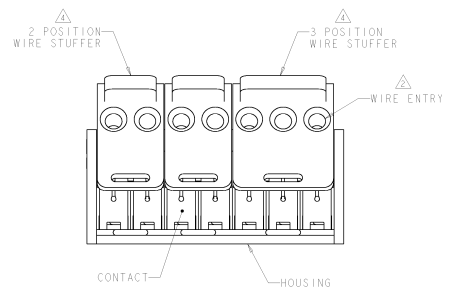

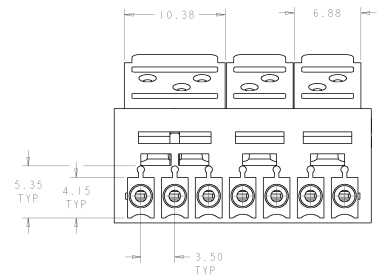



DATE: 08/08/04  
 BY: TERRY L. BUCHANAN  
 CHECKED BY: TERRY L. BUCHANAN

REV. NO.		DESCRIPTION		DATE	BY	CHKD.
0	1	RELEASED	08/08/04			



- △ MATERIAL AND FINISH:  
 HOUSING: POLYESTER, COLOR: GREEN.  
 WIRE STUFFERS: POLYCARBONATE, COLOR: CLEAR.  
 CONTACT: COPPER ALLOY, 3.00µm MINIMUM TIN OVER 1.27µm NICKEL.
- △ WIRE ENTRY ACCEPTS ONE UNSTRIPPED, STRANDED OR SOLID COPPER 22-24 AWG WIRE WITH A MAXIMUM INSULATION DIAMETER OF 1.52mm. RECOMMENDED WIRE INSULATION IS PVC. THIS CONNECTOR MAY NOT FUNCTION CORRECTLY WITH SRPVC OR ANY OTHER RIGID OR SEMI-RIGID INSULATION. CONTACT TYCO FOR ALL OTHER WIRE INSULATION APPROVAL BEFORE USE.
- 3. MATES WITH 3.5mm OPEN AND CLOSED-END INDUSTRY STANDARD HEADERS.
- △ ODD POSITION ASSEMBLIES USE ONE 3 POSITION WIRE STUFFER LOCATED OVER THE LAST THREE POSITIONS AS SHOWN AND 2 POSITION WIRE STUFFERS FOR REMAINING POSITIONS.
- 5. ASSEMBLIES SHIPPED WITH WIRE STUFFERS IN THE OPEN POSITION.

58.00	16	1-1776282-6
54.50	15	1-1776282-5
51.00	14	1-1776282-4
47.50	13	1-1776282-3
44.00	12	1-1776282-2
40.50	11	1-1776282-1
37.00	10	1-1776282-0
33.50	9	1776282-9
30.00	8	1776282-8
26.50	7	1776282-7
23.00	6	1776282-6
19.50	5	1776282-5
16.00	4	1776282-4
12.50	3	1776282-3
9.00	2	1776282-2

BUCHANAN 22-24 AWG 3.5mm		TERRY L. BUCHANAN HARRISBURG, PA 17108-1808	
PART NUMBER 1-1776282-6		NO. OF POSN 16	
MATERIAL POLYESTER		FINISH GREEN	