
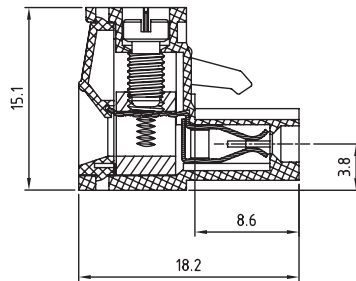



1 2 3 4 5



TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 METAL HOUSING: BRASS (CuZn)
 TERMINAL SCREW: STEEL ZINC PLATING "-" SLOT TYPE
 WIRE GUARD: PbZn TIN PLATED

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	20A	20A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV
CONTACT RESISTANCE:	20 mOhm MAX	

MECHANICAL	24-12 AWG	0.20-3.0MM ²
SOLID WIRE:	24-12 AWG	0.20-3.0MM ²
STRANDED WIRE:	5Lb.In / 0.5Nm	
TORQUE:		

WIRE STRIPE LENGTH: 7-8MM
 SCREW: M3
 PITCH: 5.08MM

PACKAGING: BOX

SERIE 351

CERTIFICATION



RoHS Compliant

G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: SERIE 351 - 5.08MM VERTICAL CABLE ENTRY PLUG 3.0MM ² WIRES WR-TBL WERI PART NO: 691 351 500 0xx	SIZE A4
F								
E								
D								
C								
B	29-OCT-08	CHARACTERISTICS	JP	APPROVAL: RJ	UNIT: MM			
A	31-OCT-07	PDF	EC		SCALE:			
REV	DATE	FILE	BY		SHEET: 1/1			
					DRAW: MARVIN			