

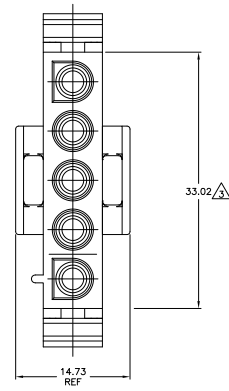
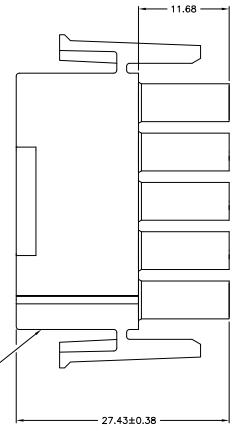
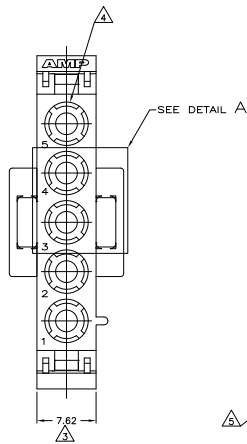


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED


REV	DATE	DESCRIPTION	BY	APP
CM 5.3	7/12	REVISED PER EDD-11-004587	11MR11	RK HMR



- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [0.5 LBS].
- ⚠ DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
 - ⚠ FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
 - ⚠ UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.



DETAIL A
 OPTIONAL CONSTRUCTION



BLACK	1-350809-9
GRAY	1-350809-8
BLUE	1-350809-6
GREEN	1-350809-5
YELLOW	1-350809-4
ORANGE	1-350809-3
RED	1-350809-2
BROWN	1-350809-1
SUPERCEDED BY 1-350809-9	
BLACK	350809-2
NATURAL	350809-1
COLOR	PART NO.

MM	IN
33.02	1.300
27.43	1.080
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN

CONVERSION TABLE
 488 (2/11)



THIS DRAWING IS A CONTROLLED DOCUMENT.

DESCRIPTION	QUANTITY	UNIT	DATE	BY	APP
PLUG, 5 CIRCUIT, UNIVERSAL MATE-N-LOK™	1	EA	11/11	11MR11	RK HMR

DATE: 11/11
 DRAWING NO: 350809
 CUSTOMER DRAWING