


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 (C) COPYRIGHT 19 BY AMP INCORPORATED, ALL RIGHTS RESERVED.

REVISIONS					
P	LYR	DESCRIPTION	ECN	DATE	OWN APVD
D		再作成 (REDRAWN)	FJ00-0871-98	8 Jun 98	KK MS
D1		REV PER ECO-10-000444		08JAN10	KK AEG

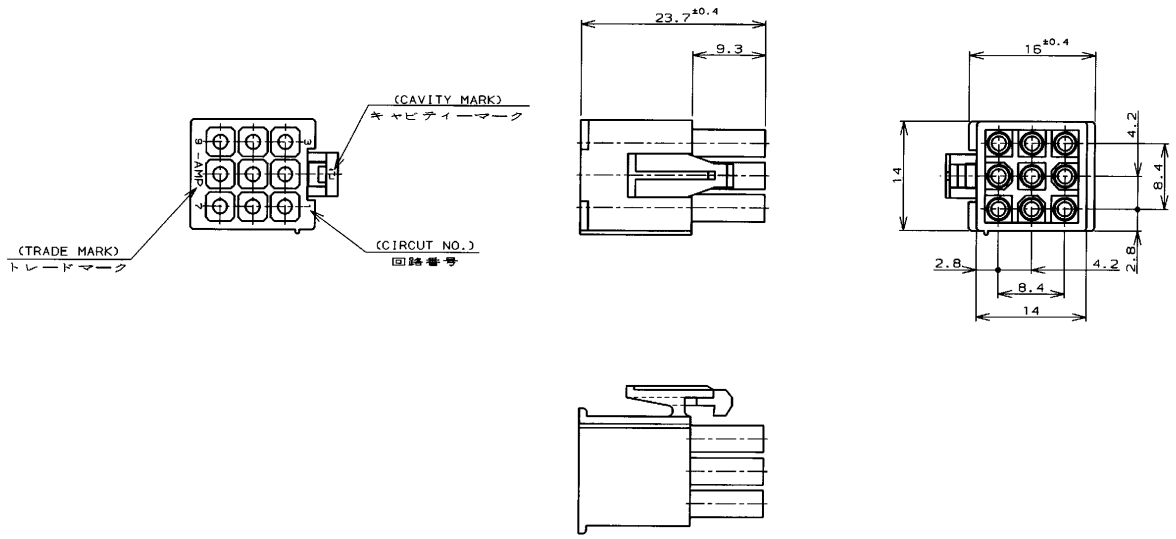

注記;  
 1. 使用端子型番は170359, 170360, 170361, 170362  
 2. 嵌合相手ハウジング型番は172161

NOTE;  
 1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362  
 2. MATING HSG P/N: 172161

△  
 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	黒 (BLACK)	1-172169-9
	青 (BLUE)	1-172169-6
	緑 (GREEN)	1-172169-5
	赤 (RED)	1-172169-2
	自然色 (NATURAL)	172169-1
	色 (COLOR)	型番 (P/N)
	WIRE RANGE	INSULATION DIA

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		JUN 8 Jun 98 M. Tanigaki M. S. 15 Jun 98 M. S. 15 Jun 98	
DIMENSIONS 単位: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 (GENERAL TOLERANCE) ±0.3	
MATERIAL 66ナイロン UL94V-0 (66NYLON UL94V-0)		FINISH 仕上	
PRODUCT SPEC 108-5138 INSTRUCTION SHEET IS-105J		NAME AMP 株式会社 Kawasaki, Japan	
WEIGHT		SIZE (CAGE CODE) A3 00779	
CUSTOMER DRAWING		DRAWING NO. 172169	
SCALE 2-1		SHEET OF 1 1 REV D1	

AMP1470-19 REV 10/93  
 ptj00006

参考図面