





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 (C) COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

REVISONS		DATE	DWN	APVD
P	LTR	DESCRIPTION	ECN	
	C	再作成 (REDRAWN)	FJ00-0871-98	8 Jun 98
	C1	REV PER ECO-10-000444		08JAN10 KK AEG

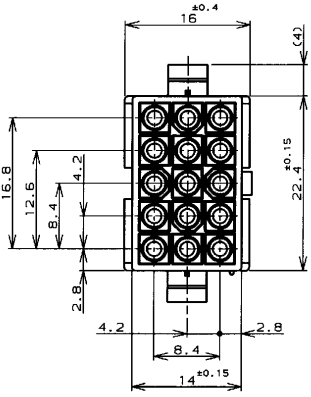

- 注記;
1. 使用端子型番は170359, 170360, 170361, 170362
 2. 嵌合相手ハウジング型番は172171
 3. 適用パネル厚 0.8-2.0mm
 4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
- 表1参照

- NOTE;
1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362
 2. MATING HSG P/N: 172171
 3. APPLICABLE PANEL THICKNESS: 0.8-2.0mm
 4. HOUSING INSERTION INTO THE PANEL CUT-OUT MUST BE DONE IN THE SAME DIRECTION WITH PUNCH KNOCKING.
- SEE TABLE 1
- OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



寸法公差は±0.20
 (TOLERANCE: ±0.20)

パネル取付穴
 (RECOMMENDED PANEL OPENING DIMENSION)

表 1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACES)
-AMP OR AMP	日本 (JAPAN)
-+AMP OR AMP	中国 (CHINA/PRO)

黒 (BLACK)	1-172163-9
青 (BLUE)	1-172163-8
緑 (GREEN)	1-172163-5
赤 (RED)	1-172163-2
自然色 (NATURAL)	172163-1
色 (COLOR)	型番 (P/N)
WIRE RANGE 適合電線断面積	INSULATION DIA 被覆外径

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP. INFORMATION IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DAN 4 Jun 98 CTR M. S. 15 Jun 98 APVD M. S. 15 Jun 98 PRODUCT SPEC 108-5138 INSTRUCTION SHEET 取付図 IS-105J WEIGHT ---	
DIMENSIONS: 単位: 概 mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 (GENERAL TOLERANCES) ±0.3	
MATERIAL 66ナイロン UL94V-0 (66NYLON UL94V-0) FINISH 仕上		NAME 名称 15極ミニユニバーサルメイトンロックキャップハウジング (UL94V-0) 15Pos MINI UNIVERSAL MATE-N-LOCK CONN. CAP HOUSING (UL94V-0) SIZE (CASE CODE) DRAWING NO. A3 00779 型番 172163 RESTRICTED TO CUSTOMER DRAWING SCALE 2-1 SHEET 1 OF 1 REV C1	

AMP1470-19 REV 10/93
 ptj00006

参考図面