


UNCONTROLLED DOCUMENT

SC:0.25	PART NUMBER	REV.
	SSF-LXH504AYGID	A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10651.	8.22.00

UNDER REVISION

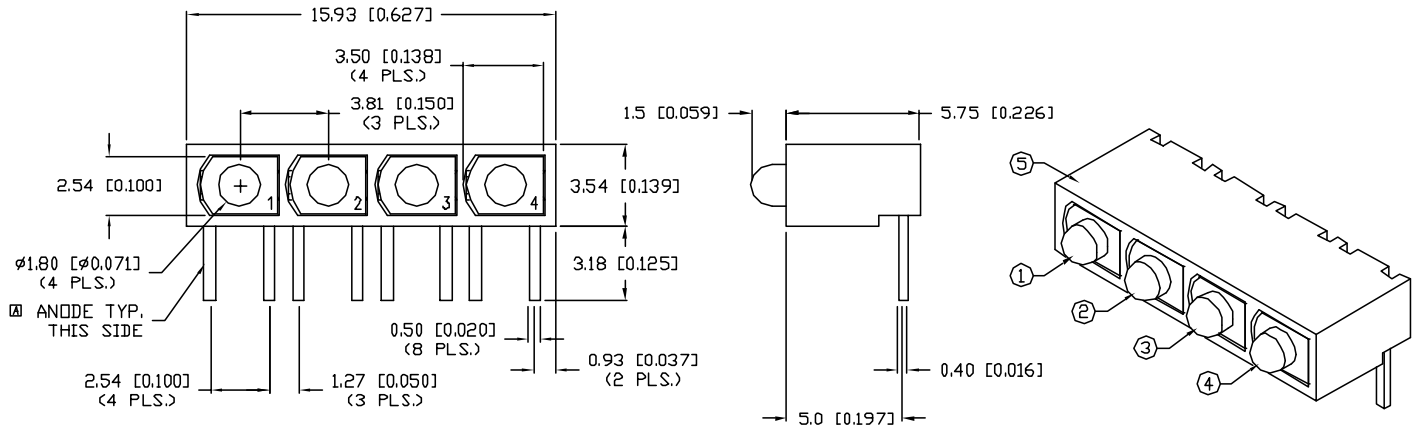

ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^\circ\text{C}$ $I_f=20\text{mA}$

PARAMETER	AMBER	YELLOW	GREEN	RED	UNITS	TEST COND
PEAK WAVELENGTH	610	585	565	635	nm	
FORWARD VOLTAGE (TYP.)	2.0	2.1	2.2	2.0	V _f	
FORWARD VOLTAGE (MAX.)	2.5	2.5	2.6	2.5	V _f	
REVERSE VOLTAGE	5.0	5.0	5.0	5.0	V _r	$I_f=100\mu\text{A}$
AXIAL INTENSITY	30	20	20	30	md	$I_f=20\text{mA}$
VIEWING ANGLE	70	70	70	70	2x theta	
LED POSITION:	1	2	3	4		

EPOXY LENS FINISH: DIFFUSED SAME AS EMITTED COLOR

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(A/Y/G/R)	30/30/25/30	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.6	mW/°C
OPERATING, STORAGE TEMP.		-40 TO +85	°C
SOLDERING TEMP.		+260	°C
2.0mm FROM BODY		3 SEC. MAX	


* $t < 10\mu\text{s}$

NOTES:

1. SSL-LX20333AD, AMBER LED.
2. SSL-LX20333YD, YELLOW LED.
3. SSL-LX20333GD, GREEN LED.
4. SSL-LX20333ID, RED LED.
5. SSH-LXH504, BLACK HOLDER.
6. PARTS TO BE PACKED IN ANTI-STATIC TUBES.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), NN=±0.001 (DECIMAL PRECISION), MAX.=±0.001 (DECIMAL PRECISION)

UNCONTROLLED DOCUMENT

REV. A	PART NUMBER SSF-LXH504AYGID	<p>CONFIDENTIAL INFORMATION</p> <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</p> <p>RELIABILITY NOTE</p> <p>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.</p>	 <p>290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw</p>
RIGHT ANGLE, QUAD HORIZONTAL RANCH FAULT INDICATOR, AMBER/YELLOW/GREEN/RED LEDS, EMITTED COLOR DIFFUSED.		<p>DRAWN BY: KS/BC</p> <p>CHECKED BY:</p> <p>APPROVED BY:</p>	<p>DATE: 6.30.98</p> <p>PAGE: 1 OF 1</p> <p>SCALE: N/A</p>