




Series 5: High Speed Epitaxial P-I-N Photodiodes

In addition to these photodiodes, Pacific Silicon Sensor can design and manufacture other devices, in differing sizes or shape, in original packaging and/or with similar specifications; both single elements as well as arrays. Like all our photodiodes, they can be housed in the most appropriate package for your application.

Whatever your light sensing needs...
Make Pacific Silicon Sensor your solution.

Table with 13 columns: Part Number, Active Area (Size and Area), Responsivity, Shunt Resistance, Capacitance (0V and 20V), Id, Rise Time (0V and 20V), N.E.P. (0V and 20V), and Pkg. Rows include PS0.25-5, PS0.9-5, PS3.6-5, and PS11.9-5.

Test conditions: 22°C: All values typical.

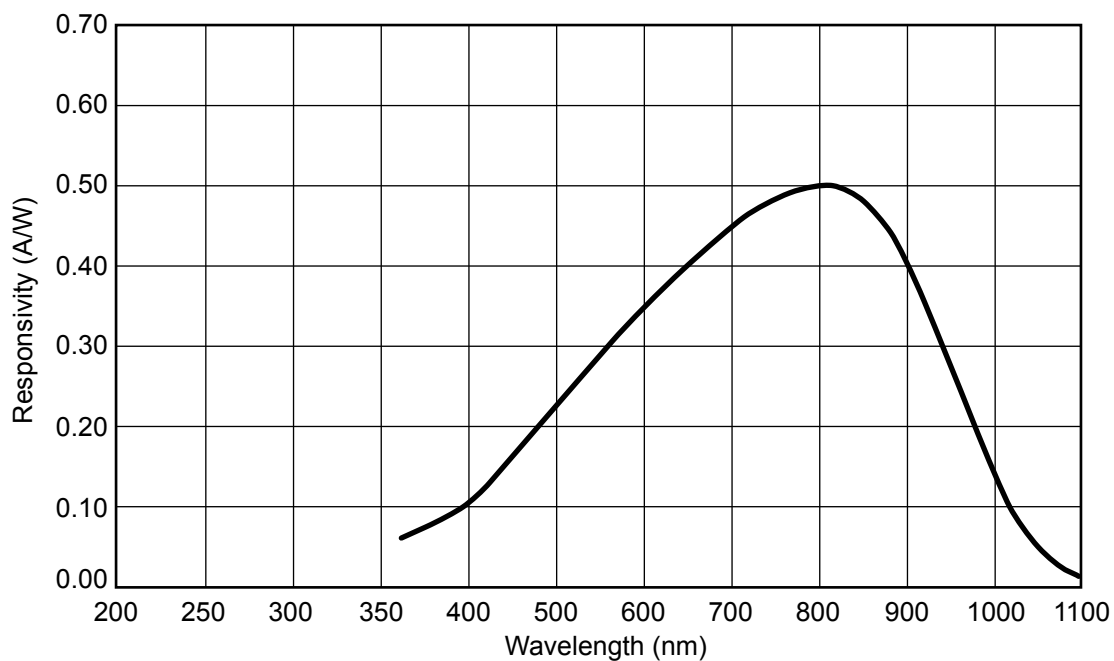

5700 Corsa Avenue, #105, Westlake Village, CA 91362

Phone: (818) 706-3400, Fax: (818) 889-7053, Email: sales@pacific-sensor.com, Web site: www.pacific-sensor.com