

# Aluminum Capacitors + 85 °C , Miniature, Axial Lead




Fig.1 Component outline

## FEATURES

- High CV per case size
- Low cost
- Solvent resistant construction (through 100 WVDC)

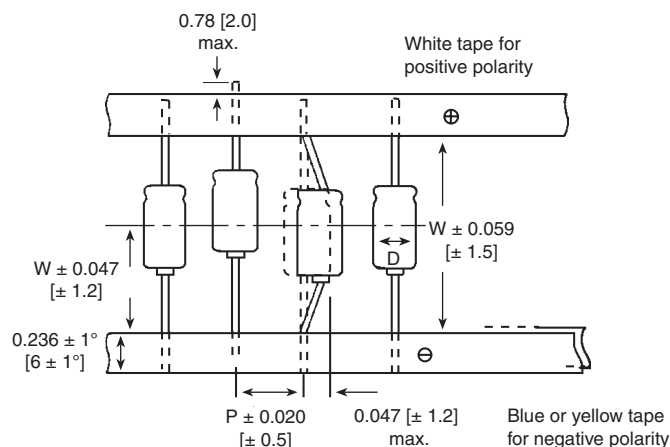

**RoHS**  
COMPLIANT

| QUICK REFERENCE DATA                    |   |
|---|---|
| DESCRIPTION                             | VALUE   |
| Nominal case size<br>Ø D x L in mm      | 0.197" x 0.472" [5.0 x 12.0]<br>to 0.709" x 1.614" [18.0 x 41.0]  |
| Operating temperature                   | - 40 °C to + 85 °C<br>(- 25 °C to + 85 °C for<br>315 WVDC - 450 WVDC units)   |
| Rated Capacitance range, C <sub>R</sub> | 0.47 µF to 10 000 µF  |
| Tolerance on C <sub>R</sub>             | ± 20 %  |
| Rated voltage range, U <sub>R</sub>     | 6.3 WVDC to 450 WVDC  |
| Termination                             | 2 axial leads   |
| Life validation test at 85 °C           | 2000 h: ΔCAP ≤ 20 % from initial<br>measurement.<br>ΔDF x 2 initial specified limit.<br>ΔDCL ≤ initial specified limit.   |
| Shelf life at 85 °C                     | 1000 h: Δ CAP ± 20 % from initial<br>measurement.<br>ΔDF 2 x initial specified limit.<br>ΔDCL ≤ the initial specified limit.  |
| DC leakage current                      | rated voltage for 1 min for<br>6.3 WVDC to 100 WVDC units<br>I < 0.03 CV or 4 µA<br>(whichever is greater)<br>rated voltage for 2 min for<br>6.3 WVDC to 100 WVDC units<br>I < 0.01 CV or 3 µA<br>(whichever is greater)<br>rated voltage for 1 min for<br>160 WVDC to 450 WVDC units<br>I < 0.1 CV + 40 µA and CV ≤ 1000<br>I < 0.04 CV + 100 µA and CV > 1000 |

| RIPPLE CURRENT MULTIPLIERS      |                |          |            |             |       |          |
|---------------------------------|----------------|----------|------------|-------------|-------|----------|
| TEMPERATURE                     |                |          |            |             |       |          |
| Ambient Temperature             |                |          |            | Multipliers |       |          |
| ≤ + 70 °C                       |                |          |            | 1.27        |       |          |
| + 85 °C                         |                |          |            | 1.0         |       |          |
| FREQUENCY (Hz)/CAPACITANCE (µF) |                |          |            |             |       |          |
| WVDC                            | Cap. (µF)      | 50 to 60 | 100 to 120 | 300 to 400  | 1 kHz | ≤ 10 kHz |
| 6.3 to 100                      | 0 to 47        | 0.75     | 1          | 1.35        | 1.57  | 2.00     |
|                                 | 100 to 470     | 0.80     | 1          | 1.23        | 1.34  | 1.50     |
|                                 | 1000 to 10 000 | 0.85     | 1          | 1.10        | 1.13  | 1.15     |
| 160 to 450                      | 1 to 100       | 0.80     | 1          | 1.25        | 1.40  | 1.60     |

| LOW TEMPERATURE PERFORMANCE   |                     |                     |
|---|---------------------|---------------------|
| MAXIMUM IMPEDANCE RATIO Z <sup>(T)</sup> /Z <sup>(+20 °C)</sup> MAXIMUM AT 120 Hz |                     |                     |
| Rated Voltage (WVDC)  | Z - 25 °C/Z + 20 °C | Z - 40 °C/Z + 20 °C |
| 6.3   | 4.0                 | 10.0                |
| 10.0  | 3.0                 | 8.0                 |
| 16.0  | 2.0                 | 6.0                 |
| 25.0  | 2.0                 | 4.0                 |
| 35.0 to 100.0   | 2.0                 | 3.0                 |
| 160.0 to 250.0  | 4.0                 | 12.0                |
| 315.0 to 350.0  | 6.0                 | -                   |
| 400.0 to 450.0  | 15.0                | -                   |

| DIMENSIONS in inches [millimeters] |                            |               |                    |           |                             |               |                    |
|------------------------------------|----------------------------|---------------|--------------------|-----------|-----------------------------|---------------|--------------------|
| CASE CODE                          | NOMINAL CASE SIZE D x L    | LEAD DIAMETER | TYPICAL WEIGHT (g) | CASE CODE | NOMINAL CASE SIZE D x L     | LEAD DIAMETER | TYPICAL WEIGHT (g) |
| JL                                 | 0.197 x .472 [5.0 x 12.0]  | 0.024 [0.6]   | 0.56               | NR        | 0.394 x 0.984 [10.0 x 25.0] | 0.024 [0.6]   | 3.10               |
| LL                                 | 0.248 x .472 [6.3 x 12.0]  | 0.024 [0.6]   | 0.74               | PR        | 0.512 x 1.023 [13.0 x 26.0] | 0.024 [0.6]   | 4.63               |
| LM                                 | 0.248 x .472 [6.3 x 12.0]  | 0.024 [0.6]   | 0.91               | PS        | 0.512 x 1.240 [13.0 x 31.5] | 0.024 [0.6]   | 5.47               |
| MM                                 | 0.315 x .630 [8.0 x 16.0]  | 0.024 [0.6]   | 1.00               | QS        | 0.630 x 1.240 [16.0 x 31.5] | 0.031 [0.8]   | 8.26               |
| MN                                 | 0.315 x .787 [8.0 x 20.0]  | 0.024 [0.6]   | 1.70               | QT        | 0.630 x 1.633 [16.0 x 41.5] | 0.031 [0.8]   | 10.42              |
| NP                                 | 0.394 x .827 [10.0 x 21.0] | 0.024 [0.6]   | 2.32               | RT        | 0.709 x 1.614 [18.0 x 41.0] | 0.031 [0.8]   | 12.42              |

**DIMENSIONS** in inches [millimeters]**DIMENSIONS** in inches [millimeters] **AND PACKAGING QUANTITIES**

| CASE CODE | TAPING CODE | SPECIFICATIONS                 |                                     |                   |
|-----------|-------------|--------------------------------|-------------------------------------|-------------------|
|           |             | TAPE WIDTH $W \pm 0.059$ [1.5] | COMPONENT PITCH $P \pm 0.020$ [0.5] | QUANTITY PER REEL |
| JL        | B           | 2.063 [52.4]                   | 0.394 [10.0]                        | 1600              |
| LL        | B           | 2.063 [52.4]                   | 0.394 [10.0]                        | 1300              |
| LM        | B           | 2.063 [52.4]                   | 0.394 [10.0]                        | 1300              |
| MM        | B           | 2.063 [52.4]                   | 0.394 [10.0]                        | 1000              |
| MN        | B           | 2.500 [63.5]                   | 0.394 [10.0]                        | 1000              |
| NP        | B           | 2.500 [63.5]                   | 0.591 [15.0]                        | 500               |
| NP        | C           | 2.874 [73.0]                   | 0.591 [15.0]                        | 500               |
| NR        | B           | 2.500 [63.5]                   | 0.591 [15.0]                        | 500               |
| NR        | C           | 2.874 [73.0]                   | 0.591 [15.0]                        | 500               |
| PR        | B           | 2.500 [63.5]                   | 0.591 [15.0]                        | 350               |
| PR        | C           | 2.874 [73.0]                   | 0.591 [15.0]                        | 350               |
| PS        | B           | 2.874 [73.0]                   | 0.591 [15.0]                        | 350               |

**ORDERING EXAMPLE**

Electrolytic capacitor 516D series: 516D 107 M 6R3 JL 6 A E3

| DESCRIPTION |                                       |
|-------------|---------------------------------------|
| CODE        | EXPLANATION                           |
| 516D        | product type                          |
| 107         | capacitance value (100 $\mu$ F)       |
| M           | tolerance (M = $\pm 20$ %)            |
| 6R3         | voltage rating at 85 °C (6R3 = 6.3 V) |
| JL          | can size (see dimensions table)       |
| 6           | packaging (bulk)                      |
| A           | lead style (uncut)                    |
| E3          | RoHS compliant indicator              |

**PACKING AND LEAD STYLES:**

- 6A Bulk, uncut leads
- 7B Tape and reel. For case codes JL, LL, LM, MM, MN, NP, NR, PR and PS only.
- 7C Tape and reel with 2.874" [73.0] mm tape width. For case codes NP, NR and PR only.

\* Suffix E3 denotes lead (Pb)-free/RoHS compliant products



| <b>ELECTRICAL DATA AND ORDERING INFORMATION</b> |                    |                                    |                          |  |   |
|---|--------------------|------------------------------------|--------------------------|--|---|
| <b>CAPACITANCE<br/>(<math>\mu</math>F)</b>      | <b>PART NUMBER</b> | <b>NOMINAL CASE SIZE<br/>D x L</b> | <b>LEAD<br/>DIAMETER</b> | <b>MAX. DF<br/>AT + 20 °C<br/>120 Hz</b> | <b>MAX. RIPPLE<br/>AT + 85 °C/120 Hz<br/>(mA<sub>rms</sub>)</b> |
| <b>6.3 WVDC at + 85 °C, SURGE = 8 V</b>         |                    |                                    |                          |  |   |
| 100   | 516D107M6R3JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.24                                     | 110   |
| 220   | 516D227M6R3LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.24                                     | 200   |
| 330   | 516D337M6R3LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.24                                     | 250   |
| 470   | 516D477M6R3MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.24                                     | 330   |
| 1000  | 516D108M6R3NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.24                                     | 600   |
| 2200  | 516D228M6R3PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.24                                     | 1020  |
| 3300  | 516D338M6R3PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.24                                     | 1200  |
| 4700  | 516D478M6R3QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.024 [0.6]              | 0.24                                     | 1500  |
| 6800  | 516D688M6R3QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.24                                     | 1840  |
| 10 000  | 516D109M6R3QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.24                                     | 2260  |
| <b>10 WVDC at + 85 °C, SURGE = 13 V</b>         |                    |                                    |                          |  |   |
| 33  | 516D336M010JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.2                                      | 65  |
| 47  | 516D476M010JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.2                                      | 80  |
| 100   | 516D107M010LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.2                                      | 130   |
| 220   | 516D227M010LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 210   |
| 330   | 516D337M010MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 300   |
| 470   | 516D477M010MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 350   |
| 1000  | 516D108M010NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.2                                      | 640   |
| 2200  | 516D228M010PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 1090  |
| 3300  | 516D338M010PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.2                                      | 1390  |
| 4700  | 516D478M010QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.2                                      | 1730  |
| 6800  | 516D688M010QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.2                                      | 1930  |
| 10 000  | 516D109M010RT6AE3  | 0.709 x 1.614 [18.0 x 41.0]        | 0.031 [0.8]              | 0.2                                      | 2350  |
| <b>16 WVDC at + 85 °C, SURGE = 20 V</b>         |                    |                                    |                          |  |   |
| 22  | 516D226M016JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.16                                     | 60  |
| 33  | 516D336M016JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.16                                     | 70  |
| 47  | 516D476M016JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.16                                     | 85  |
| 100   | 516D107M016LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.16                                     | 160   |
| 220   | 516D227M016MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.16                                     | 260   |
| 330   | 516D337M016MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.16                                     | 320   |
| 470   | 516D477M016MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.16                                     | 430   |
| 1000  | 516D108M016NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.16                                     | 770   |
| 2200  | 516D228M016PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.16                                     | 1180  |
| 3300  | 516D338M016QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.16                                     | 1620  |
| 4700  | 516D478M016QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.16                                     | 1840  |
| 6800  | 516D688M016RT6AE3  | 0.709 x 1.614 [18.0 x 41.0]        | 0.031 [0.8]              | 0.16                                     | 2310  |
| <b>25 WVDC at + 85 °C, SURGE = 32 V</b>         |                    |                                    |                          |  |   |
| 10.0  | 516D106M025JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.14                                     | 40  |
| 22  | 516D226M025JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.14                                     | 65  |
| 33  | 516D336M025JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.14                                     | 80  |
| 47  | 516D476M025LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.14                                     | 100   |
| 100   | 516D107M025LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.14                                     | 170   |
| 220   | 516D227M025MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.14                                     | 280   |
| 330   | 516D337M025MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.14                                     | 380   |
| 470   | 516D477M025NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.14                                     | 510   |
| 1000  | 516D108M025PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.14                                     | 900   |



| <b>ELECTRICAL DATA AND ORDERING INFORMATION</b> |                    |                                    |                          |  |   |
|---|--------------------|------------------------------------|--------------------------|--|---|
| <b>CAPACITANCE<br/>(<math>\mu</math>F)</b>      | <b>PART NUMBER</b> | <b>NOMINAL CASE SIZE<br/>D x L</b> | <b>LEAD<br/>DIAMETER</b> | <b>MAX. DF<br/>AT + 20 °C<br/>120 Hz</b> | <b>MAX. RIPPLE<br/>AT + 85 °C/120 Hz<br/>(mA<sub>rms</sub>)</b> |
| <b>25 WVDC at + 85 °C, SURGE = 32 V</b>         |                    |                                    |                          |  |   |
| 2200  | 516D228M025QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.14                                     | 1480  |
| 3300  | 516D338M025QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.14                                     | 1710  |
| 4700  | 516D478M025RT6AE3  | 0.709 x 1.614 [18.0 x 41.0]        | 0.031 [0.8]              | 0.14                                     | 2170  |
| <b>35 WVDC at + 85 °C, SURGE = 44 V</b>         |                    |                                    |                          |  |   |
| 10  | 516D106M035JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.12                                     | 45  |
| 22  | 516D226M035JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.12                                     | 70  |
| 33  | 516D336M035LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.12                                     | 90  |
| 47  | 516D476M035LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.12                                     | 120   |
| 100   | 516D107M035MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.12                                     | 210   |
| 220   | 516D227M035MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.12                                     | 340   |
| 330   | 516D337M035NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.12                                     | 460   |
| 470   | 516D477M035NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.12                                     | 610   |
| 1000  | 516D108M035PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.12                                     | 1060  |
| 2200  | 516D228M035QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.12                                     | 1580  |
| 3300  | 516D338M035QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.12                                     | 2050  |
| <b>50 WVDC at + 85 °C, SURGE = 63 V</b>         |                    |                                    |                          |  |   |
| 0.47  | 516D474M050JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 5   |
| 1.0   | 516D105M050JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 10  |
| 2.2   | 516D225M050JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 23  |
| 3.3   | 516D335M050JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 28  |
| 4.7   | 516D475M050JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 34  |
| 10  | 516D106M050JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 50  |
| 22  | 516D226M050LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.1                                      | 85  |
| 33  | 516D336M050LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.1                                      | 110   |
| 47  | 516D476M050LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.1                                      | 130   |
| 100   | 516D107M050MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.1                                      | 220   |
| 220   | 516D227M050NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.1                                      | 410   |
| 330   | 516D337M050NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.1                                      | 560   |
| 470   | 516D477M050PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.8]              | 0.1                                      | 730   |
| 1000  | 516D108M050QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.1                                      | 1260  |
| 2200  | 516D228M050RT6AE3  | 0.709 x 1.614 [18.0 x 41.0]        | 0.031 [0.8]              | 0.1                                      | 1920  |
| <b>63 WVDC at + 85 °C, SURGE = 79 V</b>         |                    |                                    |                          |  |   |
| 3.3   | 516D335M063JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 31  |
| 4.7   | 516D475M063JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 37  |
| 10  | 516D106M063JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 55  |
| 22  | 516D226M063LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 90  |
| 33  | 516D336M063LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.08                                     | 120   |
| 47  | 516D476M063MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.08                                     | 160   |
| 100   | 516D107M063MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.08                                     | 260   |
| 220   | 516D227M063NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.08                                     | 480   |
| 330   | 516D337M063PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.08                                     | 650   |
| 470   | 516D477M063PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.08                                     | 840   |
| 1000  | 516D108M063QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.08                                     | 1330  |



| <b>ELECTRICAL DATA AND ORDERING INFORMATION</b> |                    |                                    |                          |  |   |
|---|--------------------|------------------------------------|--------------------------|--|---|
| <b>CAPACITANCE<br/>(<math>\mu</math>F)</b>      | <b>PART NUMBER</b> | <b>NOMINAL CASE SIZE<br/>D x L</b> | <b>LEAD<br/>DIAMETER</b> | <b>MAX. DF<br/>AT + 20 °C<br/>120 Hz</b> | <b>MAX. RIPPLE<br/>AT + 85 °C/120 Hz<br/>(mA<sub>rms</sub>)</b> |
| <b>100 WVDC at + 85 °C, SURGE = 125 V</b>       |                    |                                    |                          |  |   |
| 0.47  | 516D474M100JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 10  |
| 1.0   | 516D105M100JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 18  |
| 2.2   | 516D225M100JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 28  |
| 3.3   | 516D335M100JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 34  |
| 4.7   | 516D475M100JL6AE3  | 0.197 x 0.472 [5.0 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 40  |
| 10  | 516D106M100LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.08                                     | 60  |
| 22  | 516D226M100MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.08                                     | 120   |
| 33  | 516D336M100MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.08                                     | 150   |
| 47  | 516D476M100MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.08                                     | 190   |
| 100   | 516D107M100NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.08                                     | 340   |
| 220   | 516D227M100PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.08                                     | 560   |
| 330   | 516D337M100PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.08                                     | 750   |
| 470   | 516D477M100QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.08                                     | 970   |
| <b>160 WVDC at + 85 °C, SURGE = 200 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M160LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.2                                      | 13  |
| 2.2   | 516D225M160LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 23  |
| 3.3   | 516D335M160MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 33  |
| 4.7   | 516D475M160MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 39  |
| 10  | 516D106M160MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.2                                      | 60  |
| 22  | 516D226M160NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 120   |
| 33  | 516D336M160PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 170   |
| 47  | 516D476M160PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.2                                      | 230   |
| 100   | 516D107M160QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.2                                      | 430   |
| <b>200 WVDC at + 85 °C, SURGE = 250 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M200LL6AE3  | 0.248 x 0.472 [6.3 x 12.0]         | 0.024 [0.6]              | 0.2                                      | 13  |
| 2.2   | 516D225M200LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 23  |
| 3.3   | 516D335M200MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 33  |
| 4.7   | 516D475M200MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 39  |
| 10  | 516D106M200NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.2                                      | 70  |
| 22  | 516D226M200PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 140   |
| 33  | 516D336M200PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 170   |
| 47  | 516D476M200PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.2                                      | 230   |
| 100   | 516D107M200QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.2                                      | 430   |
| <b>250 WVDC at + 85 °C, SURGE = 300 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M250LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 14  |
| 2.2   | 516D225M250MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 27  |
| 3.3   | 516D335M250MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 33  |
| 4.7   | 516D475M250MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.2                                      | 45  |
| 10  | 516D106M250NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.2                                      | 70  |
| 22  | 516D226M250PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 140   |
| 33  | 516D336M250PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.2                                      | 190   |
| 47  | 516D476M250QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.2                                      | 260   |
| 100   | 516D107M250QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.2                                      | 430   |



| <b>ELECTRICAL DATA AND ORDERING INFORMATION</b> |                    |                                    |                          |  |   |
|---|--------------------|------------------------------------|--------------------------|--|---|
| <b>CAPACITANCE<br/>(<math>\mu</math>F)</b>      | <b>PART NUMBER</b> | <b>NOMINAL CASE SIZE<br/>D x L</b> | <b>LEAD<br/>DIAMETER</b> | <b>MAX. DF<br/>AT + 20 °C<br/>120 Hz</b> | <b>MAX. RIPPLE<br/>AT + 85 °C/120 Hz<br/>(mA<sub>rms</sub>)</b> |
| <b>315 WVDC at + 85 °C, SURGE = 365 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M315LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 14  |
| 2.2   | 516D225M315MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.2                                      | 27  |
| 3.3   | 516D335M315MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.2                                      | 36  |
| 4.7   | 516D475M315MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.2                                      | 45  |
| 10  | 516D106M315NR6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.2                                      | 80  |
| 22  | 516D226M315PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.2                                      | 150   |
| 33  | 516D336M315QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.2                                      | 210   |
| 47  | 516D476M315QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.2                                      | 260   |
| <b>350 WVDC at + 85 °C, SURGE = 400 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M350LM6AE3  | 0.248 x 0.630 [6.3 x 16.0]         | 0.024 [0.6]              | 0.25                                     | 12  |
| 2.2   | 516D225M350MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.25                                     | 24  |
| 3.3   | 516D335M350MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.25                                     | 32  |
| 4.7   | 516D475M350NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.25                                     | 46  |
| 10  | 516D106M350PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.25                                     | 85  |
| 22  | 516D226M350PS6AE3  | 0.512 x 1.240 [13.0 x 31.5]        | 0.024 [0.6]              | 0.25                                     | 140   |
| 33  | 516D336M350QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.25                                     | 190   |
| 47  | 516D476M350QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.25                                     | 260   |
| <b>400 WVDC at + 85 °C, SURGE = 450 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M400MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.25                                     | 14  |
| 2.2   | 516D225M400MN6AE3  | 0.315 x 0.787 [8.0 x 20.0]         | 0.024 [0.6]              | 0.25                                     | 28  |
| 3.3   | 516D335M400NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.25                                     | 38  |
| 4.7   | 516D475M400NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.25                                     | 46  |
| 10  | 516D106M400PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.25                                     | 85  |
| 22  | 516D226M400QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.25                                     | 150   |
| 33  | 516D336M400QT6AE3  | 0.630 x 1.633 [16.0 x 41.5]        | 0.031 [0.8]              | 0.25                                     | 210   |
| 47  | 516D476M400RT6AE3  | 0.709 x 1.614 [18.0 x 41.0]        | 0.031 [0.8]              | 0.25                                     | 290   |
| <b>450 WVDC at + 85 °C, SURGE = 500 V</b>       |                    |                                    |                          |  |   |
| 1.0   | 516D105M450MM6AE3  | 0.315 x 0.630 [8.0 x 16.0]         | 0.024 [0.6]              | 0.25                                     | 14  |
| 2.2   | 516D225M450MN6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.25                                     | 31  |
| 3.3   | 516D335M450NP6AE3  | 0.394 x 0.827 [10.0 x 21.0]        | 0.024 [0.6]              | 0.25                                     | 38  |
| 4.7   | 516D475M450NP6AE3  | 0.394 x 1.024 [10.0 x 26.0]        | 0.024 [0.6]              | 0.25                                     | 50  |
| 10  | 516D106M450PR6AE3  | 0.512 x 1.024 [13.0 x 26.0]        | 0.024 [0.6]              | 0.25                                     | 85  |
| 22  | 516D226M450QS6AE3  | 0.630 x 1.240 [16.0 x 31.5]        | 0.031 [0.8]              | 0.25                                     | 150   |
| 33  | 516D336M450QT6AE3  | 0.709 x 1.614 [18.0 x 41.0]        | 0.031 [0.8]              | 0.25                                     | 230   |



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.