

# FB-4SP

Order No.: 2316019




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2316019>

Segment coupler for Foundation Fieldbus and PROFIBUS-PA expansions with terminal connections for 4 spurs connected to Fieldbus end devices.



## Commercial data

GTIN (EAN)	 4 046356 298711
sales group	H681
Pack	1 pcs.
Customs tariff	85176200
Catalog page information	Page 500 (IF-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Serial interface

Interface 1	Foundation Fieldbus and PROFIBUS PA Segment
Connection method	Pluggable COMBICON screw connection for each spur
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>

Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

**Power supply**

Supply voltage range	9 V DC ... 31 V DC (input on trunk line side)
Typical current consumption	3.5 mA

**General data**

Width	17.5 mm
Height	94.3 mm
Depth	70.4 mm
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (operation)	-40 °C ... 70 °C
Standards/regulations	IEC 60529, IEC 61158-2
	NE21
	EN 61326, EN 60068-2-27, EN 60068-2-6
Degree of protection	IP20
Mounting position	On horizontal DIN rail NS 35 in acc. with EN 60715
Net weight	75 g
Color	green
ATEX	Ex II 3 G Ex nA [nL] IIC T4 X
UL, USA / Canada	Class I, Zone 2, Group IIC T4
	Class I, Div. 2, Groups A, B, C, D, T4

**Certificates / Approvals**

Certification Ex: CUL-EX LIS, PxC-EX, UL-EX LIS


**Accessories**

Item	Designation	Description
<b>General</b>		
2316035	FB-PS-25/0.36A	Isolated Foundation Fieldbus Power Supply with integrated Terminator. Multiple single channel modules can be installed using Phoenix Contacts TBUS connector system reducing wiring and installation costs.


2856126	PT 1X2+F-BE	Base element for protective plug PT with protective circuit for a 2-core floating signal circuit. Integrated gas arrester as coarse protection between GND and PE. Mounting on NS 35/7.5 und NS 35/15, housing width: 17.5 mm.
2856058	PT 1X2-24AC-ST	PT protective connector with protective circuit for a 2-wire floating signal circuit. HART-compatible.

**Diagrams/Drawings**

Dimensioned drawing

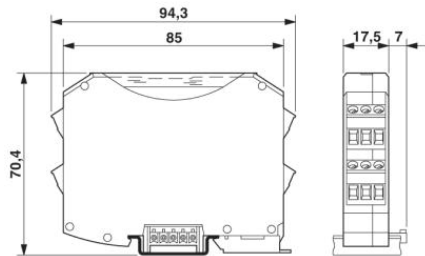

Circuit diagram

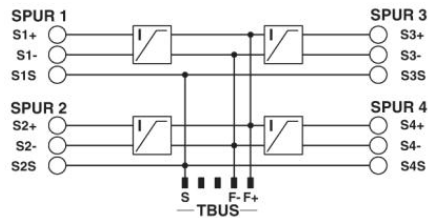

Connection diagram: FB-4SP

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;