

### Description


The PowerStor Aerogel Capacitor is a unique, ultra-high capacitance device based on a novel type of carbon foam, known as carbon aerogel. Aerogel capacitors are similar to supercapacitors, ultracapacitors and electrochemical double layer capacitors (EDLCs) with the added benefit of low ESR (Equivalent Series Resistance).

### Features & Benefits

- High specific capacitance
- Very low ESR
- Low leakage currents
- Long cycle life
- Ultra low ESR also available (A Series)

### Applications

- Main power
- Hybrid battery packs
- Hold-up power
- Pulse power

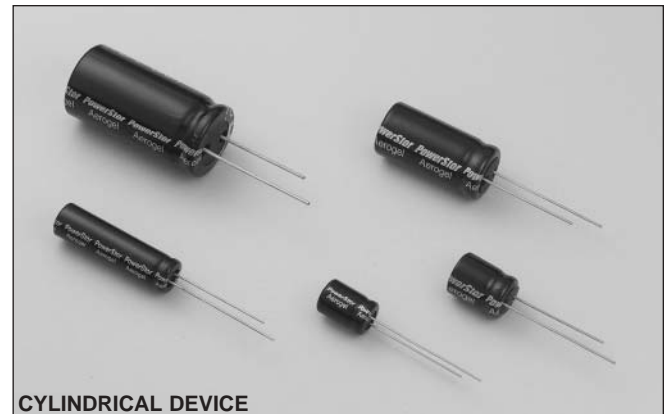

### SPECIFICATIONS

<b>Working Voltage</b>	2.5 volts
<b>Surge Voltage</b>	3.0 volts
<b>Nominal Capacitance Range</b>	0.22 to 50 F
<b>Capacitance Tolerance</b>	-20% to +80% (20°C)
<b>Operating Temperature Range</b>	-25°C to 70°C

### STANDARD PRODUCTS


Nominal Capacitance (F)	Part Number	Nominal ESR (Equivalent Series Resistance) Measured @ 1kHz (Ω)	Nominal Dimensions
0.22	B0510-2R5224	3	Ø = 5 mm; L = 11 mm
1.0	B0810-2R5105	0.400	Ø = 8 mm; L = 13 mm
1.5	B1010-2R5155	0.300	Ø = 10 mm; L = 12.5 mm
2.2	B0820-2R5225	0.200	Ø = 8 mm; L = 20 mm
3.3	B1020-2R5335	0.150	Ø = 10 mm; L = 20.5 mm
4.7	B0830-2R5475	0.150	Ø = 8 mm; L = 30 mm
6.8	B1030-2R5685	0.100	Ø = 10 mm; L = 30 mm
10	B1325-2R5106	0.060	Ø = 13 mm; L = 26 mm
22	B1635-2R5226	0.040	Ø = 16 mm; L = 35 mm
33	B1835-2R5336	0.030	Ø = 18 mm; L = 35 mm
50	B1840-2R5506	0.025	Ø = 18 mm; L = 40 mm

### PERFORMANCE

Parameter	Capacitance Change (% of initial measured value)	ESR (% of initial specified value)
Life (1000 hrs @ 70°C @ 2.5 volts DC)	≤ 30	≤ 300
Storage - low and high temperature (1000 hrs @ -25°C and 70°C)	≤ 30	≤ 300

DIMENSIONS (mm)								
Part Number	D	D'	L	L'	F	d'	C	C'
B0510-2R5224	5.0	5.5	11.5	12.0	2.0	0.50	20.0	5.0
B0810-2R5105	8.0	8.5	13.0	13.5	3.5	0.50	20.0	5.0
B1010-2R5155	10.0	10.5	13.9	14.4	5.0	0.60	20.0	5.0
B0820-2R5225	8.0	8.5	20.5	21.0	3.5	0.50	20.0	5.0
B1020-2R5335	10.0	10.5	21.8	22.3	5.0	0.60	20.0	5.0
B0830-2R5475	8.0	8.5	30.5	31.0	3.5	0.50	20.0	5.0
B1030-2R5685	10.0	10.5	31.0	31.5	5.0	0.60	20.0	5.0
B1325-2R5106	13.0	13.5	27.9	28.4	5.0	0.60	20.0	5.0
B1635-2R5226	16.0	16.5	37.5	38.0	7.5	0.80	20.0	5.0
B1835-2R5336	18.0	18.5	37.5	38.0	7.5	0.80	20.0	5.0
B1840-2R5506	18.0	18.5	41.5	42.0	7.5	0.80	20.0	5.0
					Maximum	± 0.5	± 0.02	Minimum

Note: Longer lead is positive

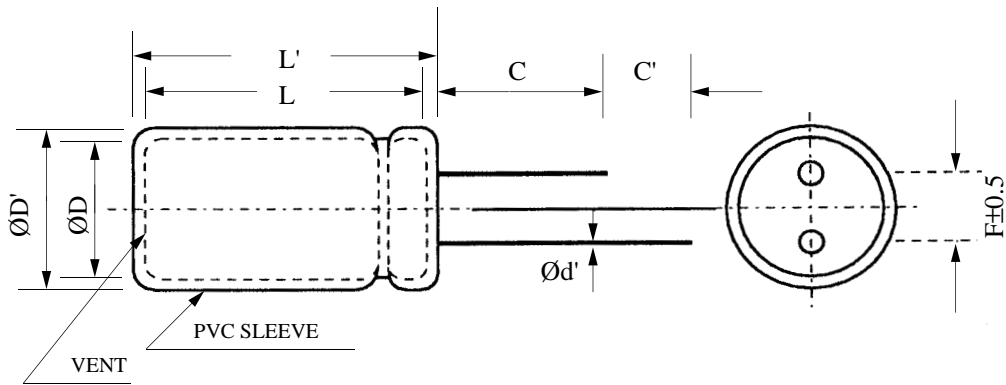

PART NUMBERING SYSTEM											
<b>B</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-	<b>2</b>	<b>R</b>	<b>5</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series Code	Dimensions (mm)					Voltage (V) R is decimal		Capacitance			
B = High Capacitance	Diameter	Length				2R5 = 2.5V		Value	Multiplier		
								Example: 475 = 47 x 10 <sup>5</sup> μ F or 4.7 F			

**PACKAGING INFORMATION**

Standard packaging: Bulk, 100 units per package.

Special packaging available upon request. Contact factory.

**PART MARKING**

- Manufacturer
- Capacitance (F)
- Max. Operating Voltage (V)
- Series Code (or part number)
- Polarity Marking

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.