

Description


The PowerStor Aerogel Capacitor is a unique, ultra-high capacitance device based on a novel type of carbon foam, known as carbon aerogel. Aerogel capacitors are similar to supercapacitors, ultracapacitors and electrochemical double layer capacitors (EDLCs) with the added benefit of low ESR (Equivalent Series Resistance).

Features & Benefits

- High specific capacitance
- Very low ESR
- Low leakage currents
- Long cycle life
- Ultra low ESR also available (A Series)

Applications

- Main power
- Hybrid battery packs
- Hold-up power
- Pulse power

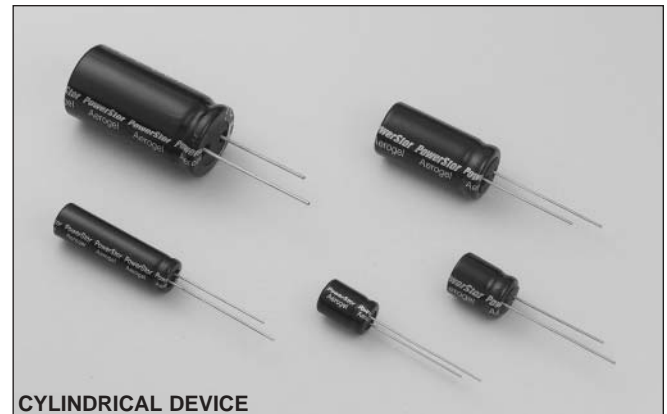

SPECIFICATIONS

| | |
|------------------------------------|---------------------|
| Working Voltage | 2.5 volts |
| Surge Voltage | 3.0 volts |
| Nominal Capacitance Range | 0.22 to 50 F |
| Capacitance Tolerance | -20% to +80% (20°C) |
| Operating Temperature Range | -25°C to 70°C |

STANDARD PRODUCTS


| Nominal Capacitance (F) | Part Number | Nominal ESR (Equivalent Series Resistance) Measured @ 1kHz (Ω) | Nominal Dimensions |
|-------------------------|--------------|--|------------------------|
| 0.22 | B0510-2R5224 | 3 | Ø = 5 mm; L = 11 mm |
| 1.0 | B0810-2R5105 | 0.400 | Ø = 8 mm; L = 13 mm |
| 1.5 | B1010-2R5155 | 0.300 | Ø = 10 mm; L = 12.5 mm |
| 2.2 | B0820-2R5225 | 0.200 | Ø = 8 mm; L = 20 mm |
| 3.3 | B1020-2R5335 | 0.150 | Ø = 10 mm; L = 20.5 mm |
| 4.7 | B0830-2R5475 | 0.150 | Ø = 8 mm; L = 30 mm |
| 6.8 | B1030-2R5685 | 0.100 | Ø = 10 mm; L = 30 mm |
| 10 | B1325-2R5106 | 0.060 | Ø = 13 mm; L = 26 mm |
| 22 | B1635-2R5226 | 0.040 | Ø = 16 mm; L = 35 mm |
| 33 | B1835-2R5336 | 0.030 | Ø = 18 mm; L = 35 mm |
| 50 | B1840-2R5506 | 0.025 | Ø = 18 mm; L = 40 mm |

PERFORMANCE

| Parameter | Capacitance Change (% of initial measured value) | ESR (% of initial specified value) |
|--|--|------------------------------------|
| Life (1000 hrs @ 70°C @ 2.5 volts DC) | ≤ 30 | ≤ 300 |
| Storage - low and high temperature (1000 hrs @ -25°C and 70°C) | ≤ 30 | ≤ 300 |

| DIMENSIONS (mm) | | | | | | | | |
|-----------------|------|------|------|------|---------|-------|--------|---------|
| Part Number | D | D' | L | L' | F | d' | C | C' |
| B0510-2R5224 | 5.0 | 5.5 | 11.5 | 12.0 | 2.0 | 0.50 | 20.0 | 5.0 |
| B0810-2R5105 | 8.0 | 8.5 | 13.0 | 13.5 | 3.5 | 0.50 | 20.0 | 5.0 |
| B1010-2R5155 | 10.0 | 10.5 | 13.9 | 14.4 | 5.0 | 0.60 | 20.0 | 5.0 |
| B0820-2R5225 | 8.0 | 8.5 | 20.5 | 21.0 | 3.5 | 0.50 | 20.0 | 5.0 |
| B1020-2R5335 | 10.0 | 10.5 | 21.8 | 22.3 | 5.0 | 0.60 | 20.0 | 5.0 |
| B0830-2R5475 | 8.0 | 8.5 | 30.5 | 31.0 | 3.5 | 0.50 | 20.0 | 5.0 |
| B1030-2R5685 | 10.0 | 10.5 | 31.0 | 31.5 | 5.0 | 0.60 | 20.0 | 5.0 |
| B1325-2R5106 | 13.0 | 13.5 | 27.9 | 28.4 | 5.0 | 0.60 | 20.0 | 5.0 |
| B1635-2R5226 | 16.0 | 16.5 | 37.5 | 38.0 | 7.5 | 0.80 | 20.0 | 5.0 |
| B1835-2R5336 | 18.0 | 18.5 | 37.5 | 38.0 | 7.5 | 0.80 | 20.0 | 5.0 |
| B1840-2R5506 | 18.0 | 18.5 | 41.5 | 42.0 | 7.5 | 0.80 | 20.0 | 5.0 |
| | | | | | Maximum | ± 0.5 | ± 0.02 | Minimum |

Note: Longer lead is positive

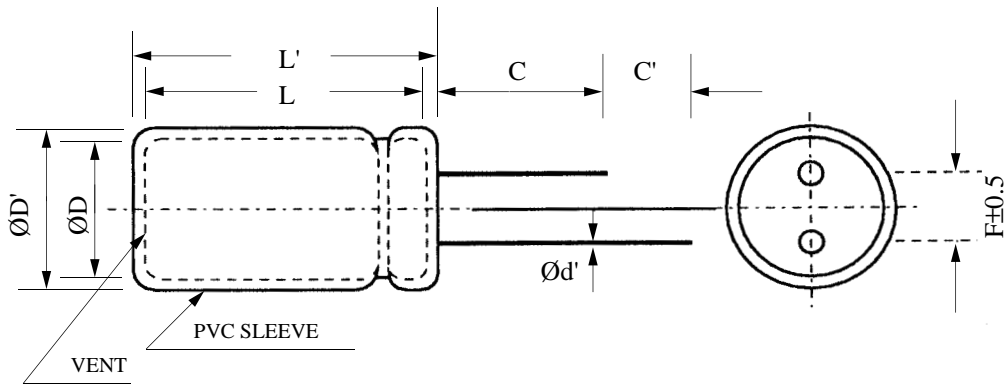

| PART NUMBERING SYSTEM | | | | | | | | | | | |
|-----------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|-----------------------------|----------|---|--------------------------|--------------------------|--------------------------|
| B | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | - | 2 | R | 5 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Series Code | Dimensions (mm) | | | | | Voltage (V) R is decimal | | Capacitance | | | |
| B = High Capacitance | Diameter | Length | | | | 2R5 = 2.5V | | Value | Multiplier | | |
| | | | | | | | | Example: 475 = 47 x 10 ⁵ μ F or 4.7 F | | | |

PACKAGING INFORMATION

Standard packaging: Bulk, 100 units per package.

Special packaging available upon request. Contact factory.

PART MARKING

- Manufacturer
- Capacitance (F)
- Max. Operating Voltage (V)
- Series Code (or part number)
- Polarity Marking

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.