


Capacitor, tantalum, 0.15 uF, +/-10% Tol, 35V@85C, Lead Spacing=3.18 mm

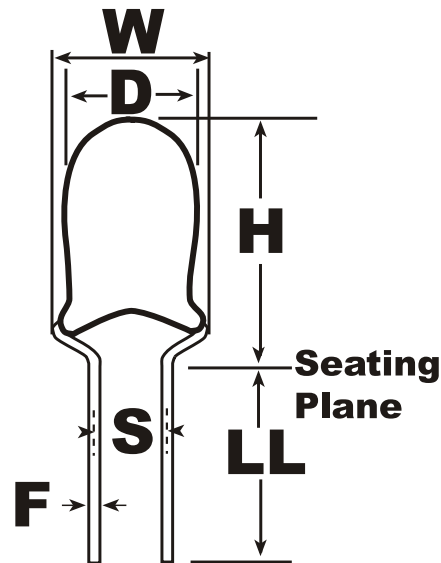

**Dimensions (mm)**

**Specifications**

Dimensions (mm)			Specifications	
<b>ID</b>	<b>Dimension</b>	<b>Tolerance</b>	<b>Manufacturer:</b>	KEMET
D	4.5	+0	<b>Value:</b>	0.15 uF
W	6.35	+/-0.64	<b>Voltage DC @ 85C:</b>	35V
H	8.6	+0	<b>Voltage DC @ 125C:</b>	23V
S	3.18	+/-0.38	<b>Tolerance:</b>	+/-10%
LL	4.75	+/-0.81	<b>Body Type:</b>	Radial Conformal ('dipped')
			<b>Temperature Range:</b>	-55/+125C
			<b>Application:</b>	General Purpose
			<b>Termination Type:</b>	Tin-Lead (SnPb)
			<b>Leakage Current:</b>	0.5 uA
			<b>Dissipation Factor:</b>	3%
			<b>Package Kind:</b>	Bulk
			<b>Package Type:</b>	Bag