

## Super Tan<sup>®</sup> Wet Tantalum Capacitors with Hermetic Seal



Vishay ST represents a major breakthrough in wet tantalum capacitor technology. Its unique cathode system provides the highest capacitance per unit volume. The design facilitates a doubling of capacitance, lower ESR and higher ripple current rating compared with conventional wet tantalum products. Moreover, the ST has the capacitance stability of a solid tantalum capacitor and there are no circuit impedance restrictions.

The ST is housed in an all tantalum, hermetically sealed case and is manufactured to withstand hazardous environments. The ST is used widely in the defense and aerospace industries and whenever there is a space problem

### FEATURES

- Terminations: Standard tin/lead (Sn/Pb) 100 % tin (RoHS compliant) available terminations:
- Very High Capacitance
- 10 to 1800  $\mu\text{F}$
- 25 to 125 VDC
- - 55 °C to + 125 °C
- Very Low ESR
- High Ripple Current
- All Tantalum Case
- Hermetically Sealed
- Low DCL
- Compliant to RoHS Directive 2002/95/EC




**RoHS\***  
COMPLIANT

### APPLICATION NOTES

- No continuous reverse voltage permissible.
- The peak of the applied AC ripple and the applied DC voltage must not exceed the DC voltage rating of the capacitor.
- Ripple current ratings by part number at 85 °C and 40 kHz are included in the table. Ripple current correction factors for other temperatures and frequencies are given on the next page.
- Transient reverse voltage surges are acceptable under the following conditions:  
The peak reverse voltage does not exceed 1.5 V and the peak current times the duration of the reverse transient does not exceed 0.05 ampere seconds. In addition, the repetition frequency of the reverse voltage surge is less than 10 Hz.

### DIMENSIONS in inches [millimeters]

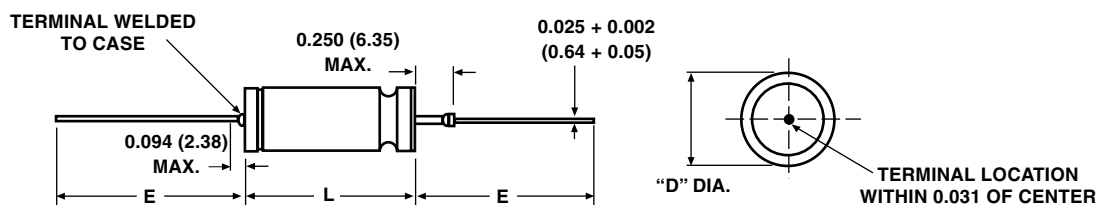

CASE CODE	D MAX. INSULATED	D ± 0.016 (0.41)	L + 0.031 (0.79) UNINSULATED	E ± 0.250 (6.35) MAX.
T1	0.219 (5.56)	0.188 (4.78)	0.453 (11.51)	1.500 (38.10)
T2	0.312 (7.92)	0.281 (7.14)	0.641 (16.28)	2.250 (57.15)
L2	0.312 (7.92)	0.281 (7.14)	1.008 (25.60)	2.250 (57.15)
T3	0.406 (10.31)	0.375 (9.52)	0.766 (19.46)	2.250 (57.15)
T4	0.406 (10.31)	0.375 (9.52)	1.062 (26.97)	2.250 (57.15)

#### Notes

1. Material at egress is tantalum
2. Insulation sleeving will lap over the ends of the capacitor case.
3. Tinned nickel leads, solderable and weldable

#### Approx. Weight

T1: 2.3 g, T2: 5.7 g  
T3: 9.4 g, T4: 14.8 g

\* Pb containing terminations are not RoHS compliant, exemptions may apply



Super Tan® Wet Tantalum Capacitors  
with Hermetic Seal

ORDERING INFORMATION						
ST	220	100	T4	M	I	E3
SUPERTAN COMMERCIAL CAP. TYPE	CAPACITANCE μF	85 °C RATED DC VOLTAGE	CASE CODE	CAPACITANCE TOLERANCE	INSULATING SLEEVE	RoHS COMPLIANT
				M = ± 20 % K = ± 10 %	I = Insulated X = Uninsulated	E3 = 100 % tin termination (RoHS compliant) Blank = SnPb termination (standard design)

STANDARD RATINGS										
CAP. AT 25 °C and 120 Hz (μF)	CASE CODE	MAX. ESR Ω 120 Hz	MAX. DCL μA		MAX. IMP. AT - 55 °C and 120 Hz (Ω)	MAXIMUM CAPACITANCE CHANGE %			AC RIPPLE 85 °C 40 kHz mA rms	PART NUMBER
			25 °C	85 °C and 125 °C		- 55 °C	85 °C	125 °C		
25 VDC at 85 °C					15 VDC at 125 °C					
120	T1	1.3	1	5	25	- 42	+ 8	+ 12	1250	ST120-25T1MI
560	T2	0.83	2	10	12	- 65	+ 10	+ 15	2100	ST560-25T2MI
1100	L2	0.5	3	25	7	- 60	+ 20	+ 45	3200	ST1100-25L2MI
1200	T3	0.65	5	20	7	- 70	+ 12	+ 18	2600	ST1200-25T3MI
1800	T4	0.5	6	25	7	- 72	+ 12	+ 20	3100	ST1800-25T4MI
30 VDC at 85 °C					20 VDC at 125 °C					
100	T1	1.3	1	5	25	- 38	+ 8	+ 12	1200	ST100-30TMI
470	T2	0.85	2	10	15	- 65	+ 10	+ 18	1800	ST470-30T2MI
950	L2	0.5	5	30	7	- 55	+ 18	+ 35	3200	ST950-30L2MI
1000	T3	0.7	7	25	7	- 70	+ 10	+ 18	2500	ST1000-30T3MI
1500	T4	0.6	12	35	6	- 72	+ 10	+ 20	3000	ST1500-30T4MI
50 VDC at 85 °C					30 VDC at 125 °C					
68	T1	1.5	1	5	35	- 25	+ 8	+ 15	1050	ST68-50T1MI
220	T2	0.9	2	10	17.5	- 50	+ 8	+ 15	1800	ST220-50T2MI
450	L2	0.6	3	25	7.5	- 45	+ 12	+ 30	2900	ST450-50L2MI
470	T3	0.75	3	25	10	- 45	+ 8	+ 15	2100	ST470-50T3MI
680	T4	0.7	5	40	8	- 58	+ 10	+ 20	2750	ST680-50T4MI
60 VDC at 85 °C					40 VDC at 125 °C					
47	T1	2.0	1	5	44	- 25	+ 8	+ 12	1050	ST47-60T1MI
150	T2	1.1	2	10	20	- 40	+ 8	+ 15	1800	ST150-60T2MI
370	L2	0.6	3	25	9	- 33	+ 9	+ 20	2900	ST370-60L2MI
390	T3	0.9	3	25	15	- 45	+ 8	+ 15	2100	ST390-60T3MI
560	T4	0.8	5	40	10	- 58	+ 8	+ 15	2750	ST560-60T4MI
75 VDC at 85 °C					50 VDC at 125 °C					
33	T1	2.5	1	5	66	- 25	+ 5	+ 9	1050	ST33-75T1MI
110	T2	1.3	2	10	24	- 35	+ 6	+ 10	1650	ST110-75T2MI
250	L2	0.8	5	30	12	- 30	+ 6	+ 15	2500	ST250-75L2MI
330	T3	1.0	3	30	12	- 45	+ 6	+ 10	2100	ST330-75T3MI
470	T4	0.9	5	50	12	- 50	+ 6	+ 10	2750	ST470-75T4MI

Notes

- (K = ± 10 %, M = ± 20 %) and insulation letter (I =Insulation, X = Uninsulated)
- Part Numbers shown are for units with ± 20 % capacitance tolerance and uninsulated capacitors. For ± 10 units, change the digit following the letter "X" from "0" to "9". For units with outer plastic-film insulation, substitute "2" for "0" at the end of the Part Number.
- For RoHS compliant add "E3" for suffix.

STANDARD RATINGS										
CAP. AT 25 °C and 120 Hz (µF)	CASE CODE	MAX. ESR Ω 120 Hz	MAX. DCL µA		MAX. IMP. AT - 55 °C and 120 Hz (Ω)	MAXIMUM CAPACITANCE CHANGE %			AC RIPPLE 85 °C 40 kHz mA rms	PART NUMBER
			25 °C	85 °C and 125 °C		- 55 °C	85 °C	125 °C		
100 VDC at 85 °C					65 VDC at 125 °C					
15	T1	3.5	1	5	125	- 18	+ 3	+ 10	1050	ST15-100T1MI
68	T2	2.1	2	10	37	- 30	+ 4	+ 12	1650	ST68-100T2MI
120	L2	1.0	3	25	20.5	- 30	+ 4	+ 12	2200	ST120-100L2MI
150	T3	1.6	3	25	22	- 35	+ 6	+ 12	2100	ST150-100T3MI
220	T4	1.2	5	50	15	- 40	+ 6	+ 12	2750	ST220-100T4MI
125 VDC at 85 °C					85 VDC at 125 °C					
10	T1	5.5	1	5	175	- 15	+ 3	+ 10	1050	ST10-125T1MI
47	T2	2.3	2	10	47	- 25	+ 5	+ 12	1650	ST47-125T2MI
90	L2	1.3	5	25	25	- 22	+ 4	+ 15	2000	ST90-125L2MI
100	T3	1.8	3	25	35	- 35	+ 5	+ 12	2100	ST100-125T3MI
150	T4	1.6	5	50	20	- 35	+ 6	+ 12	2750	ST150-125T4MI

**Notes**

- (K = ± 10 %, M = ± 20 %) and insulation letter (I =Insulation, X = Uninsulated)
- Part Numbers shown are for units with ± 20 % capacitance tolerance and uninsulated capacitors. For ± 10 units, change the digit following the letter "X" from "0" to "9". For units with outer plastic-film insulation, substitute "2" for "0" at the end of the Part Number.
- For RoHS compliant add "E3" for suffix.

RIPPLE CURRENT MULTIPLIERS VS. FREQUENCY, TEMPERATURE AND APPLIES PEAK VOLTAGE																									
FREQUENCY OF APPLIED RIPPLE CURRENT		120 Hz				800 Hz				1 kHz				10 kHz				40 kHz				100 kHz			
AMBIENT STILL AIR TEMP. IN °C		≤ 55	85	105	125	≤ 55	85	105	125	≤ 55	85	105	125	≤ 55	85	105	125	≤ 55	85	105	125	≤ 55	85	105	125
% of 85 °C rated peak voltage	100 %	0.60	0.39	-	-	0.71	0.43	-	-	0.72	0.46	-	-	0.88	0.55	-	-	1.0	0.63	-	-	1.1	0.69	-	-
	90 %	0.60	0.46	-	-	0.71	0.55	-	-	0.72	0.55	-	-	0.88	0.67	-	-	1.0	0.77	-	-	1.1	0.85	-	-
	80 %	0.60	0.52	0.35	-	0.71	0.62	0.42	-	0.72	0.62	0.42	-	0.88	0.76	0.52	-	1.0	0.87	0.59	-	1.1	0.96	0.65	-
	70 %	0.60	0.58	0.44	-	0.71	0.69	0.52	-	0.72	0.70	0.52	-	0.88	0.85	0.64	-	1.0	0.97	0.73	-	1.1	1.07	0.80	-
	66 2/3 %	0.60	0.60	0.46	0.27	0.71	0.71	0.55	0.32	0.72	0.72	0.55	0.32	0.88	0.88	0.68	0.40	1.0	1.0	0.77	0.45	1.1	1.1	0.85	0.50



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.