


## Wet Tantalum Capacitors Tantalum-Case with Glass-to-Tantalum Hermetic Seal for - 55 °C to + 200 °C Operation



### FEATURES

- Terminations: standard tin/lead (SnPb), 100 % tin (RoHS compliant) available
- Standard and extended ratings
- Model 135D tantalum-case electrolytic capacitors incorporate the advantages of all the varieties of electrolytic capacitors and eliminate most of the disadvantages. These units have a 3 V reverse voltage capability at + 85 °C and a higher ripple current capability than any other electrolytic type with similar combinations of capacitance and case size.
- Designed for the aerospace applications, this capacitor was developed under partial sponsorship of the Marshall Space Flight Center, National Aeronautics and Space Administration. The capacitors have a high resistance to damage from shock and vibration. Extended range ratings and high temperature designs are available.
- Model 135D capacitors are commercial equivalents of Tansitor Style; AQ, AR, HAQ, HAR, Mallory-NACC Style; TLT, TXT, THT, THX and Military Style CLR79 and CLR81, designed to meet the performance requirements of Military Specification MIL-PRF-39006/22/25. Capacitors to meet MIL-PRF-39006/22/25 should be ordered by part numbers shown in that specification.
- Compliant to RoHS directive 2002/95/EC

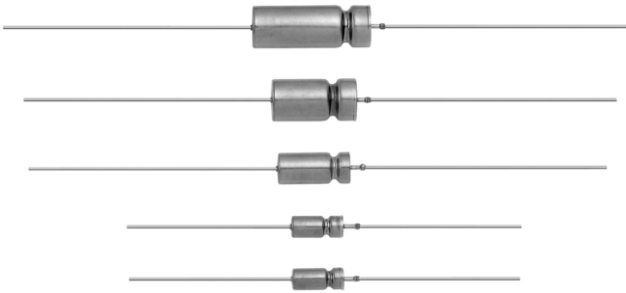

**RoHS\***  
COMPLIANT

### PERFORMANCE CHARACTERISTICS

**Operating Temperature:** - 55 °C to + 85 °C  
(To + 200 °C with voltage derating)

**Capacitance Tolerance:** At 120 Hz, + 25 °C. ± 20 % standard. ± 10 %, ± 5 % available as special.

**DC Leakage Current (DCL Max.):** At + 25 °C and above: Leakage current shall not exceed the values listed in the Standard Ratings Tables.

**Life Test:** Capacitors are capable of withstanding a 2000 h life test at a temperature of + 85 °C or + 125 °C at the applicable rated DC working voltage.

Following life test:

1. DCL, measured at + 85 °C rated voltage, shall not be in excess of the original requirement.
2. The equivalent series resistance shall not exceed 150 % of the initial requirement.
3. Change in capacitance shall not exceed 10 % from the initial measurement.

ORDERING INFORMATION						
135D	306	X0	006	C	2	E3
MODEL	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	CASE CODE	STYLE NUMBER	RoHS COMPLIANT
	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow	X0 = ± 20 % X9 = ± 10 % X5 = ± 5 %	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V)	See Ratings and Case Codes Table	Std. temperature (max. + 125 °C) 0 = No insulating sleeve 2 = Polyester insulation sleeve 3 = High temperature film insulation  High temperature (max. + 200 °C) 6 = High temperature film insulation 8 = No insulating sleeve	E3 = 100 % tin termination (RoHS compliant design) Blank = SnPb termination (standard design)

#### Note

**Packaging:** The use of formed plastic trays for packaging these axial lead components is standard. Tape and reel is not recommended due to the unit weight.

\* Pb containing terminations are not RoHS compliant, exemptions may apply

**Wet Tantalum Capacitors Tantalum-Case with Glass-to-Tantalum  
Hermetic Seal for - 55 °C to + 200 °C Operation**

<b>DIMENSIONS</b> in inches [millimeters]						
CASE CODE		D	L <sub>1</sub>	L <sub>2</sub> (Max.)	E	WEIGHT (g) (Max.)
TYPE	DCLR 79/81 EQUIV.					
135D						
C	T1	0.188 ± 0.016 [4.78 ± 0.41]	0.453 + 0.031 - 0.016 [11.51 + 0.79 - 0.41]	0.734 [18.64]	1.500 ± 0.250 [38.10 ± 6.35]	2.6
F	T2	0.281 ± 0.016 [7.14 ± 0.41]	0.641 + 0.031 - 0.016 [16.28 + 0.79 - 0.41]	0.922 [23.42]	2.250 ± 0.250 [57.15 ± 6.35]	6.2
T	T3	0.375 ± 0.016 [9.53 ± 0.41]	0.766 + 0.031 - 0.016 [19.46 + 0.79 - 0.41]	1.047 [26.59]	2.250 ± 0.250 [57.15 ± 6.35]	11.6
K	T4	0.375 ± 0.016 [9.53 ± 0.41]	1.062 + 0.031 - 0.016 [26.97 + 0.79 - 0.41]	1.343 [34.11]	2.250 ± 0.250 [57.15 ± 6.35]	17.7

**Note**

- For insulated parts, add 0.015" [0.38] to the diameter. The insulation shall lap over the ends of the capacitor body.

<b>STANDARD RATINGS</b>										
CAPACITANCE (µF)	CASE CODE	PART NUMBER (1)	MAX. ESR	MAX. IMP.	MAX. DCL (µA)		MAX. CAPACITANCE CHANGE (%) at			MAX. RIPPLE 40 kHz I <sub>rms</sub>
			at + 25 °C 120 Hz	at - 55 °C 120 Hz	at + 25 °C	at + 85 °C + 125 °C	- 55 °C	+ 85 °C	+ 125 °C	
<b>6 WVDC at + 85 °C ... 4 WVDC at + 125 °C ... 3.6 WVDC at + 200 °C</b>										
30	C	135D306X0006C2	4.0	100	1.0	2.0	- 40	+ 10.5	+ 12	820
68	C	135D686X0006C2	3.2	60	1.0	2.0	- 40	+ 14	+ 16	960
140	F	135D147X0006F2	2.0	40	1.0	3.0	- 40	+ 14	+ 16	1200
270	F	135D277X0006F2	2.2	25	1.0	6.5	- 44	+ 17.5	+ 20	1375
330	T	135D337X0006T2	1.4	20	2.0	7.9	- 44	+ 14	+ 16	1800
560	T	135D567X0006T2	1.3	25	2.0	13.0	- 64	+ 17.5	+ 20	1900
1200	K	135D128X0006K2	1.0	20	3.0	14.0	- 80	+ 25	+ 25	2265
<b>8 WVDC at + 85 °C ... 5 WVDC at + 125 °C ... 4.8 WVDC at + 200 °C</b>										
25	C	135D256X0008C2	4.0	100	1.0	2.0	- 40	+ 10.5	+ 12	820
56	C	135D566X0008C2	3.3	59	1.0	2.0	- 40	+ 14	+ 16	900
120	F	135D127X0008F2	2.6	50	1.0	2.0	- 44	+ 17.5	+ 20	1230
220	F	135D227X0008F2	2.4	30	1.0	7.0	- 44	+ 17.5	+ 20	1370
290	T	135D297X0008T2	1.8	25	2.0	6.0	- 64	+ 17.5	+ 20	1770
430	T	135D437X0008T2	1.4	25	2.0	14.0	- 64	+ 17.5	+ 20	1825
850	K	135D857X0008K2	1.0	22	4.0	16.0	- 80	+ 25	+ 25	2330
<b>10 WVDC at + 85 °C ... 7 WVDC at + 125 °C ... 6 WVDC at + 200 °C</b>										
20	C	135D206X0010C2	4.0	120	1.0	2.0	- 32	+ 10.5	+ 12	820
47	C	135D476X0010C2	3.7	90	1.0	2.0	- 36	+ 14	+ 16	855
100	F	135D107X0010F2	2.4	60	1.0	4.0	- 36	+ 14	+ 16	1200
180	F	135D187X0010F2	2.2	40	1.0	7.0	- 36	+ 14	+ 16	1365
250	T	135D257X0010T2	1.8	30	2.0	10.0	- 40	+ 14	+ 16	1720
390	T	135D397X0010T2	1.5	25	2.0	16.0	- 64	+ 17.5	+ 20	1800
750	K	135D757X0010K2	1.0	23	4.0	16.0	- 80	+ 25	+ 25	2360
<b>15 WVDC at + 85 °C ... 10 WVDC at + 125 °C ... 9 WVDC at + 200 °C</b>										
15	C	135D156X0015C2	4.4	155	1.0	2.0	- 24	+ 10.5	+ 12	780
33	C	135D336X0015C2	4.0	90	1.0	2.0	- 28	+ 14	+ 16	820
70	F	135D706X0015F2	2.8	75	1.0	4.0	- 28	+ 14	+ 16	1150
120	F	135D127X0015F2	2.6	50	1.0	7.0	- 28	+ 17.5	+ 20	1450
170	T	135D177X0015T2	2.4	35	2.0	10.0	- 32	+ 14	+ 16	1480
270	T	135D277X0015T2	2.2	30	2.0	16.0	- 56	+ 17.5	+ 20	1740
540	K	135D547X0015K2	1.0	23	6.0	24.0	- 80	+ 25	+ 25	2330

**Note**

- (1) Part Numbers are for units with ± 20 % capacitance tolerance, standard + 125 °C maximum temperature, standard polyesterfilm insulation, and tin-lead terminations. For other capacitance tolerances, other maximum temperatures, insulation and termination options, please consult ORDERING INFORMATION on page 1 for proper part number.

STANDARD RATINGS												
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER <sup>(1)</sup>	MAX. ESR		MAX. IMP.		MAX. DCL ( $\mu$ A)		MAX. CAPACITANCE CHANGE (%) at			MAX. RIPPLE 40 kHz rms
			at + 25 °C 120 Hz	at - 55 °C 120 Hz	at + 25 °C	at + 85 °C + 125 °C	at - 55 °C	at + 85 °C	at + 125 °C			
<b>25 WVDC at + 85 °C ... 15 WVDC at + 125 °C ... 12 WVDC at + 200 °C</b>												
10	C	135D106X0025C2	5.3	220	1.0	2.0	- 16	+ 8	+ 9	715		
22	C	135D226X0025C2	4.2	140	1.0	2.0	- 20	+ 10.5	+ 12	800		
50	F	135D506X0025F2	3.0	70	1.0	2.0	- 28	+ 13	+ 15	1130		
100	F	135D107X0025F2	2.8	50	1.0	10.0	- 28	+ 13	+ 15	1435		
120	T	135D127X0025T2	2.6	38	2.0	6.0	- 32	+ 13	+ 15	1450		
180	T	135D187X0025T2	2.2	32	2.0	18.0	- 48	+ 13	+ 15	1525		
350	K	135D357X0025K2	1.3	24	7.0	28.0	- 70	+ 25	+ 25	1970		
<b>30 WVDC at + 85 °C ... 20 WVDC at + 125 °C ... 18 WVDC at + 200 °C</b>												
8	C	135D805X0030C2	6.6	275	1.0	2.0	- 16	+ 8	+ 12	640		
15	C	135D156X0030C2	6.2	175	1.0	2.0	- 20	+ 10.5	+ 12	780		
22	F	135D226X0030F2	4.6	95	1.0	5.0	- 20	+ 10.5	+ 12	1005		
40	F	135D406X0030F2	4.0	65	1.0	5.0	- 24	+ 10.5	+ 12	1120		
68	F	135D686X0030F2	2.9	60	1.0	8.0	- 24	+ 13	+ 15	1285		
100	T	135D107X0030T2	2.7	40	2.0	12.0	- 28	+ 10.5	+ 12	1450		
150	T	135D157X0030T2	2.3	35	2.0	18.0	- 48	+ 13	+ 15	1525		
300	K	135D307X0030K2	1.4	25	8.0	32.0	- 60	+ 25	+ 25	1950		
<b>35 WVDC at + 85 °C ... 22 WVDC at + 125 °C ... 21 WVDC at + 200 °C</b>												
15	C	135D156X0035C2	6.2	175	0.75	1.5	- 20	+ 10.5	+ 12	660		
68	F	135D686X0035F2	2.9	60	1.0	2.0	- 24	+ 13	+ 15	1195		
270	K	135D277X0035K2	1.4	26	3.0	12.0	- 58	+ 25	+ 25	1950		
<b>50 WVDC at + 85 °C ... 30 WVDC at + 125 °C ... 30 WVDC at + 200 °C</b>												
5	C	135D505X0050C2	8.0	400	1.0	2.0	- 16	+ 5	+ 6	580		
10	C	135D106X0050C2	6.4	250	1.0	2.0	- 24	+ 8	+ 9	715		
25	F	135D256X0050F2	4.6	95	1.0	5.0	- 20	+ 10.5	+ 12	1005		
47	F	135D476X0050F2	3.7	70	1.0	9.0	- 28	+ 13	+ 15	1155		
60	T	135D606X0050T2	2.9	45	2.0	12.0	- 16	+ 10.5	+ 12	1335		
82	T	135D826X0050T2	2.5	45	2.0	16.0	- 32	+ 13	+ 15	1400		
160	K	135D167X0050K2	1.5	27	8.0	32.0	- 50	+ 25	+ 25	1900		
<b>60 WVDC at + 85 °C ... 40 WVDC at + 125 °C ... 36 WVDC at + 200 °C</b>												
4	C	135D405X0060C2	9.3	550	1.0	2.0	- 16	+ 5	+ 6	525		
8.2	C	135D825X0060C2	6.6	275	1.0	2.0	- 24	+ 8	+ 9	625		
20	F	135D206X0060F2	4.7	105	1.0	5.0	- 16	+ 8	+ 9	930		
39	F	135D396X0060F2	3.4	90	1.0	9.0	- 28	+ 10.5	+ 15	1110		
50	T	135D506X0060T2	2.9	50	2.0	12.0	- 16	+ 10.5	+ 12	1330		
68	T	135D686X0060T2	2.5	50	2.0	16.0	- 32	+ 10.5	+ 15	1365		
140	K	135D147X0060K2	1.5	28	8.0	32.0	- 40	+ 20	+ 20	1850		
<b>75 WVDC at + 85 °C ... 50 WVDC at + 125 °C ... 45 WVDC at + 200 °C</b>												
3.5	C	135D355X0075C2	9.5	650	1.0	2.0	- 16	+ 5	+ 6	525		
6.8	C	135D685X0075C2	6.8	300	1.0	2.0	- 20	+ 8	+ 9	610		
15	F	135D156X0075F2	5.3	150	1.0	5.0	- 16	+ 8	+ 9	890		
33	F	135D336X0075F2	4.2	90	1.0	10.0	- 24	+ 10.5	+ 15	1000		
40	T	135D406X0075T2	3.0	60	2.0	12.0	- 16	+ 10.5	+ 12	1250		
56	T	135D566X0075T2	2.6	60	2.0	17.0	- 28	+ 10.5	+ 15	1335		
110	K	135D117X0075K2	1.5	29	9.0	36.0	- 35	+ 20	+ 20	1850		

**Note**

<sup>(1)</sup> Part Numbers are for units with  $\pm 20\%$  capacitance tolerance, standard + 125 °C maximum temperature, standard polyesterfilm insulation, and tin-lead terminations. For other capacitance tolerances, other maximum temperatures, insulation and termination options, please consult ORDERING INFORMATION on page 1 for proper part number.



Wet Tantalum Capacitors Tantalum-Case with Glass-to-Tantalum  
Hermetic Seal for - 55 °C to + 200 °C Operation

STANDARD RATINGS												
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER <sup>(1)</sup>	MAX. ESR		MAX. IMP.		MAX. DCL ( $\mu$ A)		MAX. CAPACITANCE CHANGE (%) at			MAX. RIPPLE 40 kHz rms
			at + 25 °C 120 Hz	at - 55 °C 120 Hz	at + 25 °C	at + 85 °C + 125 °C	at + 25 °C	at + 85 °C + 125 °C	- 55 °C	+ 85 °C	+ 125 °C	
<b>100 WVDC at + 85 °C . . . 65 WVDC at + 125 °C . . . 60 WVDC at + 200 °C</b>												
2.5	C	135D255X0100C2	10.6	950	1.0	2.0	- 16	+ 7	+ 8	505		
4.7	C	135D475X0100C2	8.5	500	1.0	2.0	- 16	+ 7	+ 8	565		
11	F	135D116X0100F2	6.0	200	1.0	4.0	- 16	+ 7	+ 8	835		
22	F	135D226X0100F2	4.8	100	1.0	9.0	- 16	+ 7	+ 8	965		
30	T	135D306X0100T2	3.3	80	2.0	12.0	- 16	+ 7	+ 8	1240		
43	T	135D436X0100T2	2.6	70	2.0	17.0	- 20	+ 7	+ 8	1335		
82	K	135D826X0100K2	1.6	39	3.0	24	- 24	+ 18	+ 18	1860		
86	K	135D866X0100K2	1.6	30	9.0	36.0	- 25	+ 15	+ 15	1800		
<b>125 WVDC at + 85 °C . . . 85 WVDC at + 125 °C . . . 75 WVDC at + 200 °C</b>												
1.7	C	135D175X0125C2	15.6	1250	1.0	2.0	- 16	+ 7	+ 8	415		
3.6	C	135D365X0125C2	10.0	600	1.0	2.0	- 16	+ 7	+ 8	520		
9	F	135D905X0125F2	7.4	240	1.0	5.0	- 16	+ 7	+ 8	755		
14	F	135D146X0125F2	5.7	167	1.0	7.0	- 16	+ 7	+ 8	860		
18	T	135D186X0125T2	3.7	129	2.0	9.0	- 16	+ 7	+ 8	1130		
25	T	135D256X0125T2	3.2	93	2.0	13.0	- 16	+ 7	+ 8	1200		
56	K	135D566X0125K2	1.6	32	10.0	40.0	- 25	+ 15	+ 15	1800		

**Note**

<sup>(1)</sup> Part Numbers are for units with  $\pm$  20 % capacitance tolerance, standard + 125 °C maximum temperature, standard polyesterfilm insulation, and tin-lead terminations. For other capacitance tolerances, other maximum temperatures, insulation and termination options, please consult ORDERING INFORMATION on page 1 for proper part number.

EXTENDED RATINGS												
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER <sup>(1)</sup>	MAX. ESR		MAX. IMP.		MAX. DCL ( $\mu$ A)		MAX. CAPACITANCE CHANGE (%) at			MAX. RIPPLE 40 kHz rms
			at + 25 °C 120 Hz	at - 55 °C 120 Hz	at + 25 °C	at + 85 °C + 125 °C	at + 25 °C	at + 85 °C + 125 °C	- 55 °C	+ 85 °C	+ 125 °C	
<b>6 WVDC at + 85 °C . . . 4 WVDC at + 125 °C . . . 3.6 WVDC at + 200 °C</b>												
220	C	135D227X0006C2	3.0	36	2	9	- 64	+ 13	+ 16	1000		
560	F	135D567X0006F2	2.5	21	3	9	- 77	+ 16	+ 20	1500		
820	F	135D827X0006F2	2.5	18	3	14	- 88	+ 16	+ 20	1500		
1200	T	135D128X0006T2	1.5	18	5	18	- 88	+ 20	+ 25	1900		
1500	T	135D158X0006T2	1.5	18	5	20	- 90	+ 20	+ 25	1900		
2200	K	135D228X0006K2	1.0	13	6	24	- 90	+ 25	+ 30	2300		
<b>8 WVDC at + 85 °C . . . 5 WVDC at + 125 °C . . . 4.8 WVDC at + 200 °C</b>												
180	C	135D187X0008C2	3.0	45	2	9	- 60	+ 13	+ 16	1000		
680	F	135D687X0008F2	2.5	22	3	14	- 83	+ 16	+ 20	1500		
1500	T	135D158X0008T2	1.5	18	5	20	- 90	+ 20	+ 25	1900		
1800	K	135D188X0008K2	1.0	14	7	25	- 90	+ 25	+ 30	2300		
<b>10 WVDC at + 85 °C . . . 7 WVDC at + 125 °C . . . 6 WVDC at + 200 °C</b>												
120	C	135D127X0010C2	3.2	54	2	6	- 40	+ 14	+ 16	900		
150	C	135D157X0010C2	3.0	54	2	9	- 55	+ 13	+ 16	900		
390	F	135D397X0010F2	2.5	27	3	9	- 66	+ 16	+ 20	1450		
560	F	135D567X0010F2	2.5	27	3	16	- 77	+ 16	+ 20	1450		
1200	T	135D128X0010T2	1.5	18	5	20	- 88	+ 20	+ 25	1850		
1500	K	135D158X0010K2	1.0	15	7	25	- 88	+ 25	+ 30	2300		

**Note**

<sup>(1)</sup> Part Numbers are for units with  $\pm$  20 % capacitance tolerance, standard + 125 °C maximum temperature, standard polyesterfilm insulation, and tin-lead terminations. For other capacitance tolerances, other maximum temperatures, insulation and termination options, please consult ORDERING INFORMATION on page 1 for proper part number.

EXTENDED RATINGS										
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER (1)	MAX. ESR	MAX. IMP.	MAX. DCL ( $\mu$ A)		MAX. CAPACITANCE CHANGE (%) at			MAX. RIPPLE 40 kHz rms
			at + 25 °C 120 Hz	at - 55 °C 120 Hz	at + 25 °C	at + 85 °C + 125 °C	- 55 °C	+ 85 °C	+ 125 °C	
<b>15 WVDC at + 85 °C ... 10 WVDC at + 125 °C ... 9 WVDC at + 200 °C</b>										
82	C	135D826X0015C2	3.9	72	2	6	- 35	+ 12	+ 16	900
100	C	135D107X0015C2	3.9	72	2	9	- 44	+ 13	+ 16	900
270	F	135D277X0015F2	2.5	31	3	9	- 62	+ 16	+ 15	1450
390	F	135D397X0015F2	2.5	31	3	16	- 66	+ 16	+ 20	1450
680	T	135D687X0015T2	1.8	22	6	18	- 74	+ 20	+ 25	1800
820	T	135D827X0015T2	1.8	22	6	24	- 77	+ 20	+ 25	1800
1000	K	135D108X0015K2	1.2	17	8	32	- 77	+ 25	+ 30	2330
<b>25 WVDC at + 85 °C ... 15 WVDC at + 125 °C ... 12 WVDC at + 200 °C</b>										
47	C	135D476X0025C2	5.2	100	2	6	- 23	+ 12	+ 15	800
56	C	135D566X0025C2	4.3	90	2	6	- 25	+ 12	+ 15	850
68	C	135D686X0025C2	4.3	90	2	9	- 40	+ 12	+ 15	850
180	F	135D187X0025F2	2.7	33	3	9	- 54	+ 13	+ 15	1400
270	F	135D277X0025F2	2.7	33	3	16	- 62	+ 13	+ 16	1400
390	T	135D397X0025T2	1.8	25	6	18	- 55	+ 18	+ 25	1500
470	T	135D477X0025T2	1.8	24	6	18	- 65	+ 18	+ 25	1750
560	T	135D567X0025T2	1.8	24	7	28	- 72	+ 20	+ 25	1750
680	K	135D687X0025K2	1.2	19	8	32	- 72	+ 25	+ 30	2100
<b>30 WVDC at + 85 °C ... 20 WVDC at + 125 °C ... 18 WVDC at + 200 °C</b>										
47	C	135D476X0030C2	5.2	100	2	6	- 23	+ 12	+ 15	800
56	C	135D566X0030C2	5.2	100	2	9	- 38	+ 12	+ 15	800
150	F	135D157X0030F2	2.5	36	3	9	- 42	+ 13	+ 15	1200
220	F	135D227X0030F2	2.5	36	3	16	- 60	+ 13	+ 16	1200
390	T	135D397X0030T2	1.8	25	6	18	- 55	+ 18	+ 25	1500
470	T	135D477X0030T2	1.8	25	8	32	- 65	+ 20	+ 25	1500
560	K	135D567X0030K2	1.3	20	9	36	- 65	+ 25	+ 30	2000
<b>35 WVDC at + 85 °C ... 22 WVDC at + 125 °C ... 21 WVDC at + 200 °C</b>										
39	C	135D396X0035C2	4.1	61	2	6	- 22	+ 12	+ 14	820
120	F	135D127X0035F2	2.5	31	3	10	- 40	+ 13	+ 15	1315
330	T	135D337X0035T2	1.8	20	6	18	- 50	+ 16	+ 25	1640
370	K	135D377X0035K2	1.3	15	9	36	- 60	+ 25	+ 30	2040
<b>40 WVDC at + 85 °C ... 25 WVDC at + 125 °C ... 20 WVDC at + 200 °C</b>										
39	C	135D396X0040C2	4.1	61	2	6	- 22	+ 12	+ 14	820
<b>50 WVDC at + 85 °C ... 30 WVDC at + 125 °C ... 30 WVDC at + 200 °C</b>										
33	C	135D336X0050C2	5.0	135	2	9	- 29	+ 10	+ 12	700
100	F	135D107X0050F2	2.8	49	4	12	- 36	+ 13	+ 15	1200
120	F	135D127X0050F2	2.5	49	4	24	- 42	+ 12	+ 15	1200
270	T	135D277X0050T2	2.0	30	8	32	- 46	+ 20	+ 25	1450
330	K	135D337X0050K2	1.5	30	9	36	- 46	+ 25	+ 30	1900
<b>60 WVDC at + 85 °C ... 40 WVDC at + 125 °C ... 36 WVDC at + 200 °C</b>										
18	C	135C186X0060C2	7.0	160	2	12	- 20	+ 7	+ 8	700
27	C	135D276X0060C2	5.0	144	3	12	- 24	+ 10	+ 12	700
82	F	135D826X0060F2	2.9	54	4	16	- 30	+ 15	+ 15	1100
100	F	135D107X0060F2	2.5	54	4	20	- 36	+ 12	+ 15	1100
220	T	135D227X0060T2	1.8	29	8	32	- 40	+ 16	+ 20	1400
270	K	135D277X0060K2	1.4	23	9	36	- 45	+ 20	+ 25	1850
330	K	135D337X0060K2	1.3	31	10	40	- 72	+ 25	+ 25	1850

**Note**

(1) Part Numbers are for units with  $\pm 20\%$  capacitance tolerance, standard + 125 °C maximum temperature, standard polyesterfilm insulation, and tin-lead terminations. For other capacitance tolerances, other maximum temperatures, insulation and termination options, please consult ORDERING INFORMATION on page 1 for proper part number.



Wet Tantalum Capacitors Tantalum-Case with Glass-to-Tantalum  
Hermetic Seal for - 55 °C to + 200 °C Operation

135D

Vishay

<b>EXTENDED RATINGS</b>										
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER <sup>(1)</sup>	MAX. ESR	MAX. IMP.	MAX. DCL ( $\mu$ A)		MAX. CAPACITANCE CHANGE (%) at			MAX. RIPPLE 40 kHz rms
			at + 25 °C 120 Hz	at - 55 °C 120 Hz	at + 25 °C	at + 85 °C + 125 °C	- 55 °C	+ 85 °C	+ 125 °C	
<b>63 WVDC at + 85 °C . . . 40 WVDC at + 125 °C . . . 31 WVDC at + 200 °C</b>										
10	C	135D106X0063C2	5.3	250	1.0	2.0	- 20	+ 8	+ 9	715
27	C	135D276X0063C2	5.0	144	3	12	- 24	+ 10	+ 12	700
100	F	135D107X0063F2	2.5	54	2	12	- 36	+ 12	+ 15	1100
<b>75 WVDC at + 85 °C . . . 50 WVDC at + 125 °C . . . 45 WVDC at + 200 °C</b>										
12	C	135D126X0075C2	5.1	157	3	12	- 19	+ 10	+ 12	600
22	C	135D226X0075C2	5.1	157	3	12	- 19	+ 10	+ 12	600
68	F	135D686X0075F2	3.0	63	4	16	- 25	+ 12	+ 15	1000
82	F	135D826X0075F2	2.5	63	4	24	- 30	+ 12	+ 15	1000
180	T	135D187X0075T2	2.2	30	9	36	- 35	+ 16	+ 20	1300
220	K	135D227X0075K2	1.8	24	10	40	- 40	+ 20	+ 25	1800
300	K	135D307X0075K2	1.8	32	12	48	- 60	+ 22	+ 22	2000
<b>100 WVDC at + 85 °C . . . 65 WVDC at + 125 °C . . . 60 WVDC at + 200 °C</b>										
10	C	135D106X0100C2	5.9	200	3	12	- 17	+ 10	+ 12	800
39	F	135D396X0100F2	3.5	80	5	24	- 20	+ 12	+ 15	1300
68	T	135D686X0100T2	2.2	40	10	40	- 30	+ 14	+ 16	1600
120	K	135D127X0100K2	2.7	30	12	48	- 35	+ 15	+ 17	2000
<b>125 WVDC at + 85 °C . . . 85 WVDC at + 125 °C . . . 75 WVDC at + 200 °C</b>										
6.8	C	135D685X0125C2	11.7	300	3	12	- 14	+ 10	+ 12	700
27	F	135D276X0125F2	3.5	90	5	24	- 18	+ 12	+ 15	1200
47	T	135D476X0125T2	2.2	50	10	40	- 26	+ 14	+ 16	1500
68	K	135D686X0125K2	2.2	32	11	44	- 28	+ 15	+ 16	1850
82	K	135D826X0125K2	2.8	32	12	48	- 30	+ 15	+ 17	1900

**Note**

<sup>(1)</sup> Part Numbers are for units with  $\pm$  20 % capacitance tolerance, standard + 125 °C maximum temperature, standard polyesterfilm insulation, and tin-lead terminations. For other capacitance tolerances, other maximum temperatures, insulation and termination options, please consult ORDERING INFORMATION on page 1 for proper part number.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.