

Super Tan[®] Wet Tantalum Capacitors with Hermetic Seal



Vishay ST represents a major breakthrough in wet tantalum capacitor technology. Its unique cathode system provides the highest capacitance per unit volume. The design facilitates a doubling of capacitance, lower ESR and higher ripple current rating compared with conventional wet tantalum products. Moreover, the ST has the capacitance stability of a solid tantalum capacitor and there are no circuit impedance restrictions.

The ST is housed in an all tantalum, hermetically sealed case and is manufactured to withstand hazardous environments. The ST is used widely in the defense and aerospace industries and whenever there is a space problem

FEATURES

- Terminations: Standard tin/lead (Sn/Pb) 100 % tin (RoHS compliant) available terminations:
- Very High Capacitance
- 10 to 1800 μF
- 25 to 125 VDC
- - 55 °C to + 125 °C
- Very Low ESR
- High Ripple Current
- All Tantalum Case
- Hermetically Sealed
- Low DCL
- Compliant to RoHS Directive 2002/95/EC




RoHS*
COMPLIANT

APPLICATION NOTES

- No continuous reverse voltage permissible.
- The peak of the applied AC ripple and the applied DC voltage must not exceed the DC voltage rating of the capacitor.
- Ripple current ratings by part number at 85 °C and 40 kHz are included in the table. Ripple current correction factors for other temperatures and frequencies are given on the next page.
- Transient reverse voltage surges are acceptable under the following conditions:
The peak reverse voltage does not exceed 1.5 V and the peak current times the duration of the reverse transient does not exceed 0.05 ampere seconds. In addition, the repetition frequency of the reverse voltage surge is less than 10 Hz.

DIMENSIONS in inches [millimeters]

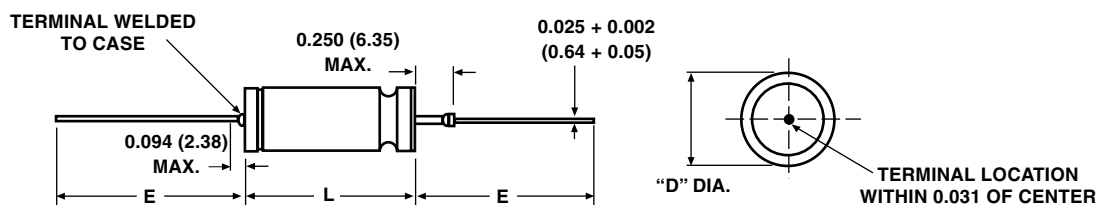

| CASE CODE | D MAX. INSULATED | D ± 0.016 (0.41) | L + 0.031 (0.79) UNINSULATED | E ± 0.250 (6.35) MAX. |
|-----------|------------------|------------------|------------------------------|-----------------------|
| T1 | 0.219 (5.56) | 0.188 (4.78) | 0.453 (11.51) | 1.500 (38.10) |
| T2 | 0.312 (7.92) | 0.281 (7.14) | 0.641 (16.28) | 2.250 (57.15) |
| L2 | 0.312 (7.92) | 0.281 (7.14) | 1.008 (25.60) | 2.250 (57.15) |
| T3 | 0.406 (10.31) | 0.375 (9.52) | 0.766 (19.46) | 2.250 (57.15) |
| T4 | 0.406 (10.31) | 0.375 (9.52) | 1.062 (26.97) | 2.250 (57.15) |

Notes

1. Material at egress is tantalum
2. Insulation sleeving will lap over the ends of the capacitor case.
3. Tinned nickel leads, solderable and weldable

Approx. Weight

T1: 2.3 g, T2: 5.7 g
T3: 9.4 g, T4: 14.8 g

* Pb containing terminations are not RoHS compliant, exemptions may apply



Super Tan® Wet Tantalum Capacitors
with Hermetic Seal

| ORDERING INFORMATION | | | | | | |
|-------------------------------------|-------------------|---------------------------|-----------|--------------------------|----------------------------------|-------------------------------------------------------------------------------------------------|
| ST | 220 | 100 | T4 | M | I | E3 |
| SUPERTAN COMMERCIAL CAP. TYPE | CAPACITANCE μF | 85 °C RATED DC VOLTAGE | CASE CODE | CAPACITANCE TOLERANCE | INSULATING SLEEVE | RoHS COMPLIANT |
| | | | | M = ± 20 % K = ± 10 % | I = Insulated X = Uninsulated | E3 = 100 % tin termination (RoHS compliant) Blank = SnPb termination (standard design) |

| STANDARD RATINGS | | | | | | | | | | |
|-------------------------------------------|--------------|----------------------------|-------------|------------------------|-------------------------------------------------|---------------------------------|-------|--------|-------------------------------------------|---------------|
| CAP. AT 25 °C and 120 Hz (μF) | CASE CODE | MAX. ESR Ω 120 Hz | MAX. DCL μA | | MAX. IMP. AT - 55 °C and 120 Hz (Ω) | MAXIMUM CAPACITANCE CHANGE % | | | AC RIPPLE 85 °C 40 kHz mA rms | PART NUMBER |
| | | | 25 °C | 85 °C and 125 °C | | - 55 °C | 85 °C | 125 °C | | |
| 25 VDC at 85 °C | | | | | 15 VDC at 125 °C | | | | | |
| 120 | T1 | 1.3 | 1 | 5 | 25 | - 42 | + 8 | + 12 | 1250 | ST120-25T1MI |
| 560 | T2 | 0.83 | 2 | 10 | 12 | - 65 | + 10 | + 15 | 2100 | ST560-25T2MI |
| 1100 | L2 | 0.5 | 3 | 25 | 7 | - 60 | + 20 | + 45 | 3200 | ST1100-25L2MI |
| 1200 | T3 | 0.65 | 5 | 20 | 7 | - 70 | + 12 | + 18 | 2600 | ST1200-25T3MI |
| 1800 | T4 | 0.5 | 6 | 25 | 7 | - 72 | + 12 | + 20 | 3100 | ST1800-25T4MI |
| 30 VDC at 85 °C | | | | | 20 VDC at 125 °C | | | | | |
| 100 | T1 | 1.3 | 1 | 5 | 25 | - 38 | + 8 | + 12 | 1200 | ST100-30TMI |
| 470 | T2 | 0.85 | 2 | 10 | 15 | - 65 | + 10 | + 18 | 1800 | ST470-30T2MI |
| 950 | L2 | 0.5 | 5 | 30 | 7 | - 55 | + 18 | + 35 | 3200 | ST950-30L2MI |
| 1000 | T3 | 0.7 | 7 | 25 | 7 | - 70 | + 10 | + 18 | 2500 | ST1000-30T3MI |
| 1500 | T4 | 0.6 | 12 | 35 | 6 | - 72 | + 10 | + 20 | 3000 | ST1500-30T4MI |
| 50 VDC at 85 °C | | | | | 30 VDC at 125 °C | | | | | |
| 68 | T1 | 1.5 | 1 | 5 | 35 | - 25 | + 8 | + 15 | 1050 | ST68-50T1MI |
| 220 | T2 | 0.9 | 2 | 10 | 17.5 | - 50 | + 8 | + 15 | 1800 | ST220-50T2MI |
| 450 | L2 | 0.6 | 3 | 25 | 7.5 | - 45 | + 12 | + 30 | 2900 | ST450-50L2MI |
| 470 | T3 | 0.75 | 3 | 25 | 10 | - 45 | + 8 | + 15 | 2100 | ST470-50T3MI |
| 680 | T4 | 0.7 | 5 | 40 | 8 | - 58 | + 10 | + 20 | 2750 | ST680-50T4MI |
| 60 VDC at 85 °C | | | | | 40 VDC at 125 °C | | | | | |
| 47 | T1 | 2.0 | 1 | 5 | 44 | - 25 | + 8 | + 12 | 1050 | ST47-60T1MI |
| 150 | T2 | 1.1 | 2 | 10 | 20 | - 40 | + 8 | + 15 | 1800 | ST150-60T2MI |
| 370 | L2 | 0.6 | 3 | 25 | 9 | - 33 | + 9 | + 20 | 2900 | ST370-60L2MI |
| 390 | T3 | 0.9 | 3 | 25 | 15 | - 45 | + 8 | + 15 | 2100 | ST390-60T3MI |
| 560 | T4 | 0.8 | 5 | 40 | 10 | - 58 | + 8 | + 15 | 2750 | ST560-60T4MI |
| 75 VDC at 85 °C | | | | | 50 VDC at 125 °C | | | | | |
| 33 | T1 | 2.5 | 1 | 5 | 66 | - 25 | + 5 | + 9 | 1050 | ST33-75T1MI |
| 110 | T2 | 1.3 | 2 | 10 | 24 | - 35 | + 6 | + 10 | 1650 | ST110-75T2MI |
| 250 | L2 | 0.8 | 5 | 30 | 12 | - 30 | + 6 | + 15 | 2500 | ST250-75L2MI |
| 330 | T3 | 1.0 | 3 | 30 | 12 | - 45 | + 6 | + 10 | 2100 | ST330-75T3MI |
| 470 | T4 | 0.9 | 5 | 50 | 12 | - 50 | + 6 | + 10 | 2750 | ST470-75T4MI |

Notes

- (K = ± 10 %, M = ± 20 %) and insulation letter (I =Insulation, X = Uninsulated)
- Part Numbers shown are for units with ± 20 % capacitance tolerance and uninsulated capacitors. For ± 10 units, change the digit following the letter "X" from "0" to "9". For units with outer plastic-film insulation, substitute "2" for "0" at the end of the Part Number.
- For RoHS compliant add "E3" for suffix.

| STANDARD RATINGS | | | | | | | | | | |
|-------------------------------------------|--------------|----------------------------|-------------|------------------------|-------------------------------------------------|---------------------------------|-------|--------|-------------------------------------------|---------------|
| CAP. AT 25 °C and 120 Hz (µF) | CASE CODE | MAX. ESR Ω 120 Hz | MAX. DCL µA | | MAX. IMP. AT - 55 °C and 120 Hz (Ω) | MAXIMUM CAPACITANCE CHANGE % | | | AC RIPPLE 85 °C 40 kHz mA rms | PART NUMBER |
| | | | 25 °C | 85 °C and 125 °C | | - 55 °C | 85 °C | 125 °C | | |
| 100 VDC at 85 °C | | | | | 65 VDC at 125 °C | | | | | |
| 15 | T1 | 3.5 | 1 | 5 | 125 | - 18 | + 3 | + 10 | 1050 | ST15-100T1MI |
| 68 | T2 | 2.1 | 2 | 10 | 37 | - 30 | + 4 | + 12 | 1650 | ST68-100T2MI |
| 120 | L2 | 1.0 | 3 | 25 | 20.5 | - 30 | + 4 | + 12 | 2200 | ST120-100L2MI |
| 150 | T3 | 1.6 | 3 | 25 | 22 | - 35 | + 6 | + 12 | 2100 | ST150-100T3MI |
| 220 | T4 | 1.2 | 5 | 50 | 15 | - 40 | + 6 | + 12 | 2750 | ST220-100T4MI |
| 125 VDC at 85 °C | | | | | 85 VDC at 125 °C | | | | | |
| 10 | T1 | 5.5 | 1 | 5 | 175 | - 15 | + 3 | + 10 | 1050 | ST10-125T1MI |
| 47 | T2 | 2.3 | 2 | 10 | 47 | - 25 | + 5 | + 12 | 1650 | ST47-125T2MI |
| 90 | L2 | 1.3 | 5 | 25 | 25 | - 22 | + 4 | + 15 | 2000 | ST90-125L2MI |
| 100 | T3 | 1.8 | 3 | 25 | 35 | - 35 | + 5 | + 12 | 2100 | ST100-125T3MI |
| 150 | T4 | 1.6 | 5 | 50 | 20 | - 35 | + 6 | + 12 | 2750 | ST150-125T4MI |

Notes

- (K = ± 10 %, M = ± 20 %) and insulation letter (I =Insulation, X = Uninsulated)
- Part Numbers shown are for units with ± 20 % capacitance tolerance and uninsulated capacitors. For ± 10 units, change the digit following the letter "X" from "0" to "9". For units with outer plastic-film insulation, substitute "2" for "0" at the end of the Part Number.
- For RoHS compliant add "E3" for suffix.

| RIPPLE CURRENT MULTIPLIERS VS. FREQUENCY, TEMPERATURE AND APPLIES PEAK VOLTAGE | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------------------------------------------------|----------|--------|------|------|------|--------|------|------|------|-------|------|------|------|--------|------|------|------|--------|------|------|------|---------|------|------|------|
| FREQUENCY OF APPLIED RIPPLE CURRENT | | 120 Hz | | | | 800 Hz | | | | 1 kHz | | | | 10 kHz | | | | 40 kHz | | | | 100 kHz | | | |
| AMBIENT STILL AIR TEMP. IN °C | | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 |
| % of 85 °C rated peak voltage | 100 % | 0.60 | 0.39 | - | - | 0.71 | 0.43 | - | - | 0.72 | 0.46 | - | - | 0.88 | 0.55 | - | - | 1.0 | 0.63 | - | - | 1.1 | 0.69 | - | - |
| | 90 % | 0.60 | 0.46 | - | - | 0.71 | 0.55 | - | - | 0.72 | 0.55 | - | - | 0.88 | 0.67 | - | - | 1.0 | 0.77 | - | - | 1.1 | 0.85 | - | - |
| | 80 % | 0.60 | 0.52 | 0.35 | - | 0.71 | 0.62 | 0.42 | - | 0.72 | 0.62 | 0.42 | - | 0.88 | 0.76 | 0.52 | - | 1.0 | 0.87 | 0.59 | - | 1.1 | 0.96 | 0.65 | - |
| | 70 % | 0.60 | 0.58 | 0.44 | - | 0.71 | 0.69 | 0.52 | - | 0.72 | 0.70 | 0.52 | - | 0.88 | 0.85 | 0.64 | - | 1.0 | 0.97 | 0.73 | - | 1.1 | 1.07 | 0.80 | - |
| | 66 2/3 % | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 | 0.88 | 0.88 | 0.68 | 0.40 | 1.0 | 1.0 | 0.77 | 0.45 | 1.1 | 1.1 | 0.85 | 0.50 |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.