

Fuse Blocks, Holders and Accessories

Class J POWR-SAFE Holders



Littelfuse POWR-SAFE "Dead Front" fuseholders provide optimum protection to personnel. An integral DIN-Rail adapter system allows fuse holders to be mounted on 35mm DIN-Rail without the use of tools or special parts. Indicating and non-indicating versions are available in 1, 2, or 3 poles for Class J fuses.

Features/benefits


- Meets "Dead Front" requirements and IEC Type IP20 protection.
- Mountable on 35mm DIN-Rail.
- Blown fuse identification (Indicating versions only).
- Easy installation and removal of fuses. No special fuse pullers or tools required.
- UL listed for branch circuit protection.
- Ventilated design for cooler operation.

Ordering Information


| Littelfuse Catalog No. | Littelfuse System No. | No. of Poles | Pack Qty. | Voltage Rating | Ampere Rating | Options |
|------------------------|-----------------------|--------------|-----------|----------------|---------------|------------|
| LPSJ30-1 | LPSJ301.Z | 1 | 6 | 600V | 30A | – |
| LPSJ30-2 | LPSJ302.Z | 2 | 3 | 600V | 30A | – |
| LPSJ30-3 | LPSJ303.Z | 3 | 2 | 600V | 30A | – |
| LPSJ30-1ID | LPSJ301.ZXID | 1 | 6 | 600V | 30A | Indicating |
| LPSJ30-2ID | LPSJ302.ZXID | 2 | 3 | 600V | 30A | Indicating |
| LPSJ30-3ID | LPSJ303.ZXID | 3 | 2 | 600V | 30A | Indicating |
| LPSJ60-1 | LPSJ601.Z | 1 | 6 | 600V | 60A | – |
| LPSJ60-2 | LPSJ602.Z | 2 | 3 | 600V | 60A | – |
| LPSJ60-3 | LPSJ603.Z | 3 | 2 | 600V | 60A | – |
| LPSJ60-1ID | LPSJ601.ZXID | 1 | 6 | 600V | 60A | Indicating |
| LPSJ60-2ID | LPSJ602.ZXID | 2 | 3 | 600V | 60A | Indicating |
| LPSJ60-3ID | LPSJ603.ZXID | 3 | 2 | 600V | 60A | Indicating |

Multi-Pole Assembly Kit: Order No: US3J2PAK to assemble two LPSJ30-1
 US3J3PAK to assemble three LPSJ30-1
 US6J2PAK to assemble two LPSJ60-1
 US6J3PAK to assemble three LPSJ60-1

Dimensions in inches (mm in parentheses)

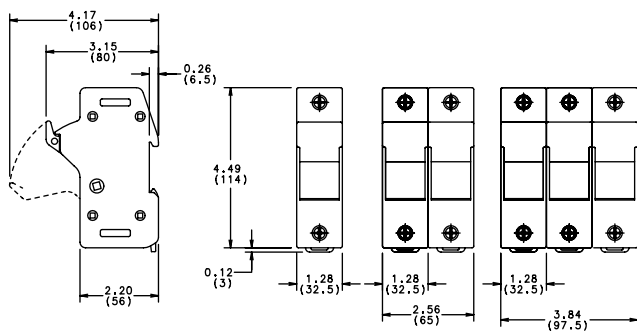

30 Amp

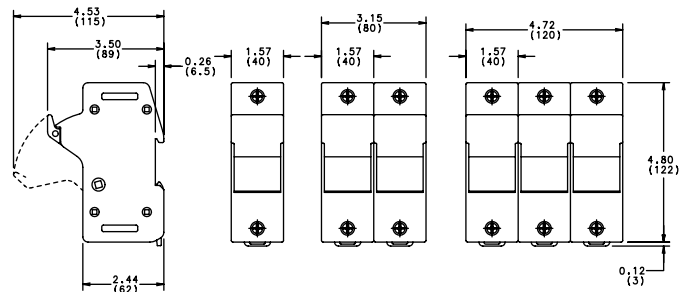

60 Amp

Specifications

Voltage Rating: 600 VAC
Interrupting Rating: 200 kA
Ampere Rating: 30 and 60 amperes
Terminal Type: Pressure plate
Suggested Torque: 30A – 35 inch-pounds
 60A – 45 inch-pounds
Wire Range: #2 – #14CU

Material: Thermo-plastic
Flammability Rating: 94V0
Approvals: UL Listed
 CSA Certified
 IEC Type IP20 Protection
 CE