


Class CC Fuseblocks

600 Volt, 30 Amps

BCA Series



Dimensional Data All dimensions $\pm .015"$
(.38mm)

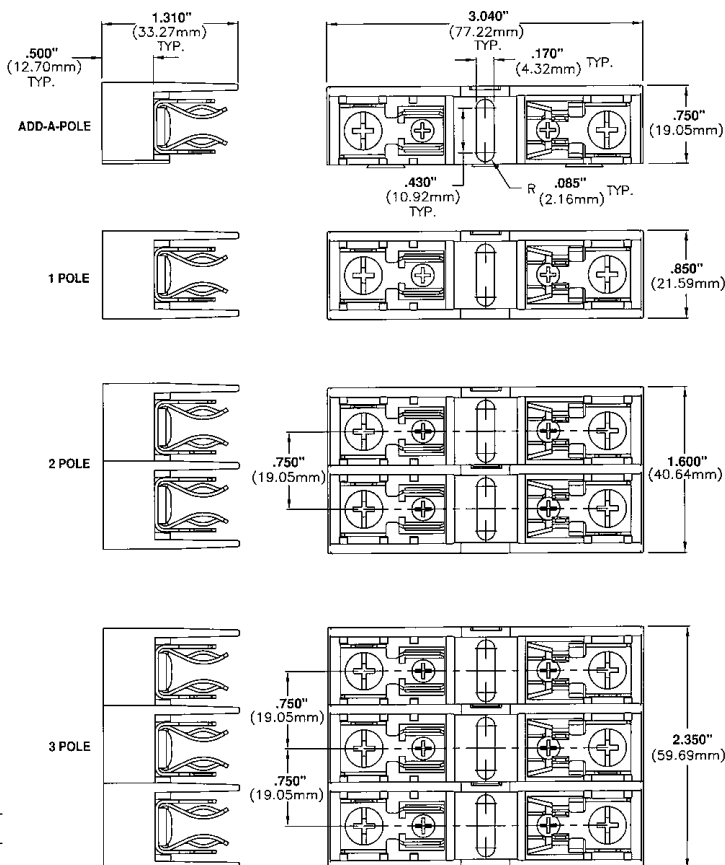

Catalog Symbol: BCA Series

Class CC Fuseblocks

For use with Class CC Fuses (Bussmann LP-CC, KTK-R, and FRQ-R)

Ampere Rating: $\frac{1}{10}$ to 30

Voltage Rating: 600V

Withstand Rating: 200,000A, RMS Sym.

Agency Information:

UL Listed, UL 512, Guide IZLT, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235

UL Flammability: 94 VO

Materials: Base - Thermoplastic

Clips - Bright tin-plated bronze

Catalog Data


Amps	Poles	Terminal Type	
		Screw with Quick Connect*	Pressure Plate with Quick Connect*
$\frac{1}{10}$ to 30	Adder	BCA603ASQ	BCA603APQ
	1	BCA6031SQ	BCA6031PQ
	2	BCA6032SQ	BCA6032PQ
30	3	BCA6033SQ	BCA6033PQ

Wire
Range
CU Only
#10-#18



*QUICK CONNECT RATED FOR 20A MAXIMUM.

FUSEBLOCK MARKING (EXAMPLE SHOWN)



Fuse blocks feature a unique adder block which can be snapped onto 1-, 2-, or 3-pole blocks to form multi-pole segmented blocks of as many poles as desired.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Supplementary Fuseblocks

Type M, For $1\frac{3}{32}$ " x $1\frac{1}{2}$ " Fuses

600 Volt, 30 Amps

BMA Series



Catalog Symbol: BMA Series Type M Supplementary Fuseblocks

For use with any $1\frac{3}{32}$ " x $1\frac{1}{2}$ " Fuses
(Bussmann KTK, FNQ, FNM, BAF, BAN and AGU)

Ampere Rating: $\frac{1}{10}$ to 30A

Voltage Rating: 600V

Withstand Rating: 200,000 RMS Sym. or interrupting rating of the fuse used, whichever is lower.

Agency Information:

UL Recognized, UL 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235

UL Flammability: 94VO



Material: Thermoplastic

Catalog Data


Amps	Poles	Terminal Type	
		Screw with Quick Connect*	Pressure Plate with Quick Connect*
	Adder	BMA603ASQ	BMA603APO
$\frac{1}{10}$	1	BMA6031SQ	BMA6031PQ
to	2	BMA6032SQ	BMA6032PQ
30	3	BMA6033SQ	BMA6033PQ

*QUICK CONNECT RATED FOR 20A MAXIMUM.


Wire
Range
CU Only
#10-#18



Dimensional Data All dimensions $\pm .015$ "
(.38mm)

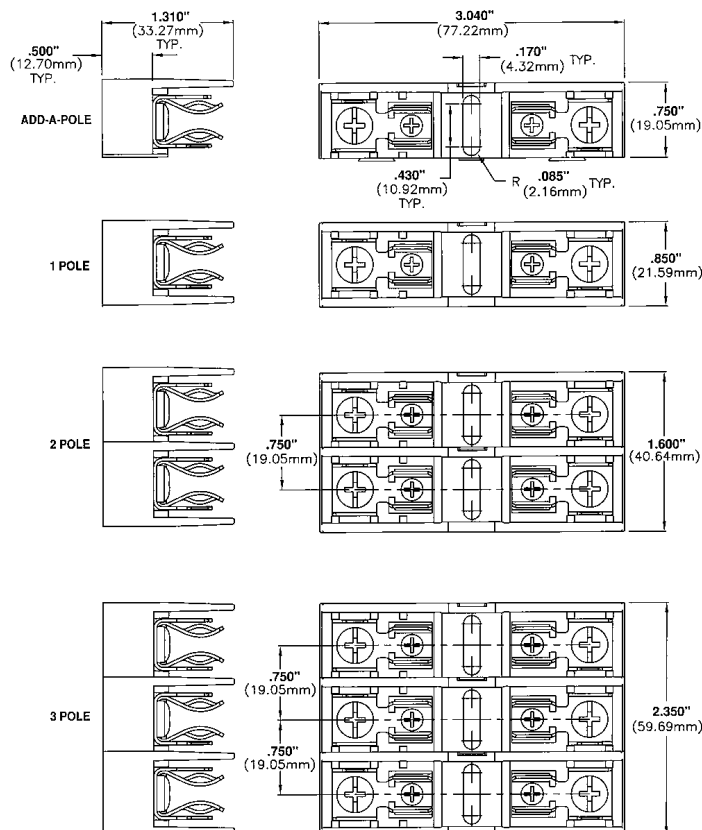

FUSEBLOCK MARKING (EXAMPLE SHOWN)



Fuse blocks feature a unique adder block which can be snapped onto 1-, 2-, or 3-pole blocks to form multi-pole segmented blocks of as many poles as desired.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.