

## DC feedthrough filter



- EN/IEC 60939 approval
- Rated currents from 10 to 200A
- 2.5kV pulse test capability
- Class Y4 capacitor


### Approvals



### Technical specifications

Maximum continuous operating voltage:	130VDC (UL, ENEC) 130VAC, 50/60Hz (UL, ENEC) 650VDC max.
Rated currents:	10 to 200A @ 60°C max.
Capacitor class:	Y4
High potential test voltage:	1700VDC for 2 sec
Insulation resistance (100VDC after 60 sec):	< 0.33μF, R > 15,000MΩ > 0.33μF, τ > 5000s
Temperature range (operation and storage):	-40°C to +100°C (40/100/21)
Flammability corresponding to:	UL 94V-2 or better
MTBF @ 60°C/130V (Mil-HB-217F):	< 200A: 680,000 hours ≥ 200A: 356,000 hours

### Typical electrical schematic

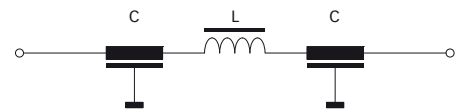

Feedthrough filters offer a high insertion loss across a broad band of frequencies from a few tens of kHz up to the GHz region. In general, feedthrough filters offer a higher level of EMI suppression than feedthrough capacitors of the same current rating. This is particularly relevant to applications where source impedance is smaller than 50Ω.

Different versions are available offering a wide selection on operating currents and performance levels. DC feedthrough filters are designed and approved for 130VDC/130VAC 50/60Hz operation.

### Features and benefits

- Very low internal series inductance.
- Very high self-resonant frequency.
- Self-healing dielectric.
- High quality and reliability.
- Through-bulkhead mounting.
- Anti-twist protection.
- Custom-specific or dual-versions on request.

### Typical applications

- Power line filter for 48VDC battery power
- Increasing system and information security
- Telecom base stations
- Switching and cellular equipment
- Computer servers
- UPS power supplies
- Medical equipment

**Feedthrough selector table**

Feedthrough	Rated current @ 60°C [A]	Leakage current* @ 130VAC/50Hz [mA]	Capacitance** C [nF]	Inductance L @ 10kHz [nH]	DC resistance*** R @ 25°C [mΩ]	Weight [g]
FN 7660-10-M3	10	0.98	10	58	1.06	48
FN 7661-10-M3	10	9.8	100	70	1.2	55
FN 7661-16-M4	16	9.8	100	70	0.7	58
FN 7660-32-M4	32	0.98	10	70	0.65	58
FN 7661-32-M4	32	9.8	100	70	0.7	58
FN 7660-63-M6	63	9.8	100	70	0.42	120
FN 7661-63-M6	63	46	470	186	0.47	250
FN 7660-100-M8	100	46	470	124	0.25	280
FN 7661-100-M8	100	98	1000	186	0.28	320
FN 7660-200-M10	200	46	470	124	0.24	410
FN 7661-200-M10	200	460.7	4700	124	0.24	655

\* Tolerance +20%


\*\* Tolerance ±20%

\*\*\* Tolerance +15%

**Typical filter attenuation**


Full load, 50Ω system

**10A types**

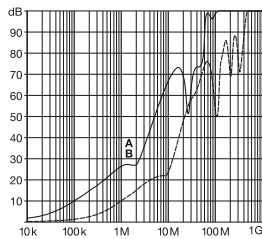


A = FN 7661-10-M3  
B = FN 7660-10-M3

**16A types**

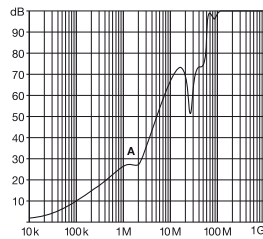


A = FN 7661-16-M4

**32A types**

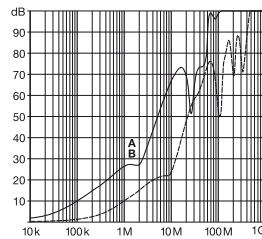


A = FN 7661-32-M4  
B = FN 7660-32-M4

**63A types**

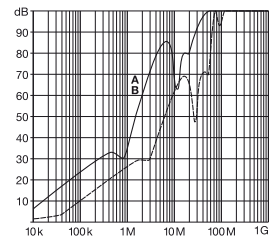


A = FN 7661-63-M6  
B = FN 7660-63-M6

**100A types**

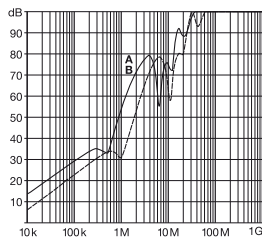

A = FN 7661-100-M8  
B = FN 7660-100-M8


**200A types**

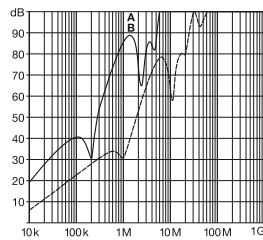

A = FN 7661-200-M10  
B = FN 7660-200-M10

**Mechanical data**

Panel cut out

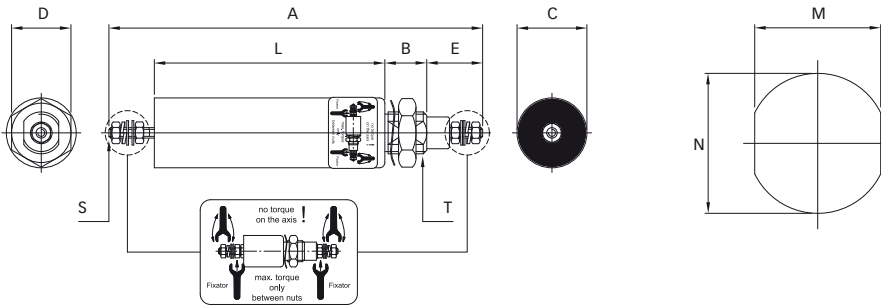

**Dimensions**

	A	B	C	D	E	L	M	N	S	T
<b>FN 7660-10-M3</b>	90	12	20	17	16	49	10.3	Ø12.3	M3	M12x1
<b>FN 7661-10-M3</b>	107	12	20	17	16	66	10.3	Ø12.3	M3	M12x1
<b>FN 7661-16-M4</b>	106	12	20	17	18	61	10.3	Ø12.3	M4	M12x1
<b>FN 7660-32-M4</b>	98	12	20	17	18	53	10.3	Ø12.3	M4	M12x1
<b>FN 7661-32-M4</b>	106	12	20	17	18	61	10.3	Ø12.3	M4	M12x1
<b>FN 7660-63-M6</b>	160	14	25	22	26	94	14.3	Ø16.3	M6	M16x1
<b>FN 7661-63-M6</b>	173	16	32	27	26	105	18.3	Ø20.3	M6	M20x1
<b>FN 7660-100-M8</b>	184	16	32	27	32	104	18.3	Ø20.3	M8	M20x1
<b>FN 7661-100-M8</b>	200	16	32	27	32	120	18.3	Ø20.3	M8	M20x1
<b>FN 7660-200-M10</b>	209	19	38	27	40	112	22.3	Ø24.3	M10	M24x1
<b>FN 7661-200-M10</b>	209	19	54	41	40	112	24.3	Ø27.3	M10	M27x1.5
<b>Tolerances</b>					±2		±0.2			

All dimensions in mm; 1 inch = 25.4mm  
 Tolerances according: ISO 2768-m / EN 22768-m

**Recommended torque**

	M3	M4	M6	M8	M10	M12x1	M16x1	M20x1	M24x1	M27x1.5
<b>Terminal thread</b>	0.5Nm	1.2Nm	2.5Nm	5Nm	8Nm					
<b>Mounting thread</b>						3Nm	4Nm	7Nm	8Nm	12Nm