

PTC Thermistors, Sleeve Type for Over-Temperature Protection



FEATURES

- Well-defined protection temperature levels
- Accurate resistance for ease of circuit design
- Excellent long term behavior (< 1 °C or 5 % after 1000 h at $T_n + 15$ °C)
- Wide range of protection temperatures (70 °C to 150 °C)
- No need to reset supply after overtemperature switch
- Small size and rugged
- Also available as triple sensor
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT

APPLICATIONS

Over-temperature/over-load protection:

- Motor protection (thermal protection of winding)
- Industrial electronics
- Power supplies
- Electronic data processing

DESCRIPTION

These PTC thermistors consist of a small PTC ceramic chip soldered between 2 ETFE insulated silver plated copper wires, insulated by a thermal sleeve.

They are primarily intended for over-temperature sensing inside windings, coils, transformers and alike.


PACKAGING

The PTC thermistors are packed in BULK per 500 pcs.

QUICK REFERENCE DATA		
PARAMETER	VALUE	UNIT
Maximum resistance at 25 °C	100	Ω
Minimum resistance at ($T_n + 15$) °C	4000	Ω
Maximum (AC/DC) voltage	30	V
Thermal time constant	≈ 8.0	s
Temperature range	- 40 to ($T_n + 15$)	°C
Weight	≈ 2.0	g
Climatic category	40/125/56	- °C/+ °C/ days

NOMINAL WORKING TEMPERATURES AND ORDERING INFORMATION				
NOMINAL WORKING TEMPERATURE			CATALOG AND ORDERING NUMBER	12NC REFERENCE NUMBER
T_n (°C)	$R_{max.}$ at $T_n - 5$ °C (Ω)	$R_{min.}$ at $T_n + 5$ °C (Ω)	SLEEVE DEVICE	2381 671
70	570	570	PTCSSLVT071DBE	91402
80	550	1330	PTCSSLVT081DBE	91403
90	550	1330	PTCSSLVT091DBE	91404
100	550	1330	PTCSSLVT101DBE	91405
110	550	1330	PTCSSLVT111DBE	91406
120	550	1330	PTCSSLVT121DBE	91407
130	550	1330	PTCSSLVT131DBE	91409
140	550	1330	PTCSSLVT141DBE	91412
150	550	1330	PTCSSLVT151DBE	91414

COMPONENT OUTLINES dimensions in millimeters

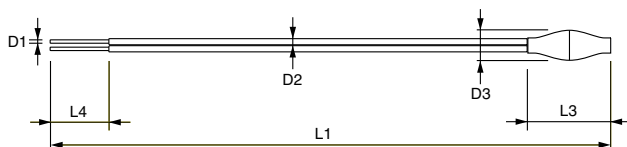

Component outline

L1	500 ± 20
L2	7 ± 2
L3	10 ± 3
D1	0.42
D2	0.7
D3	3 max.






PTCSSLVT Series/2381 671 914..

PTC Thermistors,
Sleeve Type for Over-Temperature Protection

Vishay BCcomponents

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC

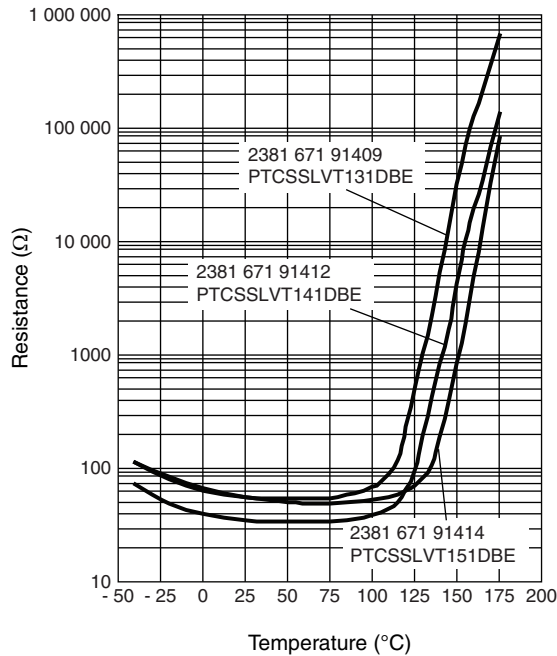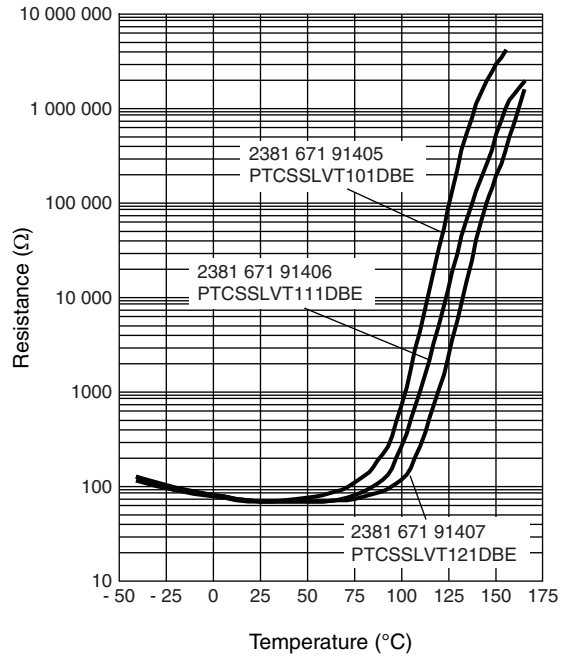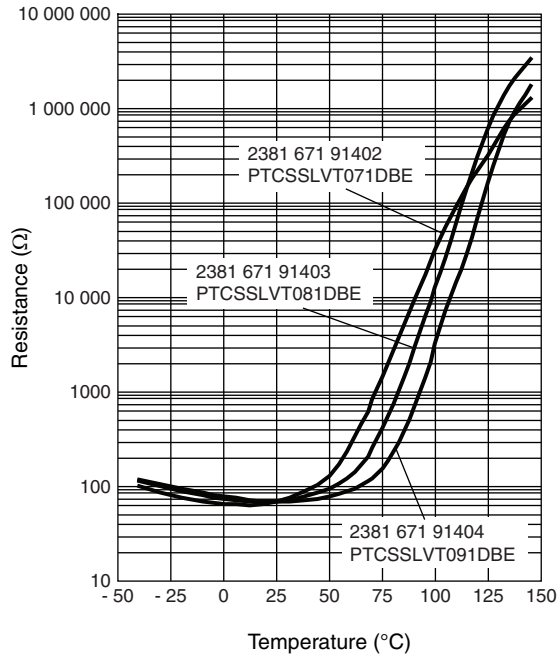

APPLICATION SPECIFIC DATA

Negative Temperature Coefficient (NTC) thermistors are well known for temperature sensing. What is not well known, however, is that Positive Temperature Coefficient (PTC) thermistors can be used for thermal protection. Although their operating principles are similar, the applications are very different; whereas NTC thermistors sense and measure temperature over a defined range, PTC thermistors switch at one particular temperature.

Just like thermostats they protect such equipment and components as motors, transformers, power transistors and thyristors against overtemperature. A PTC thermistor is less expensive than a thermostat, and its switch temperature can be more accurately specified. It is also smaller and easier to design-in to electronic circuitry.

So how does it work? The PTC thermistor is mounted in thermal contact with the equipment to be protected, and connected into the bridge arm of a comparator circuit, such as shown in Fig. 1. At normal temperature, the PTC thermistor resistance (R_p) is lower than R_s (see Fig. 2), so the comparator's output voltage V_o will be low. If an equipment overtemperature occurs, the PTC thermistor will quickly heat up to its trigger or nominal reference temperature T_n , whereupon its resistance will increase to a value much higher than R_s , causing V_o to switch to a high level sufficient to activate an alarm, relay or power shutdown circuit.

APPLICATION EXAMPLES

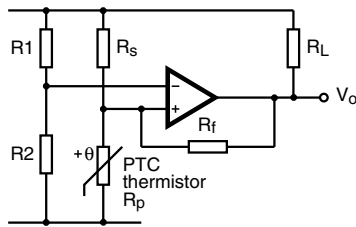


Fig. 1 Typical comparator circuit


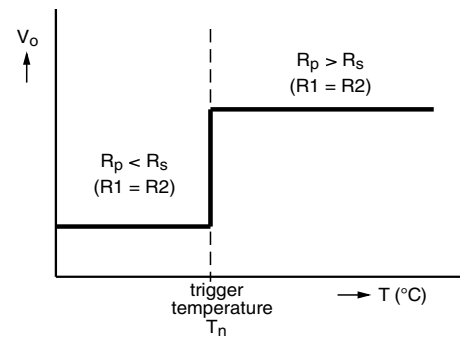


Fig. 2 Typical switch characteristic



As soon as one or more of the windings becomes too hot, the motor is switched off.

Fig. 3 Temperature protection of electric motors

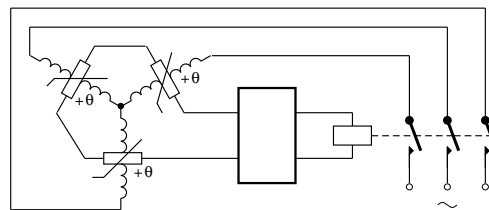

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.