


SMD PTC - Nickel Thin Film Linear Thermistors



FEATURES

- Alumina substrate base with nickel based PTC thin film element
- 0603, 0805 and 1206 sizes available
- Available in tape and reel packaging
- Standard R_{25} tolerances: $\pm 0.5\%$, $\pm 1\%$, $\pm 5\%$
- Operation range - 55 °C to + 125 °C (+ 150 °C)
- Compliant to RoHS directive 2002/95/EC

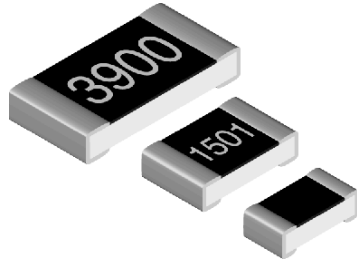

RoHS
COMPLIANT

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | |
|---|--|---|------|-----------|------|------------|
| TCR AT ROOM TEMPERATURE (25 °C) SEE TYPICAL CURVE FOR TCR AT OTHER TEMPS. | TCR ⁽¹⁾ TOLERANCE ppm/K | R_{25} VALUE RANGE in Ω (0.5 %, 1 %, 5 % TOLERANCE) ⁽²⁾ | | | | |
| | | 0603 | | 0805 | | 1206 |
| | | MIN. | MAX. | MIN. | MAX. | MIN. |
| 4110 ppm/K | ± 400 | 100 to 1K | | 100 to 5K | | 100 to 10K |

Notes

- ⁽¹⁾ Contact Vishay if closer TCR lot tolerance is desired
⁽²⁾ Other R_{25} values and tolerances are available upon request

| STANDARD RESISTANCE VALUES at 25 °C in Ω | | | | | |
|---|-----|------|------|-------|--|
| 100 | 270 | 680 | 1.8K | 4.7K | |
| 120 | 330 | 820 | 2.2K | 5.6K | |
| 150 | 390 | 1K | 2.7K | 6.8K | |
| 180 | 470 | 1.2K | 3.3K | 8.2K | |
| 220 | 560 | 1.5K | 3.9K | 10.0K | |


| STANDARD TECHNICAL SPECIFICATIONS | | |
|-----------------------------------|---------------------------------|---|
| PART NUMBER | P_{70} MAXIMUM POWER at 70 °C | MAXIMUM WORKING VOLTAGE RCWV ⁽³⁾ |
| TFPT 0603 | 75 mW | 30 V _{DC} |
| TFPT 0805 | 100 mW | 40 V _{DC} |
| TFPT 1206 | 125 mW | 50 V _{DC} |

Note

- ⁽³⁾ Rated Continuous Working Voltage is maximum working voltage or square root of the power rating times resistance value, whichever is less.


| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | |
|---|---|----------------|---|------------------|---|---|---|---|---|--|---|---|---|---|
| Global Part Numbering: TFPT1206L1002FM (preferred part number format) | | | | | | | | | | | | | | |
| T | F | P | T | 1 | 2 | 0 | 6 | L | 1 | 0 | 0 | 2 | F | M |
| GLOBAL MODEL | | CHARACTERISTIC | | RESISTANCE VALUE | | | TOLERANCE CODE | | | PACKAGING | | | | |
| TFPT0603 TFPT0805 TFPT1206 | | L = Linear | | 1002 = 10K | | | D = $\pm 0.5\%$ F = $\pm 1\%$ J = $\pm 5\%$ | | | F = Lead (Pb)-free, bulk M = Lead (Pb)-free, T/R (5000 pieces) V = Lead (Pb)-free, T/R (1000 pieces) P = Tin/lead, bulk Z = Tin/lead, T/R (5000 pieces) Y = Tin/lead, T/R (1000 pieces) | | | | |

DIMENSIONS in millimeters

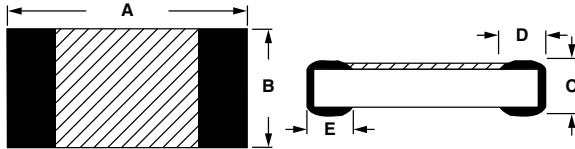


| PART NUMBER | A | B | C | D | E |
|-------------|----------------|----------------|----------------|----------------|----------------|
| TFPT 0603 | 1.60 ± 0.10 | 0.85 ± 0.10 | 0.45 ± 0.10 | 0.30 ± 0.20 | 0.30 ± 0.20 |
| TFPT 0805 | 2.00 ± 0.15 | 1.25 ± 0.15 | 0.45 ± 0.10 | 0.40 ± 0.20 | 0.40 ± 0.20 |
| TFPT 1206 | 3.20 ± 0.15 | 1.60 ± 0.15 | 0.55 ± 0.10 | 0.50 ± 0.25 | 0.50 ± 0.25 |

CONSTRUCTION



Power Derating

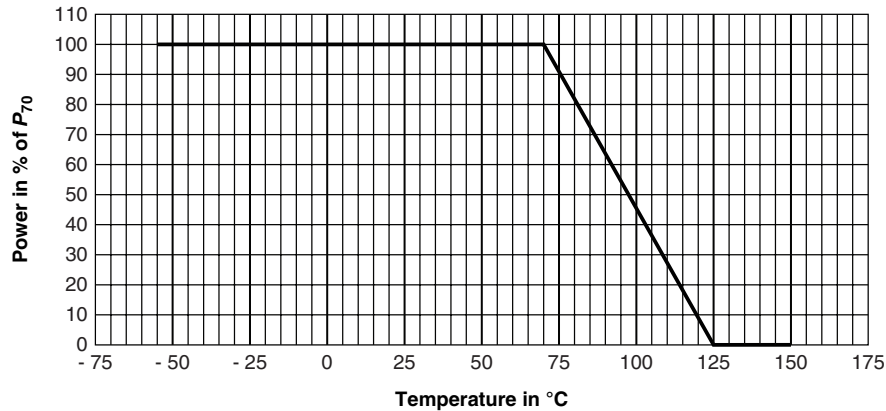

| PERFORMANCE (1) | |
|---|-------------------------------|
| TEST | MAXIMUM $\Delta R/R_{25}$ (2) |
| High Temperature Exposure (100 h at 125 °C) | 0.25 % |
| Effects of Bonding (10 s solder dip at 260 °C) | 0.25 % |
| Thermal Shock (30 min at - 55 °C, 30 min at 125 °C, 5 cycles) | 0.25 % |
| Low Temperature Operation (Maximum rated power for 2 h at - 55 °C) | 0.25 % |
| Short Time Overload (2.5 x RCWV for 5 s) | 0.25 % |
| Load Life (1000 h 70 °C, maximum rated power 1.5 h "ON", 0.5 h "OFF") | 0.25 % |
| Solderability (95 % coverage P/F) | P |
| Leaching (Physical damage P/F) | P |

Notes

- (1) Environmental performance specifications use test procedures as outlined in MIL-R-23648D and MIL-STD-202
- (2) TFPTs are ESD sensitive



| AVERAGE RATIO R/R ₂₅ TFPT ALL SIZES AND VALUES | | | | | | | | | | | |
|---|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|
| TEMP. | R/R ₂₅ | TEMP. | R/R ₂₅ | TEMP. | R/R ₂₅ | TEMP. | R/R ₂₅ | TEMP. | R/R ₂₅ | TEMP. | R/R ₂₅ |
| | | - 20 | 0.825 | 20 | 0.980 | 60 | 1.150 | 100 | 1.337 | 140 | 1.541 |
| | | - 19 | 0.828 | 21 | 0.984 | 61 | 1.155 | 101 | 1.342 | 141 | 1.547 |
| | | - 18 | 0.832 | 22 | 0.988 | 62 | 1.159 | 102 | 1.347 | 142 | 1.552 |
| | | - 17 | 0.836 | 23 | 0.992 | 63 | 1.164 | 103 | 1.352 | 143 | 1.557 |
| | | - 16 | 0.839 | 24 | 0.996 | 64 | 1.168 | 104 | 1.357 | 144 | 1.563 |
| - 55 | 0.702 | - 15 | 0.843 | 25 | 1.000 | 65 | 1.173 | 105 | 1.362 | 145 | 1.568 |
| - 54 | 0.705 | - 14 | 0.847 | 26 | 1.004 | 66 | 1.177 | 106 | 1.367 | 146 | 1.574 |
| - 53 | 0.708 | - 13 | 0.851 | 27 | 1.008 | 67 | 1.182 | 107 | 1.372 | 147 | 1.579 |
| - 52 | 0.712 | - 12 | 0.854 | 28 | 1.012 | 68 | 1.186 | 108 | 1.377 | 148 | 1.584 |
| - 51 | 0.715 | - 11 | 0.858 | 29 | 1.017 | 69 | 1.191 | 109 | 1.382 | 149 | 1.590 |
| - 50 | 0.719 | - 10 | 0.862 | 30 | 1.021 | 70 | 1.196 | 110 | 1.387 | 150 | 1.595 |
| - 49 | 0.722 | - 9 | 0.866 | 31 | 1.025 | 71 | 1.200 | 111 | 1.392 | | |
| - 48 | 0.725 | - 8 | 0.869 | 32 | 1.029 | 72 | 1.205 | 112 | 1.397 | | |
| - 47 | 0.729 | - 7 | 0.873 | 33 | 1.033 | 73 | 1.209 | 113 | 1.402 | | |
| - 46 | 0.732 | - 6 | 0.877 | 34 | 1.037 | 74 | 1.214 | 114 | 1.407 | | |
| - 45 | 0.736 | - 5 | 0.881 | 35 | 1.042 | 75 | 1.219 | 115 | 1.412 | | |
| - 44 | 0.739 | - 4 | 0.885 | 36 | 1.046 | 76 | 1.223 | 116 | 1.417 | | |
| - 43 | 0.743 | - 3 | 0.889 | 37 | 1.050 | 77 | 1.228 | 117 | 1.422 | | |
| - 42 | 0.746 | - 2 | 0.892 | 38 | 1.054 | 78 | 1.232 | 118 | 1.427 | | |
| - 41 | 0.749 | - 1 | 0.896 | 39 | 1.059 | 79 | 1.237 | 119 | 1.432 | | |
| - 40 | 0.753 | 0 | 0.900 | 40 | 1.063 | 80 | 1.242 | 120 | 1.437 | | |
| - 39 | 0.756 | 1 | 0.904 | 41 | 1.067 | 81 | 1.246 | 121 | 1.442 | | |
| - 38 | 0.760 | 2 | 0.908 | 42 | 1.071 | 82 | 1.251 | 122 | 1.448 | | |
| - 37 | 0.763 | 3 | 0.912 | 43 | 1.076 | 83 | 1.256 | 123 | 1.453 | | |
| - 36 | 0.767 | 4 | 0.916 | 44 | 1.080 | 84 | 1.261 | 124 | 1.458 | | |
| - 35 | 0.771 | 5 | 0.920 | 45 | 1.084 | 85 | 1.265 | 125 | 1.463 | | |
| - 34 | 0.774 | 6 | 0.924 | 46 | 1.089 | 86 | 1.270 | 126 | 1.468 | | |
| - 33 | 0.778 | 7 | 0.927 | 47 | 1.093 | 87 | 1.275 | 127 | 1.473 | | |
| - 32 | 0.781 | 8 | 0.931 | 48 | 1.097 | 88 | 1.280 | 128 | 1.478 | | |
| - 31 | 0.785 | 9 | 0.935 | 49 | 1.102 | 89 | 1.284 | 129 | 1.484 | | |
| - 30 | 0.788 | 10 | 0.939 | 50 | 1.106 | 90 | 1.289 | 130 | 1.489 | | |
| - 29 | 0.792 | 11 | 0.943 | 51 | 1.110 | 91 | 1.294 | 131 | 1.494 | | |
| - 28 | 0.796 | 12 | 0.947 | 52 | 1.115 | 92 | 1.299 | 132 | 1.499 | | |
| - 27 | 0.799 | 13 | 0.951 | 53 | 1.119 | 93 | 1.303 | 133 | 1.505 | | |
| - 26 | 0.803 | 14 | 0.955 | 54 | 1.124 | 94 | 1.308 | 134 | 1.510 | | |
| - 25 | 0.806 | 15 | 0.959 | 55 | 1.128 | 95 | 1.313 | 135 | 1.515 | | |
| - 24 | 0.810 | 16 | 0.963 | 56 | 1.133 | 96 | 1.318 | 136 | 1.520 | | |
| - 23 | 0.814 | 17 | 0.967 | 57 | 1.137 | 97 | 1.323 | 137 | 1.526 | | |
| - 22 | 0.817 | 18 | 0.971 | 58 | 1.141 | 98 | 1.328 | 138 | 1.531 | | |
| - 21 | 0.821 | 19 | 0.975 | 59 | 1.146 | 99 | 1.333 | 139 | 1.536 | | |

RATIO FORMULA

$$R_T = R_{25} \times (9.0014 \times 10^{-1} + 3.87235 \times 10^{-3} (^\circ\text{C})^{-1} \times T + 4.86825 \times 10^{-6} (^\circ\text{C})^{-2} \times T^2 + 1.37559 \times 10^{-9} (^\circ\text{C})^{-3} \times T^3)$$



$$T_{(^\circ\text{C})} = 28.54 \times (R_T/R_{25})^3 - 158.5 \times (R_T/R_{25})^2 + 474.8 \times (R_T/R_{25}) - 319.85$$

| RATIO TOLERANCES | | |
|------------------|------------|---------|
| LOW TEMP. | HIGH TEMP. | TOL. |
| - 55 °C | + 150 °C | ± 4 % |
| - 40 °C | + 125 °C | ± 3 % |
| - 20 °C | + 85 °C | ± 2 % |
| 0 °C | + 55 °C | ± 1 % |
| + 12 °C | + 40 °C | ± 0.5 % |

Ratio Tolerance Examples:

At 40 °C, ratio = 1.063 ± 0.5 % (0.005)
so, ratio = 1.058 to 1.068

At 125 °C, ratio = 1.460 ± 3 % (0.044)
so, ratio = 1.416 to 1.504

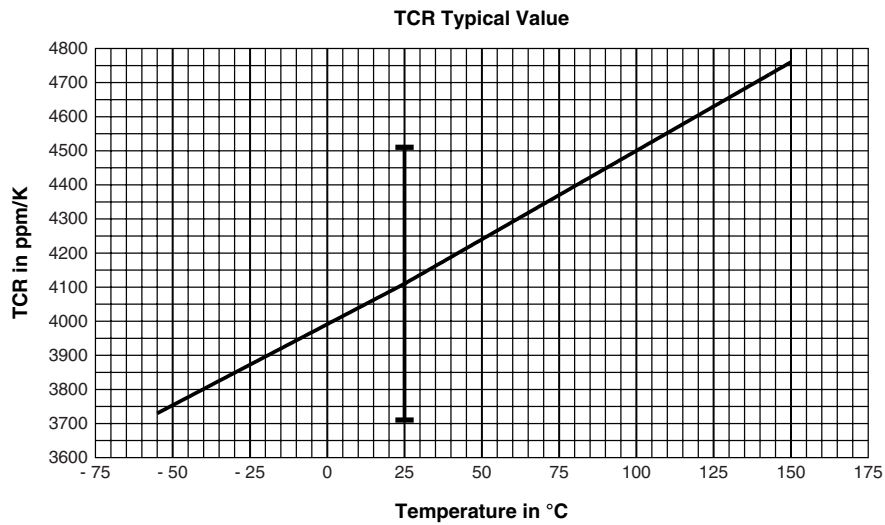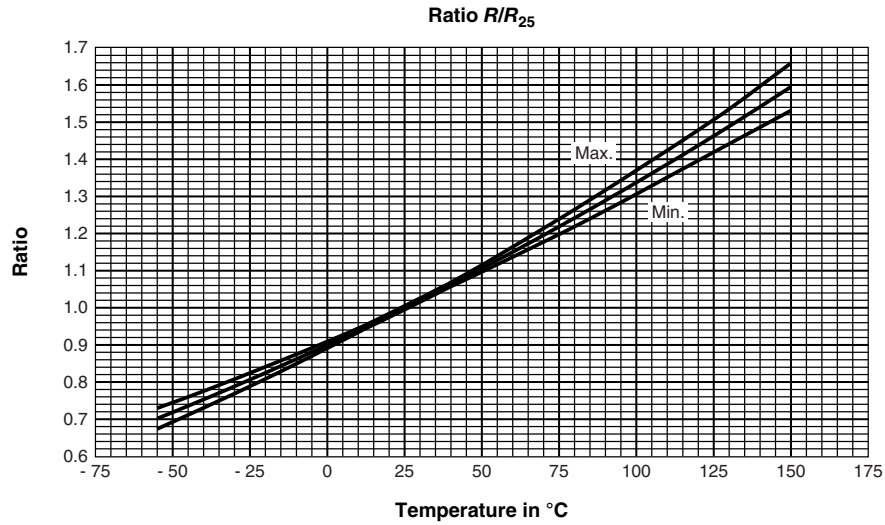



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.