


K1523BA Series 5V Voltage Controlled Crystal Oscillator



- ♦ **Applications:** Phase-Locked Loops (PLL's); Clock Recovery; Reference Signal Tracking; Synthesizers; Frequency Modulation/Demodulation
- ♦ 2.0 to 35.0 MHz Frequency Range
- ♦ 0.5V to 5.0V Control Voltage
- ♦ ±25ppm Frequency Stability
- ♦ Variable Frequency Deviation Sensitivity Options
- ♦ -40°C to +85°C Operating Temperature

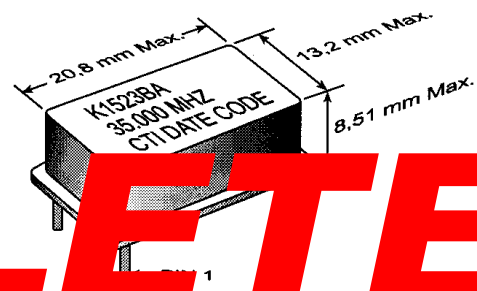

OBSOLETE

Not Recommended for New Designs. Refer to K1570A & K1570AQH Series as an Alternative.


ELECTRICAL SPECIFICATIONS			
Model	K1523BA		
Frequency Range (MHz)	2 to 16	16 to 25	25 to 33
Input Current (mA)	< 19	<19	<26
Frequency Control Function	(For Custom Deviation Range, Vc Range, etc. – Consult Factory)		
Deviation (ppm)			
Minimum	±100		±100
Maximum	±160		±200
Linearity (%)	< 5		<10
Modulation Bandwidth (±3dB)	> 2 KHz	> 20 KHz	
Nominal Control Voltage (V)	2.5		
Control Voltage Range (V)	0.5 to 4.5		
Transfer Function	Positive		
Input Impedance	> 50KΩ @ 10KHz		
Frequency Stability (ppm)			
Overall	Inclusive of Calibration, Temperature, Voltage, Load, and Aging		
0°C to +70°C	±25		±40
-40°C to +85°C	±50		±55
Temperature Range (°C)			
Operating	-40°C to +85°C		
Storage	-40°C to +125°C		
Supply Voltage(V)	+5.0V ±5%		
Symmetry (%) CMOS/TTL	45/55	40/60	
Start Up Time (ms)	< 10		
SSB Phase Noise (dBC/Hz)	10Hz	-65	
Offset from Carrier	100Hz	-95	
	1KHz	-120	
	10KHz	-140	
	100KHz	-150	

PART NUMBERING GUIDE	
K1523BA X	- Specific Frequency
└─┬─┘	“Blank” = 0°C to +70°C Operating Temp.
└─┬─┘	“M” = -40°C to +85°C Operating Temp.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.


Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

K1523BA Series 5V Voltage Controlled Crystal Oscillator

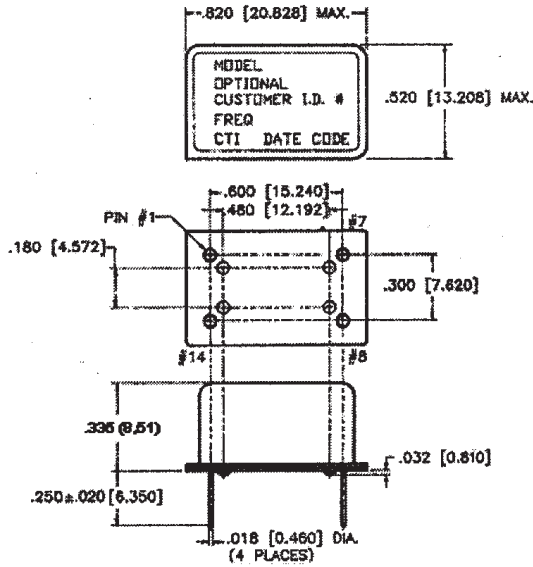


PIN	FUNCTION
1	Voltage Control
7	Gnd/ & Case Gnd
8	Output
14	+V _{CC}

SHIPPING TUBE CROSS SECTION

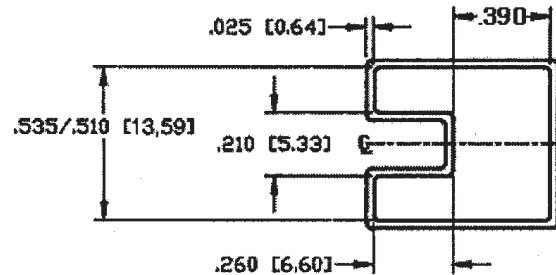


ALL DIMENSIONS ARE INSIDE

OUTPUT WAVEFORM

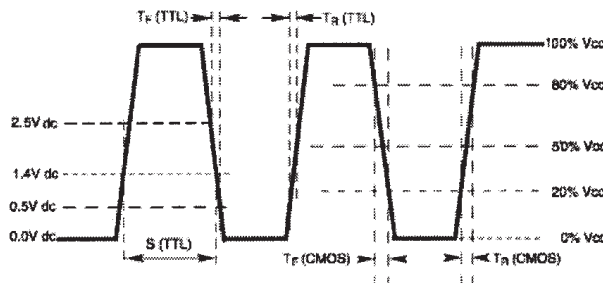

TEST CIRCUIT DIAGRAM

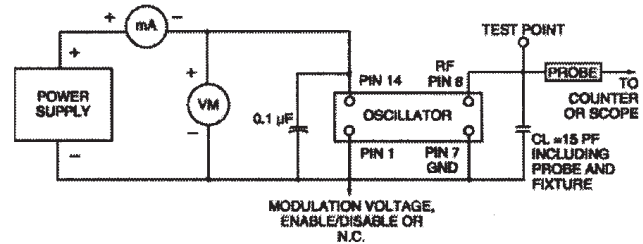

MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS

TEST METHODS	REFERENCE PROCEDURES	DESCRIPTION
Temperature Cycle	MIL-STD-833, Mtd 1010, Cond. B	-55°C to +125°C; Air-to-Air; 100 cycles; 10 min. dwell
Mechanical Shock	MIL-STD-883, Mtd 2002, Cond. B	1500 g's
Vibration	MIL-STD 883, Mtd 2007, Cond. B	20-2000 Hz; 0.06 inch; 15g's; 3 planes
Humidity Steady State	MIL-STD-202, Mtd 103	40°C; 90%-95% R.H.; 56 days
Thermal Shock	MIL-STD-883, Mtd 1011.7 Cond. B	100°C to 0°C; Water-to-Water; 15 cycles
Electrostatic Discharge	MIL-STD-883, Mtd 3015 Class II	2 KV to 4 KV Threshold
Solderability	MIL-STD-883, Mtd 2022.2	Solder dip; Meniscograph Criteria
Hermeticity	MIL-STD-883, Mtd 1014.8, Cond. A1	Mass spectro. 2 x 10 ⁻⁸ atmos. CC/sec He
Resistance to Soldering	MIL-STD-202, Mtd 210D, Cond. C	260°C; 10 seconds: 1 inch/sec.
Lead Integrity	MIL-STD-883, Mtd 2004.5, Cond. A, B1	Lead tension & bend stress
Marking Permanence	MIL-STD-883, Mtd 2015.8	Resistance to solvents
Life Test	MIL-STD-883, Mtd 1005.6	125°C. powered. 1000 hours minimum

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.