


TaNFilm® Precision Chip Voltage Divider



PFC Divider Series

- Popular 1206 Chip Size
- 5Ω to 150KΩ per resistor
- Tested for COTS applications
- Superior alternative to matched sets
- Standard Sn/Pb and 100% tin (Pb-free) terminations available

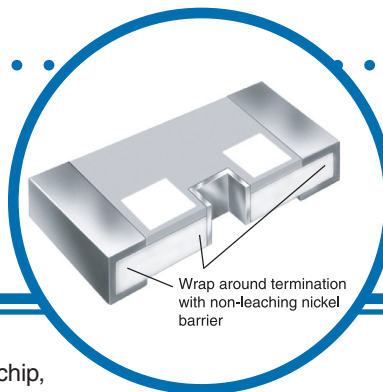

IRC now has a perfect voltage divider solution. Designed around the 1206 sized chip, the PFC Divider series provides a single package solution that is compatible with your automatic placement equipment. The ratio tolerance can be specified down to 0.05%* which is much tighter than the 0.2% achievable from two individual 0.1% chip resistors. Similarly, the TCR tracking of 5 ppm/°C is far superior to the tracking obtainable from two individual 25 ppm/°C chip resistors. IRC's TaNFilm® Tantalum Nitride film system provides superior environmental performance while insuring long term life stability.

This dual element, monolithic package offers the advantages of reducing component quantities and board space while increasing quality and reliability.

For a precision voltage divider network in a small package solution, specify IRC TaNFilm® PFC Dividers.

Electrical Data

Characteristic	Each Resistor	Total Resistance
Resistance Range	10 - 150KΩ	200KΩ
Power Rating	125mW	250mW
Absolute TCR	to ±25ppm/°C*	
Tracking TCR	to ±5ppm/°C*	
Maximum Voltage Rating	100 volts	
Operating Temperature Range	-65°C to +150°C	
Noise	Less than -25 db	
Termination	60/40 Sn/Pb or 100% tin (Pb-free)	

*Tighter Tolerance and Higher Resistance value available. Contact factory for more information

General Note

IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

© IRC Advanced Film Division • 4222 South Staples Street • Corpus Christi Texas 78411 USA
Telephone: 361 992 7900 • Facsimile: 361 992 3377 • Website: www.irctt.com




A subsidiary of
TT electronics plc

PFC Series Issue January 2009 Sheet 1 of 3

TaNFilm® Precision Chip Voltage Divider

Physical Data

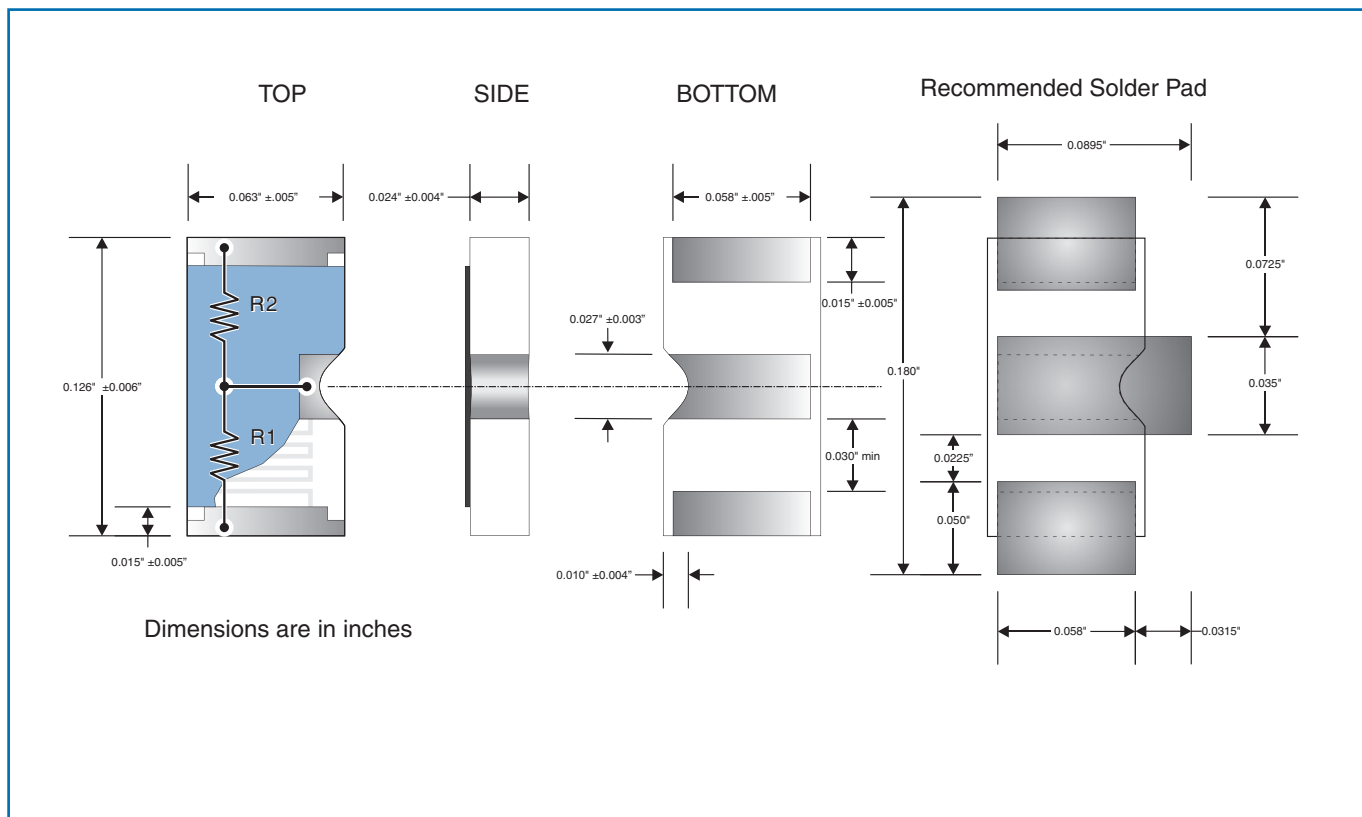

Environmental Data

Test	Method	$\Delta R/R$	ΔRatio
Thermal Shock	MIL-STD-202 -65 to +125°C, 5 Cycles	±.02%	±.005%
Short Time Overload	MIL-PRF-55342	±.02%	±.005%
High Temperature Exposure	MIL-PRF-55342	±.03%	±.01%
Resistance to Bond Exposure	MIL-PRF-55342	±.01%	±.01%
Moisture Resistance	MIL-STD-202 10 Cycles, 240 hours 10% Rated Power	±.03%	±.02%
Load Life (Rated Power)	MIL-PRF-55342 70°C, 1000 hours	±.03%	±.01%
Low Temperature Operation	MIL-PRF-55342	±.01%	±.005%


TaNFilm® Precision Chip Voltage Divider



Manufacturing Capability

Range of Lowest Resistor	Available Absolute Tolerances	Available Ratio Tolerances	Best Absolute TCR	Best Tracking TCR
5Ω - 24Ω	F	F D	±100ppm/°C	±50ppm/°C
25Ω - 50Ω	F D B	F D B	±50ppm/°C	±20ppm/°C
51Ω - 75Ω	F D B	F D B	±25ppm/°C	±10ppm/°C
76Ω - 999Ω	F D B	F D B A	±25ppm/°C	±5ppm/°C
1.0KΩ - 100KΩ	F D B A	F D B A Q T	±25ppm/°C	±5ppm/°C

Packaging Data

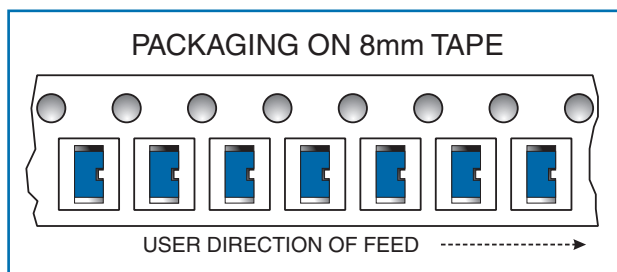

Ordering Data

Prefix **PFC** - **D1206** - **03** - **1003** - **3301** - **F** **B**

Model
 D1206 - Divider network w/ standard Sn/Pb termination
 D1206LF - Divider network w/ 100% tin, Pb-free termination

TCR Code*
 01 = ±100ppm/°C; 02 = ±50ppm/°C; 03 = ±25ppm/°C

R1 Resistance Code
 Standard 4-Digit resistance code.
 Ex: 1002 = 10KΩ; 50R0 = 50Ω

R2 Resistance Code
 Standard 4-Digit resistance code

Absolute Tolerance*
 F = ±1%; D = ±0.5%; B = ±0.1%; A = ±0.05%

Ratio Tolerance*
 F = ±1%; D = ±0.5%; B = ±0.1%; A = ±0.05%, Q = ±0.02%, T = ±0.01%

* For tighter tolerance and tighter TCR requirements, please refer to IRC's Ultra Precision datasheet.

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.