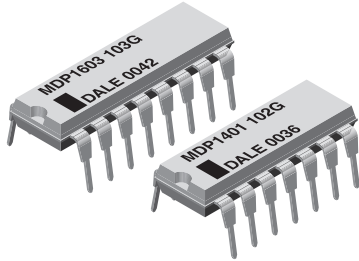


Thick Film Resistor Networks, Dual-In-Line, Molded DIP


FEATURES

- Isolated, bussed and dual terminator schematics available
- 0.160" (4.06 mm) maximum seated height and rugged, molded case construction
- Thick film resistive elements
- Low temperature coefficient (- 55 °C to + 125 °C) ± 100 ppm/°C
- Reduces total assembly costs
- Compatible with automatic inserting equipment
- Wide resistance range (10 Ω to 2.2 MΩ)
- Uniform performance characteristics
- Available in tube pack
- Compliant to RoHS directive 2002/95/EC


RoHS*
COMPLIANT

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | | |
|------------------------------------|-----------|---|-----------------------|----------------------|--|---|-------------|
| GLOBAL MODEL/ NO. OF PINS | SCHEMATIC | POWER RATING ELEMENT (1) P _{70 °C} W | RESISTANCE RANGE Ω | TOLERANCE (3) ± % | TEMPERATURE COEFFICIENT (- 55 °C to + 125 °C) ± ppm/°C | TCR TRACKING (2) (- 55 °C to + 125 °C) ± ppm/°C | WEIGHT g |
| MDP 14 | 01 | 0.125 | 10 to 2.2M | 1, 2, 5 | 100 | 50 | 1.3 |
| | 03 | 0.250 | 10 to 2.2M | | | 50 | |
| | 05 | 0.125 | Consult factory | | | 100 | |
| MDP 16 | 01 | 0.125 | 10 to 2.2M | 1, 2, 5 | 100 | 50 | 1.5 |
| | 03 | 0.250 | 10 to 2.2M | | | 50 | |
| | 05 | 0.125 | Consult factory | | | 100 | |

Notes

(1) For resistor power ratings at + 25 °C see derating curves


(2) Tighter tracking available

(3) ± 2 % standard, ± 1 % and ± 5 % available

| GLOBAL PART NUMBER INFORMATION | | | | | | | |
|---|---|---|--|--|---|--|--|
| New Global Part Numbering: MDP1403100RGD04 (preferred part numbering format) | | | | | | | |
| <div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> M D P 1 4 0 3 1 0 0 R G D 0 4 </div> | | | | | | | |
| GLOBAL MODEL MDP | PIN COUNT 14 = 14 pin 16 = 16 pin | SCHEMATIC 01 = Bussed 03 = Isolated 00 = Special | RESISTANCE VALUE R = Ω K = kΩ M = MΩ 10R0 = 10 Ω 680K = 680 kΩ 1M00 = 1.0 MΩ | TOLERANCE CODE F = ± 1 % G = ± 2 % J = ± 5 % S = Special | PACKAGING E04 = Lead (Pb)-free, tube D04 = Tin/lead, tube | SPECIAL Blank = Standard (Dash Number) (Up to 3 digits) From 1 to 999 as applicable | |
| Historical Part Number example: MDP1403101G (will continue to be accepted) | | | | | | | |
| MDP | 14 | 03 | 101 | G | D04 | | |
| HISTORICAL MODEL | PIN COUNT | SCHEMATIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING | | |
| New Global Part Numbering: MDP1405121CGD04 (preferred part numbering format) | | | | | | | |
| <div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> M D P 1 4 0 5 1 2 1 C G D 0 4 </div> | | | | | | | |
| GLOBAL MODEL MDP | PIN COUNT 14 = 14 pin 16 = 16 pin | SCHEMATIC 05 = Dual terminator | RESISTANCE VALUE 3 digit impedance code, followed by alpha modifier (see Impedance Codes table) | TOLERANCE CODE F = ± 1 % G = ± 2 % J = ± 5 % | PACKAGING E04 = Lead (Pb)-free, tube D04 = Tin/lead, tube | SPECIAL Blank = Standard (Dash Number) (Up to 3 digits) From 1 to 999 as applicable | |
| Historical Part Number example: MDP1405221271G (will continue to be accepted) | | | | | | | |
| MDP | 14 | 05 | 221 | 271 | G | D04 | |
| HISTORICAL MODEL | PIN COUNT | SCHEMATIC | RESISTANCE VALUE 1 | RESISTANCE VALUE 2 | TOLERANCE CODE | PACKAGING | |

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches (millimeters)

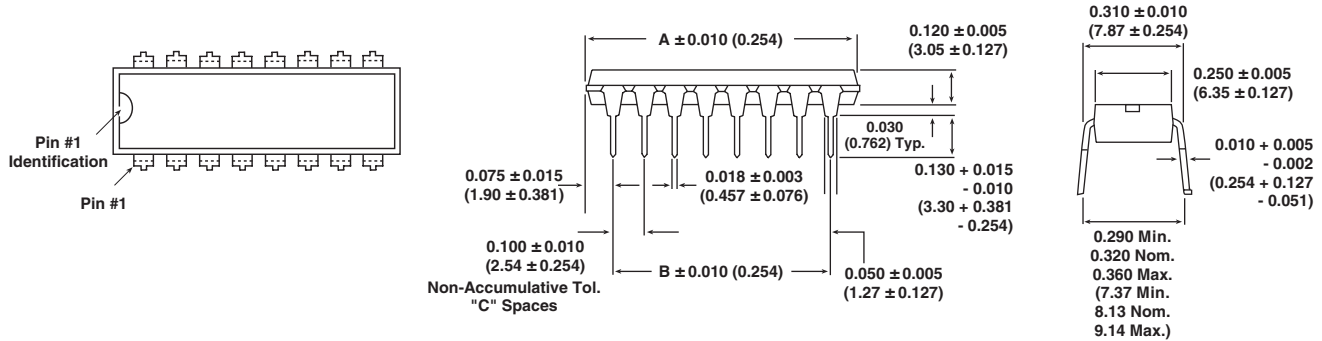


| GLOBAL MODEL | A | B | C |
|--------------|---------------|---------------|---|
| MDP 14 | 0.750 (19.05) | 0.600 (15.24) | 6 |
| MDP 16 | 0.850 (21.59) | 0.700 (17.78) | 7 |

| TECHNICAL SPECIFICATIONS | | | |
|---|-----------|-------------------|-------|
| PARAMETER | UNIT | MDP14 | MDP16 |
| Package Power Rating (Maximum at + 70 °C) | W | 1.73 | 1.92 |
| Voltage Coefficient of Resistance | V_{eff} | < 50 ppm typical | |
| Dielectric Strength | V_{AC} | 200 | |
| Insulation Resistance | Ω | > 10 000M minimum | |
| Operating Temperature Range | °C | - 55 to + 125 | |
| Storage Temperature Range | °C | - 55 to + 150 | |

| MECHANICAL SPECIFICATIONS | |
|--------------------------------|--|
| Marking Resistance to Solvents | Permanency testing per MIL-STD-202, method 215 |
| Solderability | Per MIL-STD-202, method 208E |
| Body | Molded epoxy |
| Terminals | Solder plated leads |
| Weight | 14 pin = 1.3 g; 16 pin = 1.5 g |

| IMPEDANCE CODES | | | | | |
|-----------------|-----------------|-----------------|------|-----------------|-----------------|
| CODE | R1 (Ω) | R2 (Ω) | CODE | R1 (Ω) | R2 (Ω) |
| 500B | 82 | 130 | 141A | 270 | 270 |
| 750B | 120 | 200 | 181A | 330 | 390 |
| 800C | 130 | 210 | 191A | 330 | 470 |
| 990A | 160 | 260 | 221B | 330 | 680 |
| 101C | 180 | 240 | 281B | 560 | 560 |
| 111C | 180 | 270 | 381B | 560 | 1.2K |
| 121B | 180 | 390 | 501C | 620 | 2.7K |
| 121C | 220 | 270 | 102A | 1.5K | 3.3K |
| 131A | 220 | 330 | 202B | 3K | 6.2K |

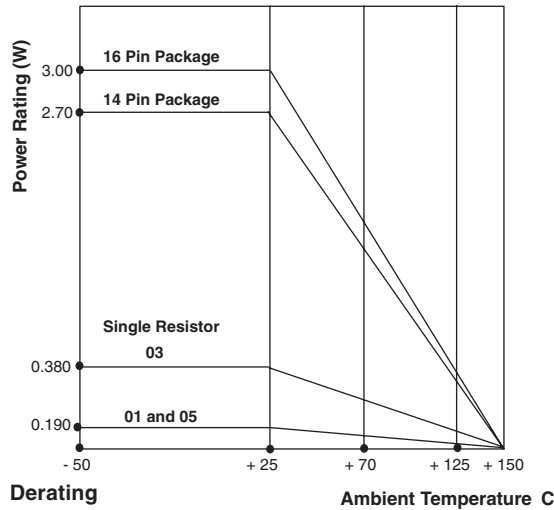

| CIRCUIT APPLICATIONS | |
|----------------------------|--|
| <p>01 SCHEMATIC</p> | <p>13 and 15 resistors with one pin common</p> <p>The MDPXX01 circuit provides a choice of 13 and 15 nominally equal resistors, each connected between a common pin (14 and 16) and a discrete PC board pin. Commonly used in the following applications:</p> <ul style="list-style-type: none"> • MOS/ROM Pull-up/Pull-down • Open Collector Pull-up • "Wired OR" Pull-up • Power Driven Pull-up • TTL Input Pull-down • Digital Pulse Squaring • TTL Unused Gate Pull-up • High Speed Parallel Pull-up |
| <p>03 SCHEMATIC</p> | <p>7 and 8 isolated resistors</p> <p>The MDPXX03 provides a choice of 7 and 8 nominally equal resistors, each resistor isolated from all others and wired directly across. Commonly used in the following applications:</p> <ul style="list-style-type: none"> • "Wired OR" Pull-up • Power Driven Pull-up • Powergate Pull-up • Line Termination • Long-line Impedance Balancing • LED Current Limiting • ECL Output Pull-down • TTL Input Pull-down |
| <p>05 SCHEMATIC</p> | <p>TTL dual-line terminator; pulse squaring</p> <p>The MDPXX05 circuit contains 12 and 14 series pair of resistors. Each series pair is connected between ground and a common line. The junction of these resistor pairs is connected to the input terminals.</p> <p>The 05 circuits are designed for TTL dual-line termination and pulse squaring.</p> |

Note

- Standard E24 resistance values stocked. Consult factory.



| PERFORMANCE | | |
|---------------------------------|---|---|
| TEST | CONDITIONS | MAX. ΔR (TYPICAL TEST LOTS) |
| Power Conditioning | 1.5 rated power, applied 1.5 h "ON" and 0.5 h "OFF" for 100 h \pm 4 h at + 25 °C ambient temperature | \pm 0.50 % ΔR |
| Thermal Shock | 5 cycles between - 65 °C and + 125 °C | \pm 0.50 % ΔR |
| Short Time Overload | 2.5 x rated working voltage 5 s | \pm 0.25 % ΔR |
| Low Temperature Operation | 45 min at full rated working voltage at - 65 °C | \pm 0.25 % ΔR |
| Moisture Resistance | 240 h with humidity ranging from 80 % RH to 98 % RH | \pm 0.50 % ΔR |
| Resistance to Soldering Heat | Leads immersed in + 350 °C solder to within 1/16" of device body for 3 s | \pm 0.25 % ΔR |
| Shock | Total of 18 shocks at 100 g's | \pm 0.25 % ΔR |
| Vibration | 12 h at maximum of 20 g's between 10 Hz and 2000 Hz | \pm 0.25 % ΔR |
| Load Life | 1000 h at + 70 °C, rated power applied 1.5 h "ON, 0.5 h "OFF" for full 1000 h period. Derated according to the curve. | \pm 1.00 % ΔR |
| Terminal Strength | 4.5 pound pull for 30 s | \pm 0.25 % ΔR |
| Insulation Resistance | 10 000 M Ω (minimum) | - |
| Dielectric Withstanding Voltage | No evidence of arcing or damage (200 V _{RMS} for 1 min) | - |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.