


- Features:
- Nickel Barrier terminations standard
 - Power derating from 100% at 70°C to zero at +155°C
 - Zero ohm available (max resistance 0.05Ω)
 - RoHS compliant / lead-free available (RMCF)

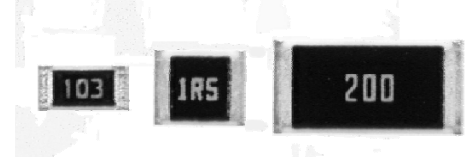

Electrical Specifications								
Type / Code	Package Type	Power Rating (Watts) @ 70°C	Maximum Working Voltage (1)	Maximum Overload Voltage	Maximum Current	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance (2)	
							1%	5%
RMCF 1/20	0201	0.050W	25V	50V	1 Amp	± 600 ppm/°C ± 300 ppm/°C	1 - 24.9 25 - 10M	1 - 24.9 25 - 10M
RMCF 1/16S	0402	0.063W	50V	100V	1 Amp	± 500 ppm/°C ± 200 ppm/°C	1 - 9.76 10 - 1M	1 - 9.1 10 - 20M
RMCF 1/16	0603	0.100W	50V	100V	1 Amp	± 600 ppm/°C ± 200 ppm/°C ± 100 ppm/°C ± 200 ppm/°C	0.1 - 0.499 0.5 - 32.4 33.2 - 1M 1.1M - 10M	0.1 - 0.499 0.5 - 20M - -
RMCF 1/10	0805	0.125W	150V	300V	2 Amp	± 500 ppm/°C ± 200 ppm/°C ± 100 ppm/°C ± 200 ppm/°C	0.1 - 0.976 1 - 32.4 33.2 - 1M 1.1M - 22.1M	0.1 - 0.910 1 - 22M - -
RMCF 1/8	1206	0.250W	200V	400V	2 Amp	± 500 ppm/°C ± 200 ppm/°C ± 100 ppm/°C ± 200 ppm/°C	0.1 - 0.976 1 - 32.4 33.2 - 1M 1.1M - 10M	0.1 - 0.910 1 - 22M - -
RMCF 1/4	1210	0.330W(3)	200V	400V	3 Amp	± 400 ppm/°C ± 200 ppm/°C ± 100 ppm/°C ± 200 ppm/°C	0.1 - 9.76 10 - 32.4 33.2 - 1M 1.1M - 10M	0.1 - 9.1 - - 10 - 20M
RMCF 1/2	2010	0.750W(3)	200V	400V	3 Amp	± 500 ppm/°C ± 400 ppm/°C ± 200 ppm/°C ± 100 ppm/°C	0.1 - 0.499 0.5 - 9.76 - 10 - 10M	0.1 - 0.499 0.5 - 9.1 10 - 10M -
RMCF 1	2512	1.000W	200V	400V	3 Amp	± 500 ppm/°C ± 400 ppm/°C ± 200 ppm/°C ± 100 ppm/°C	0.1 - 0.499 0.5 - 9.76 - 10 - 10M	0.1 - 0.499 0.5 - 9.1 10 - 10M -

(1) Lesser of √PR or maximum working voltage.

(2) Contact factory for extended ohmic values.

(3) Power rating is 0.500W for ohmic values below 1Ω



Mechanical Specifications						
Type / Code	L Body Length	W Body Width	H Body Height	a Top Termination	b Bottom Termination	Units
RMCF 1/20	0.024 ± 0.001 0.60 ± 0.03	0.011 ± 0.001 0.30 ± 0.03	0.010 ± 0.002 0.25 ± 0.05	0.005 ± 0.01 0.12 ± 0.3	0.006 ± 0.002 0.15 ± 0.05	inches mm
RMCF 1/16S	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.002 0.50 ± 0.05	0.011 ± 0.004 0.30 ± 0.10	0.008 ± 0.004 0.20 ± 0.10	0.010 ± 0.004 0.25 ± 0.10	inches mm
RMCF 1/16	0.061 ± 0.006 1.55 ± 0.15	0.031 + 0.006 / - 0.004 0.80 + 0.15 / - 0.10	0.018 ± 0.004 0.45 ± 0.10	0.012 ± 0.008 0.30 ± 0.20	0.012 ± 0.008 0.30 ± 0.20	inches mm
RMCF 1/10	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.004 1.25 ± 0.10	0.020 ± 0.006 0.50 ± 0.15	0.014 ± 0.010 0.35 ± 0.25	0.014 ± 0.010 0.35 ± 0.25	inches mm
RMCF 1/8	0.126 ± 0.008 3.20 ± 0.20	0.063 ± 0.006 1.60 ± 0.15	0.021 ± 0.006 0.55 ± 0.15	0.020 ± 0.012 0.50 ± 0.30	0.020 ± 0.012 0.50 ± 0.30	inches mm
RMCF 1/4	0.126 ± 0.010 3.20 ± 0.25	0.098 ± 0.008 2.50 ± 0.20	0.021 ± 0.006 0.55 ± 0.15	0.020 ± 0.012 0.50 ± 0.30	0.020 ± 0.012 0.50 ± 0.30	inches mm
RMCF 1/2	0.197 ± 0.008 5.00 ± 0.20	0.098 ± 0.008 2.5 ± 0.20	0.021 ± 0.006 0.55 ± 0.15	0.024 ± 0.012 0.60 ± 0.30	0.024 ± 0.014 0.60 ± 0.35	inches mm
RMCF 1	0.248 ± 0.008 6.30 ± 0.20	0.126 ± 0.008 3.20 ± 0.20	0.021 ± 0.006 0.55 ± 0.15	0.024 ± 0.012 0.60 ± 0.30	0.024 ± 0.014 0.60 ± 0.35	inches mm

Performance Characteristics		
Test	Test Conditions (JIS C 5202)	Test Results
Short Time Overload	2.5x rated voltage for 5 seconds	± (2% + 0.1Ω)
Dielectric Withstanding Voltage	100 VAC, 1 minute	± (1% + 0.05Ω)
Resistance to Soldering Heat	260°C ±5°C, for 10 sec. ±0.5 sec. (Solder Bath)	± 1%
Solderability	235°C ±5°C, for 2 sec. ±0.5 sec. (Colophonium flux)	95% coverage, minimum
Temperature Cycle	-65°C: 30 min. 25°C: 2 to 3 min. 155°C: 30 min. 25°C: 2 to 3 min. (5 Cycles)	±(1% + 0.05Ω) Jumper (<0.05Ω)
Endurance (Damp load)	40°C ± 2°C, 90% RH, Rated Load 90 min. On, 30 min. Off for 1,000 hrs. -0hrs./+48hrs.	±(3% + 0.1Ω) Jumper (<0.05Ω)
Endurance (Rated load)	70°C ± 2°C, Rated Load 90 min. On, 30 min. Off for 1,000 hrs. -0hrs./+48hrs.	±(3% + 0.1Ω) Jumper (<0.05Ω)
Voltage Coefficient	1/10 rated voltage for 3 sec. max. then rated voltage for 3 sec. max.	±100 (ppm/V)
Robustness of Termination	Bend of 3mm for 5 ± 1 sec.	± (1% + 0.05 Ohm)

Operating Temperature Range: -55°C to +125°C (0201 size)
-55°C to +155°C (all others)

How to Order

SEI Type		Code			Nominal Resistance	Tolerance		Packaging			
RMC		1/16			4.7K	5%		R			
Type	Description	Code	Wattage	Size	Tolerance		Values	SEI Types	Pkg Qty	Description	Code
RMC	Standard	1/20	0.050W	0201	1%		E96,E24	1/20	10,000	7" reel - Paper or Embossed	R
RMCF	RoHS	1/16S	0.063W	0402	5%		E24		15,000		G
		1/16	0.100W	0603				1/16S	10,000		R
		1/10	0.125W	0805				1/16, 1/10, 1/8	10,000	10" reel - Paper or Embossed	G
		1/8	0.250W	1206					5,000	7" reel - Paper or Embossed	R
		1/4	0.330W	1210				1,000	Bulk		A
		1/2	0.750W	2010				1/4, 1/2, 1	4,000	7" - Embossed	R
		1	1.000W	2512							

New part number format starting January 3rd, 2011:

How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13	14
R	M	C	F	0	6	0	3	J	T	4	K	7	0
Product Series		Size	Power	Tolerance		Packaging				Resistance Value			
RMCF	Thick Film Chip Resistors	0201	0.050W	Code	Tol	Code	Description	Size	Quantity	Four characters with the multiplier used as the decimal holder.			
		0402	0.063W	F	1%	T	7" Reel Paper or Embossed	0201, 0402	10,000	0.1 ohm = R100			
		0603	0.100W	J	5%	G		10" Reel Paper or Embossed	0603, 0805, 1206	5,000	4.75 ohm = 4R75		
		0805	0.125W			B	Bulk	1210, 2010, 2512	4,000	10.2 Kohm = 10K2			
		1206	0.250W					0201	15,000	1 Mohm = 1M00			
		1210	0.330W					0603, 0805, 1206	10,000	Zero ohm jumper = 0R00			
		2010	0.750W					0603, 0805, 1206	1,000				
		2512	1.000W										