


## Thick Film Chip Resistors, Military/Established Reliability MIL-PRF-55342 Qualified, Type RM



HALOGEN  
**FREE**

### FEATURES

- Fully conforms to the requirements of MIL-PRF-55342
- Established reliability - verified failure rate; M, P, R, S and T levels
- Operating temperature range is - 55 °C to + 150 °C
- 100 % group A screening per MIL-PRF-55342
- Termination style B - tin/lead wraparound over nickel barrier
- For MIL-PRF-32159 zero ohm jumpers, see Vishay Dale's RCWPM Jumper (Military M32159) datasheet
- Halogen-free according to IEC 61249-2-21 definition

### MECHANICAL SPECIFICATIONS

Resistive Element	Ruthenium oxide
Encapsulation	Epoxy
Substrate	96 % alumina
Termination	Solder-coated nickel barrier
Solder Finish	Tin/lead solder alloy

### STANDARD ELECTRICAL SPECIFICATIONS

VISHAY DALE MODEL	MIL-PRF-55342 STYLE	MIL SPEC. SHEET	TERM.	POWER RATING $P_{70\text{ }^{\circ}\text{C}}$ W	MAX. WORKING VOLTAGE <sup>(1)</sup> V	TEMPERATURE COEFFICIENT <sup>(2)</sup> $\pm$ ppm/°C	TOLERANCE $\pm$ %	RESISTANCE RANGE $\Omega$
RCWPM-0502	RM0502	01	B	0.05	40	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 9.1 10 to 22M
RCWPM-550	RM0505	02	B	0.125	40	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 9.1 10 to 22M
RCWPM-5100	RM1005	03	B	0.20	75	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-5150	RM1505	04	B	0.15	125	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-7225	RM2208	05	B	0.225	175	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-575	RM0705	06	B	0.15	50	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-1206	RM1206	07	B	0.25	100	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-2010	RM2010	08	B	0.80	150	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-2512	RM2512	09	B	1.0	200	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-1100	RM1010	10	B	0.50	75	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-0402	RM0402	11	B	0.05	30	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 9.1 10 to 22M
RCWPM-0603	RM0603	12	B	0.10	50	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 5.1 5.6 to 22M
RCWPM-0302	RM0302	13	B	0.04	15	300 100, 300	2, 5, 10 1, 2, 5, 10	1 to 9.1 10 to 22M

### Notes

- DSCC has created a series of drawings to support the need for 0201-sized product. Vishay Dale is listed as a resource on this drawing as follows:

DSCC DRAWING NUMBER	VISHAY DALE MODEL	TERM.	POWER RATING $P_{70\text{ }^{\circ}\text{C}}$ W	RES. RANGE $\Omega$	RES. TOL. $\pm$ %	TEMP. COEF. $\pm$ ppm/°C	MAX. WORKING VOLTAGE <sup>(1)</sup> V
07009	RCWP-0201	B	0.05	47 to 1M 10 to 1M	$\pm$ 1; $\pm$ 5	100 200	30

This drawing can be viewed at: [www.dscc.dla.mil/Programs/MilSpec/listDwgs.asp?DocType=DSCCdwg](http://www.dscc.dla.mil/Programs/MilSpec/listDwgs.asp?DocType=DSCCdwg)

<sup>(1)</sup> Continuous working voltage shall be  $\sqrt{P \times R}$  or maximum working voltage, whichever is less

<sup>(2)</sup> Characteristics: K =  $\pm$  100 ppm/°C; M =  $\pm$  300 ppm/°C



# RCWPM (Military M/D55342)

Thick Film Chip Resistors, Military/Established Reliability  
MIL-PRF-55342 Qualified, Type RM

Vishay Dale

GLOBAL PART NUMBER INFORMATION																	
New Global Part Numbering: M55342M02B10E0RWB (preferred part number format)																	
M	5	5	3	4	2	M	0	2	B	1	0	E	0	R	W	B	
<b>MIL STYLE</b>	<b>CHARACTERISTICS</b>	<b>SPEC. SHEET</b>	<b>TERMINATION STYLE</b>	<b>VALUE AND TOLERANCE</b>	<b>FAILURE RATE</b>	<b>PACKAGING (1)</b>		<b>SPECIAL</b>									
<b>D55342</b> applies to Style 07 (RM1206) only.  <b>M55342</b> applies to all other styles.	<b>K</b> = 100 ppm <b>M</b> = 300 ppm	(see Standard Electrical Specifications table)	<b>B</b> = Pre-tinned nickel barrier, wraparound	(see Tolerance and Multipliers table)	<b>C</b> = Non-ER <b>M</b> = 1.0 %/1000 h <b>P</b> = 0.1 %/1000 h <b>R</b> = 0.01 %/1000 h <b>S</b> = 0.001 %/1000 h <b>T</b> = Space level	<b>TP</b> = Tin/lead, T/R (full) <b>TN</b> = Tin/lead, T/R (full), w/ESD <b>UL</b> = Tin/lead, T/R single lot date code <b>S3</b> = Tin/lead, T/R (1000 pieces) <b>SV</b> = Tin/lead, T/R (1000 pieces), w/ESD <b>WB</b> = Tin/lead, tray <b>WA</b> = Tin/lead, tray, w/ESD <b>WL</b> = Tin/lead, tray, single lot date code <b>S2</b> = Tin/lead, T/R (500 pieces) <b>SU</b> = Tin/lead, T/R (500 pieces), w/ESD <b>S6</b> = Tin/lead, T/R (300 pieces) <b>ST</b> = Tin/lead, T/R (300 pieces), w/ESD		Blank = Standard (Dash Number) (Up to 1 digits) <b>T</b> = Space level (-98)									
Historical Part Numbering: M55342M02B10E0R (will continue to be accepted)																	
M55342	M	02	B	10E0	R	WB											
MIL STYLE	CHARACTERISTICS	SPEC. SHEET	TERMINATION STYLE	VALUE AND TOLERANCE	FAILURE RATE	PACKAGING CODE											

**Note**

(1) Products with space level failure rates are only offered in packaging codes with ESD overpack and labeling. For all other failure rates, the ESD pack codes are an optional type of packaging.


RESISTANCE TOLERANCE AND MULTIPLIERS																						
TOLERANCE				MULTIPLIER	VALUE RANGE (Ω)																	
± 1 %	± 2 %	± 5 %	± 10 %																			
D	G	J	M	1	1 to 9xx																	
E	H	K	N	1000	1K to 9xxK																	
F	T	L	P	1 000 000	1M to 22M																	
Examples: <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">11D3 = 11.3 Ω ± 1 %</td> <td style="width: 33%;">15J0 = 15 Ω ± 5 %</td> </tr> <tr> <td>10E0 = 10 kΩ ± 1 %</td> <td>10K0 = 10 kΩ ± 5 %</td> </tr> <tr> <td>332D = 332 Ω ± 1 %</td> <td>560K = 560 kΩ ± 5 %</td> </tr> <tr> <td>2F21 = 2.21 MΩ ± 1 %</td> <td>8L20 = 8.2 MΩ ± 5 %</td> </tr> <tr> <td>51G0 = 51 Ω ± 2 %</td> <td>10M0 = 10 Ω ± 10 %</td> </tr> <tr> <td>10H0 = 10 kΩ ± 2 %</td> <td>10N0 = 10 kΩ ± 10 %</td> </tr> <tr> <td>33H0 = 33 kΩ ± 2 %</td> <td>2P70 = 2.7 MΩ ± 10 %</td> </tr> <tr> <td>22T0 = 22 MΩ ± 2 %</td> <td>8P20 = 8.2 MΩ ± 10 %</td> </tr> </table>							11D3 = 11.3 Ω ± 1 %	15J0 = 15 Ω ± 5 %	10E0 = 10 kΩ ± 1 %	10K0 = 10 kΩ ± 5 %	332D = 332 Ω ± 1 %	560K = 560 kΩ ± 5 %	2F21 = 2.21 MΩ ± 1 %	8L20 = 8.2 MΩ ± 5 %	51G0 = 51 Ω ± 2 %	10M0 = 10 Ω ± 10 %	10H0 = 10 kΩ ± 2 %	10N0 = 10 kΩ ± 10 %	33H0 = 33 kΩ ± 2 %	2P70 = 2.7 MΩ ± 10 %	22T0 = 22 MΩ ± 2 %	8P20 = 8.2 MΩ ± 10 %
11D3 = 11.3 Ω ± 1 %	15J0 = 15 Ω ± 5 %																					
10E0 = 10 kΩ ± 1 %	10K0 = 10 kΩ ± 5 %																					
332D = 332 Ω ± 1 %	560K = 560 kΩ ± 5 %																					
2F21 = 2.21 MΩ ± 1 %	8L20 = 8.2 MΩ ± 5 %																					
51G0 = 51 Ω ± 2 %	10M0 = 10 Ω ± 10 %																					
10H0 = 10 kΩ ± 2 %	10N0 = 10 kΩ ± 10 %																					
33H0 = 33 kΩ ± 2 %	2P70 = 2.7 MΩ ± 10 %																					
22T0 = 22 MΩ ± 2 %	8P20 = 8.2 MΩ ± 10 %																					

# RCWPM (Military M/D55342)



Vishay Dale Thick Film Chip Resistors, Military/Established Reliability  
MIL-PRF-55342 Qualified, Type RM

DIMENSIONS in inches (millimeters)							
VISHAY DALE MODEL	MIL-PRF-55342 STYLE	MIL SPEC. SHEET	A (LENGTH)	B (WIDTH)	C (HEIGHT)	D (TOP TERM)	E (BOTTOM TERM)
RCWPM-0502	RM0502	01	0.055 ± 0.005 (1.40 ± 0.13)	0.023 ± 0.003 (0.58 ± 0.08)	0.015 ± 0.003 (0.38 ± 0.08)	0.010 ± 0.005 (0.25 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-550	RM0505	02	0.055 ± 0.005 (1.40 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.010 ± 0.005 (0.25 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-5100	RM1005	03	0.105 ± 0.005 (2.67 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-5150	RM1505	04	0.155 ± 0.005 (3.94 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-7225	RM2208	05	0.230 ± 0.005 (5.84 ± 0.13)	0.075 ± 0.005 (1.91 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)
RCWPM-575	RM0705	06	0.080 ± 0.005 (2.03 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.016 ± 0.008 (0.41 ± 0.20)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-1206	RM1206	07	0.125 ± 0.005 (3.18 ± 0.13)	0.063 ± 0.005 (1.60 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-2010	RM2010	08	0.197 ± 0.006 (5.00 ± 0.15)	0.098 ± 0.005 (2.49 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)
RCWPM-2512	RM2512	09	0.250 ± 0.006 (6.35 ± 0.15)	0.124 ± 0.005 (3.15 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)
RCWPM-1100	RM1010	10	0.105 ± 0.005 (2.67 ± 0.13)	0.100 ± 0.005 (2.54 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-0402	RM0402	11	0.039 ± 0.003 (0.99 ± 0.08)	0.020 ± 0.003 (0.51 ± 0.08)	0.013 ± 0.003 (0.33 ± 0.08)	0.010 ± 0.005 (0.25 ± 0.13)	0.010 ± 0.005 (0.25 ± 0.13)
RCWPM-0603	RM0603	12	0.063 ± 0.005 (1.60 ± 0.13)	0.032 ± 0.005 (0.81 ± 0.13)	0.018 ± 0.005 (0.46 ± 0.13)	0.012 ± 0.005 (0.30 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-0302	RM0302	13	0.034 ± 0.004 (0.86 ± 0.10)	0.021 ± 0.003 (0.53 ± 0.08)	0.013 ± 0.003 (0.33 ± 0.08)	0.007 ± 0.005 (0.18 ± 0.13)	0.008 ± 0.005 (0.20 ± 0.13)
RCWP-0201			0.024 ± 0.002 (0.61 ± 0.05)	0.012 ± 0.002 (0.30 ± 0.05)	0.009 ± 0.002 (0.23 ± 0.05)	0.006 ± 0.003 (0.15 ± 0.08)	0.006 + 0.002 - 0.004 (0.15 + 0.05 - 0.10)

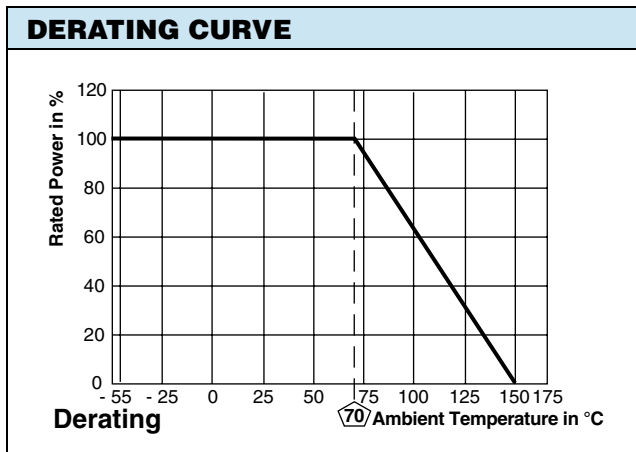

**CAGE CODE: 91637 and SH903**



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.