

Metal Oxide Resistors, Special Purpose High Power, Ultra High Value



FEATURES

- Wattages to 400 W at + 25 °C
- Derated to 0 at + 230 °C
- Voltage testing to 100 kV
- Tolerances: ± 1 %, ± 2 %, ± 5 %, ± 10 %
- Two terminal styles, Style 3 - Tab Terminal and Style 4 - Ferrule Terminal
- ± 200 ppm/°C and ± 100 ppm/°C available, measured between + 25 °C and + 125 °C
- Coating: Blue flameproof

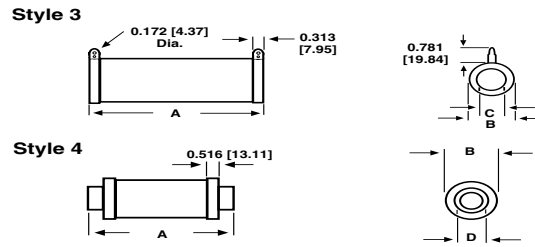
STANDARD ELECTRICAL SPECIFICATIONS				
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25\text{ °C}}$ W	MAXIMUM WORKING VOLTAGE ⁽¹⁾ V	RESISTANCE RANGE Ω
RJU040	RJU-40	40	25K	1K to 1G
RJU050	RJU-50	50	33K	1K to 1G
RJU070	RJU-70	70	40K	1K to 1G
RJU095	RJU-95	95	35K	1K to 1G
RJU095..1	RJU-95-1	95	35K	1K to 1G
RJU140	RJU-140	140	65K	1K to 1G
RJU140..1	RJU-140-1	140	65K	1K to 1G
RJU275	RJU-275	275	90K	100K to 1G
RJU275..1	RJU-275-1	275	90K	100K to 1G
RJU150	RJU-150	150	40K	100K to 1G
RJU150..1	RJU-150-1	150	40K	100K to 1G
RJU400	RJU-400	400	125K	100K to 1G
RJU400..1	RJU-400-1	400	125K	100K to 1G

Notes

- All resistance values are calibrated at 100 V_{DC}. Calibration at other voltages upon request.
- ⁽¹⁾ Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.

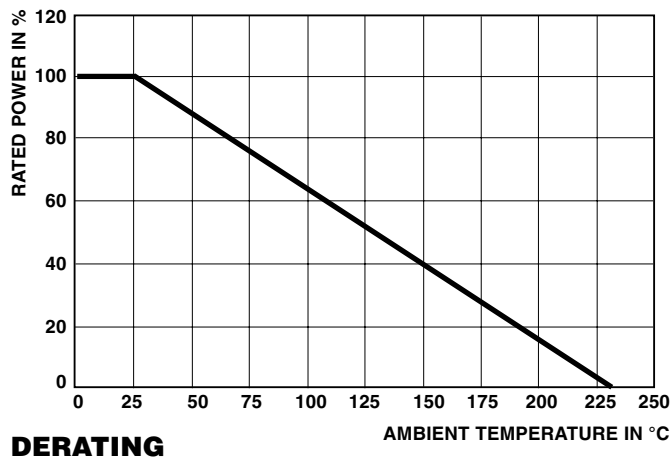
MARKING	
	<ul style="list-style-type: none"> - DALE - Model - Value - Tolerance - Date code

GLOBAL PART NUMBER INFORMATION																	
New Global Part Numbering: RJU0952M50KKF071 (preferred part numbering format)																	
R	J	U	0	9	5	2	M	5	0	K	K	F	0	7	1		
GLOBAL MODEL (see Standard Electrical Specification Table)	RESISTANCE VALUE K = kΩ M = MΩ G = GΩ 1K00 = 1.0 kΩ 10M0 = 10 MΩ 1G00 = 1.0 GΩ		TOLERANCE CODE F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 %		TEMP. COEFFICIENT K = 100 ppm N = 200 ppm	PACKAGING E07 = Lead (Pb)-free, Foam F07 = Tin/Lead, Foam	SPECIAL Blank = Standard (Dash Number) (up to 3 digits) From 1 to 999 as applicable 1 = Ferrule Terminal										
Historical Part Number: RJU-95-12M50KK (will continue to be accepted)																	
RJU-95-1	2M50	K	K	F07													
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	TEMP. COEFFICIENT	PACKAGING													

DIMENSIONS in inches (millimeters)


GLOBAL MODEL	STYLE	A	B (1)	C	D
RJU040	3	4.500 (114.30)	0.750 (19.05)	0.500 (12.70)	N/A
RJU050	3	6.000 (152.40)	0.750 (19.05)	0.500 (12.70)	N/A
RJU070	3	8.000 (203.20)	0.750 (19.05)	0.500 (12.70)	N/A
RJU095	3	6.500 (165.10)	1.130 (28.70)	0.750 (19.05)	N/A
RJU095..1	4	7.690 (195.33)	1.130 (28.70)	N/A	0.812 (20.62)
RJU140	3	10.500 (266.70)	1.130 (28.70)	0.750 (19.05)	N/A
RJU140..1	4	11.690 (296.93)	1.130 (28.70)	N/A	0.812 (20.62)
RJU275	3	14.500 (368.30)	1.500 (38.10)	1.130 (28.70)	N/A
RJU275..1	4	15.690 (398.53)	1.500 (38.10)	N/A	1.140 (28.96)
RJU150	3	6.500 (165.10)	2.000 (50.80)	1.560 (39.62)	N/A
RJU150..1	4	7.690 (195.33)	2.000 (50.80)	N/A	1.140 (28.96)
RJU400	3	18.500 (469.90)	2.000 (50.80)	1.560 (39.62)	N/A
RJU400..1	4	19.690 (500.13)	2.000 (50.80)	N/A	1.140 (28.96)

Note

 (1) Dimensional tolerances are ± 0.016 (0.406 mm) or $\pm 1\%$, whichever is greater.




Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.