

SMD HIGH-FREQUENCY CRYSTAL UNIT

MA-406 / 505 / 506


Product number (please refer to page 1)

Q22MA406XXXXX00

Q22MA505XXXXX00

Q22MA506XXXXX00

- Excellent environment capability.
- Cover a wide frequency range, from 4 MHz to 64 MHz.
- Available for lead (Pb)-free soldering.
- Available for lead (Pb)-free terminal.

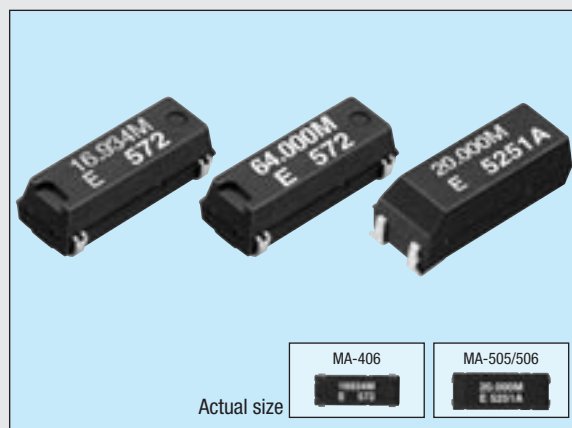

Specifications (characteristics)

Item	Symbol	Specifications	Remarks
Nominal frequency range	f	4.000 MHz to 29.999 MHz *1	Fundamental mode
		30.000 MHz to 64.000 MHz *2	3rd overtone mode
Temperature range	Storage temperature	TSTG	-55 °C to +125 °C
	Operating temperature	TOPR	-20 °C to +70 °C
Recommended drive level	DL	10 μW to 100 μW	Stored as bare product after unpacking
Frequency tolerance (standard)	Δf/f	±50 x 10 ⁻⁶	Ta = +25 °C ±3 °C
Frequency temperature characteristics (standard)		Under 5.5 MHz : ±50 x 10 ⁻⁶	-20 °C to +70 °C
		Over 5.5 MHz : ±30 x 10 ⁻⁶	
Load capacitance	CL	Fundamental: 10 pF to ∞	Please specify
		Over tone: 5 pF to ∞	
Series resistance	R1	As per below table	-20 °C to +70 °C , DL = 100 μW
Shunt capacitance	Co	5 pF Max.	
Insulation resistance	IR	500 MΩ Min.	
Aging	fa	±5 x 10 ⁻⁶ / year	Ta = +25 °C ±3 °C , first year
Shock resistance	S.R.	±10 x 10 ⁻⁶ Max.	Three drops on a hard board from 750 mm or excitation test with 29400 m/s ² x 0.3 ms x 1/2 sine wave x 3 directions

*1 4.0 MHz ≤ f < 5.5 MHz : See "Available frequencies form 4.0 MHz to less than 5.5 MHz". 8.0 MHz < f < 8.2 MHz: Unavailable.
 *2 26.000 MHz ≤ f < 30.000 MHz :please contact us for inquiries for 3rd overtone mode.

Available frequency from 4.0 MHz to less than 5.5 MHz

4.000	4.032	4.096	4.190	4.194304	4.433619	4.500	4.800	4.842673	4.9152
-------	-------	-------	-------	----------	----------	-------	-------	----------	--------

Series resistance

Frequency (MHz)	4.0 ≤ f < 5.5	5.5 ≤ f < 6.0	6.0 ≤ f < 10.0	10.0 ≤ f < 16.0	12.0 ≤ f < 16.0	16.0 ≤ f < 30.0	26.0 ≤ f ≤ 36.0	36.0 < f ≤ 64.0
Series resistance (Ω)	150 Ω Max.	100 Ω Max.	80 Ω Max.	60 Ω Max.	50 Ω Max.	40 Ω Max.	100 Ω Max.	80 Ω Max.
Oscillation mode	Fundamental mode						3rd overtone mode	

External dimensions

(Unit: mm)

● MA-406

Do not connect #2 and #3 to external device.
Metal may be exposed on the top or bottom of this product. This won't affect any quality, reliability or electrical spec.

● MA-505/506

Do not connect #2 and #3 of MA-506 to external device.
The first digit of lot No. means: 5XXXX → MA-505
6XXXX → MA-506

Recommended soldering pattern

(Unit: mm)

● MA-406

● MA-505

● MA-506