

## ICC-MT 0,5-1,0 BA

Order No.: 3190603

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3190603>

Module male contact, is inserted into the ICC connector shell after the conductor has been crimped, for conductors from 0.5-1.0 mm<sup>2</sup>, ribbon contact

Commercial data	
GTIN (EAN)	4017918100582
sales group	E192
Pack	4000 pcs.
Customs tariff	85369010
Weight/Piece	0.00098 KG
Catalog page information	Page 497 (CC-2009)

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


### Technical data

Technical data	
Nominal current	12 A (with 1 mm <sup>2</sup> conductor cross section)
Conductor cross section stranded min.	0.5 mm <sup>2</sup>
Max. conductor cross section, stranded	1 mm <sup>2</sup>
Connection data	
Core diameter including insulation	1.4 mm ... 2.31 mm
Stripping length of individual wires	3.5 mm

## Diagrams/Drawings

Dimensioned drawing

---

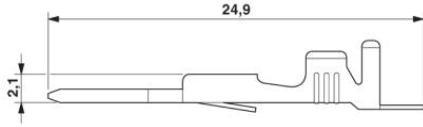

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;