


used for: D-SUB



No. of pos.	A	B	C	D	E	ØF	PART NO.
9	32.9	25.0	39.5	41.8	16.3	11.0	165X13369XE
15	41.2	33.3	45.5	47.8	16.3	11.0	165X13379XE
25	54.9	47.0	52.5	54.8	16.3	12.0	165X13389XE
37	71.4	63.5	55.0	57.8	18.7	15.0	165X13399XE
50	69.0	61.1	55.0	57.8	19.5	14.0	165X13409XE

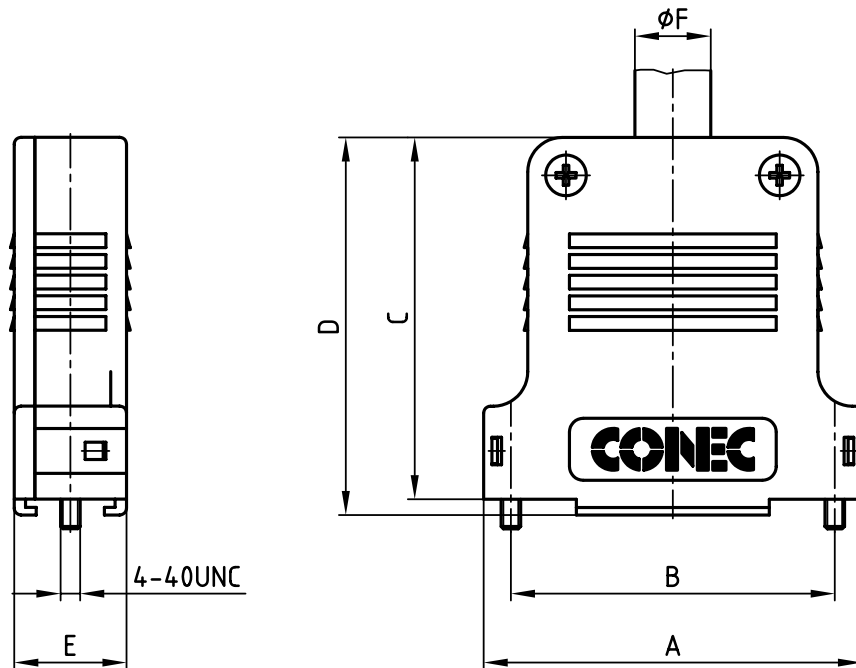

HOOD ASSEMBLY CONSISTS OF:

- 1 x HOOD + COVER: PBT UL 94 V-0; BLACK
- 1 x PRESS INSERT: PBT UL 94 V-0; BLACK
- 2 x JACKSCREWS: BRASS; NICKEL PLATED
- 2 x SCREW FOR STRAIN RELIEF: STEEL; ZINC PLATED
- 2 x COVER SCREWS: STEEL; NICKEL PLATED
- 1 x STRAIN RELIEF: STEEL; NICKEL PLATED

TECHNICAL DATA:

- TEMPERATURE RANGE: -33°C to +90°C

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: _____ TITLE: _____

COMPANY NAME: _____

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

tolerance				scale: 1:1	
		dim. in mm		material: SEE DRAWING	
	2006	date	name	PLASTIC HOOD 9-50pos. WITH STRAIGHT CABLE EXIT big space inside	
	drawn	06.02.	Lehmenkühler		
	appd.	06.02.	Mickenbecker		
	norm				
	d-old			dwg no: AutoCAD 2004 DIN-A 4 sh: 1/1	
a	Origin			16K1A1736	
rev.	description	date	name	part no: SEE TABLE	

