

SACC-M12-SCO PLUG

Order No.: 1551493

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1551493>

M12-SPEEDCON housing screw connection for M12 male inserts, with flat gasket, for all Speedcon-compatible THR and wave soldering contact carriers



Commercial data	
GTIN (EAN)	4046356153645
sales group	D125
Pack	60 pcs.
Customs tariff	85389099
Weight/Piece	0.006043 KG
Catalog page information	Page 110 (NTK-2010)

Product notes

WEEE/RoHS-compliant since:
04/13/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------


General characteristics

Material	Zinc die-cast (nickel-plated)
----------	-------------------------------

Sealing material	NBR
Mounting type	M12 x 1

Diagrams/Drawings

Dimensioned drawing

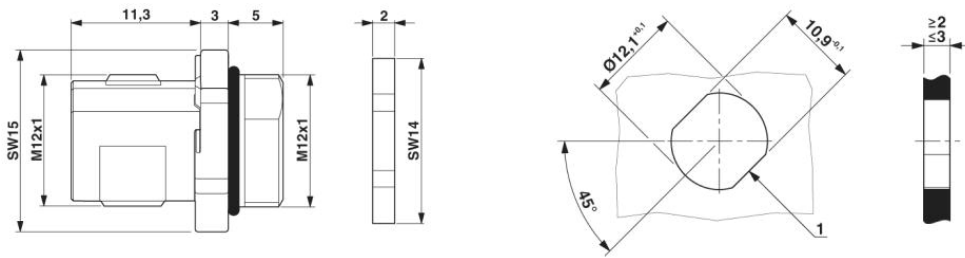

Housing cutout for M12 fastening thread,
mounting panel with feed-through hole
(alternative with surface as protection
against rotation)

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;