

## Circular Plastic Connector Sealing Accessories (Continued)

### Sealing Caps – for Receptacles only

Sealing caps are used to protect exposed contacts of unmated receptacles.


#### Material and Finish:

**Cap**—Thermoplastic, heat stabilized, fire resistant, self-extinguishing, 94V-1 rated, black

**Sealing Gasket**—Neoprene, black

**Bead Chain**—Steel, nickel plated

**Bead Chain Coupling**—Brass, plated nickel

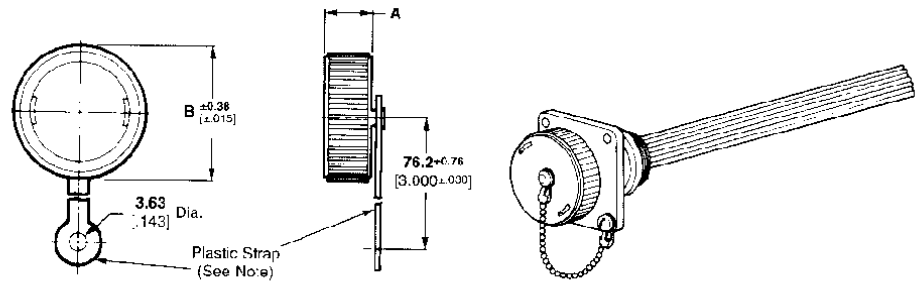


Shell Size	Series	Dimensions		Plastic Strap Part No.	Metal Bead Chain Part No.
		A	B		
11	1 & 2	9.14 .360	23.55 .927	206903-1	208800-1
13	1	9.14 .360	26.80 1.055	211870-1	213485-1
17	1,2,& 3	9.14 .360	32.89 1.295	207445-1	208652-1
23	1, 3, & 4	11.68	43.89	207446-1	208680-1
	2	.460	1.728	207446-2	208680-2

### Cable Entry Seals

#### Heat Shrinkable Sealing Boots

Cable entry seals are used with jacketed cable to provide an environmentally sealed wire-to-connector system. They can be used with either plugs or receptacles.

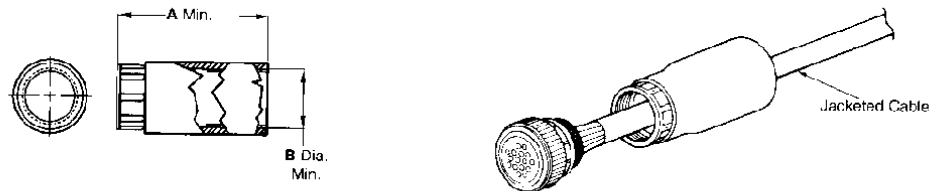

### Thick Wall Boots

#### Material:

**Internal Sleeve**—Nylon

**Outer Tubing**—Polyolefin

Shell Size	Dimensions		Expanded Wall Thickness	Sealing Range (Dia.)	Max. Recovered Wall Thickness	Part No.
	A	B				
11	63.50 2.500	15.88 .625	2.03 .080 Ref.	6.60 - 15.25 .260 - .600	25.91 1.20 Ref.	54010-1
13	63.50 2.500	19.68 .775	2.03 .080 Ref.	7.62 - 18.42 .300 - .725	25.91 1.20 Ref.	54123-1
17	63.50 2.500	24.76 .975	2.03 .080 Ref.	10.16 - 22.22 .400 - .875	25.91 1.20 Ref.	54011-1
23	76.20 3.000	31.75 1.250	2.03 .080 Ref.	13.97 - 31.75 .550 - 1.250	25.91 1.20 Ref.	54012-1

### Thin Wall Boots

#### Material:



**Inter Sleeve**—Nylon

**Outer Tubing**—Polyolefin

**Expanded Wall Thickness**—  
0.51 [.020]

**Max. Recovered Wall Thickness**—  
10.16 [.400]

**Sealing Range**—6.35 [.250] -  
12.70 [.500]

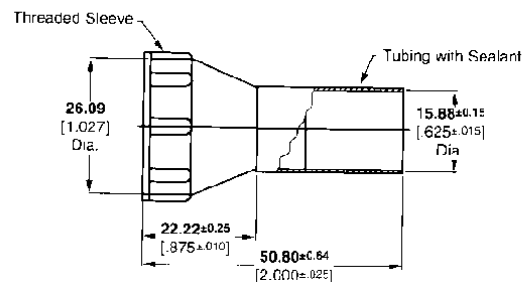

Shell Size 17  
Part No. 213933-1