


## ANTI-STATIC DUST CAPS



*Anti-Static Dust Caps* offer protection to Micro-D connectors for storage and handling. Molded in black thermoplastic LDPE, these caps meet the anti-static decay rate specified in MIL-PRF-81705D.

*UL 94-V0* rated, self-extinguishing


Layout	MWD Metal Shell Connectors					MWD Plastic Shell Connectors				
	Part Number	A Ref.		B Ref.		Part Number	A Ref.		B Ref.	
		In.	mm.	In.	mm.		In.	mm.	In.	mm.
9P	000-01-09-162	.390	9.91	.250	6.35	000-01-09-164	.350	8.89	.200	5.08
9S	000-01-09-163	.460	11.68	.320	8.13	000-01-09-165	.430	10.92	.280	7.11
15P	000-01-15-162	.540	13.72	.250	6.35	000-01-15-164	.500	12.70	.200	5.08
15S	000-01-15-163	.610	15.49	.320	8.13	000-01-15-165	.580	14.73	.280	7.11
21P	000-01-21-162	.670	17.02	.250	6.35	000-01-21-164	.650	16.51	.200	5.08
21S	000-01-21-163	.740	18.80	.320	8.13	000-01-21-165	.730	18.54	.280	7.11
25P	000-01-25-162	.770	19.56	.250	6.35	000-01-25-164	.750	19.05	.200	5.08
25S	000-01-25-163	.840	21.34	.320	8.13	000-01-25-165	.830	21.08	.280	7.11
31P	000-01-31-162	.920	23.37	.250	6.35	000-01-31-164	.900	22.86	.200	5.08
31S	000-01-31-163	1.010	25.65	.320	8.13	000-01-31-165	.980	24.89	.280	7.11
37P	000-01-37-162	1.090	27.69	.250	6.35	000-01-37-164	1.050	26.67	.200	5.08
37S	000-01-37-163	1.160	29.46	.320	8.13	000-01-37-165	1.130	28.70	.280	7.11
51P	000-01-51-162	1.040	26.42	.300	7.62	000-01-51-164	1.000	25.40	.250	6.35
51S	000-01-51-163	1.110	28.19	.360	9.14	000-01-51-165	1.080	27.43	.320	8.13
51-2P	000-01-51-172	1.440	36.58	.250	6.35	NOT AVAILABLE				
51-2S	000-01-51-173	1.510	38.35	.320	8.13	NOT AVAILABLE				
67P	000-01-67-162	1.840	46.74	.250	6.35	NOT AVAILABLE				
67S	000-01-67-163	1.910	48.51	.320	8.13	NOT AVAILABLE				
69P	000-01-69-162	1.340	34.04	.300	7.62	NOT AVAILABLE				
69S	000-01-69-163	1.410	35.81	.360	9.14	NOT AVAILABLE				
100P	000-01-00-162	1.440	36.58	.340	8.64	NOT AVAILABLE				
100S	000-01-00-163	1.510	38.35	.410	10.41	NOT AVAILABLE				

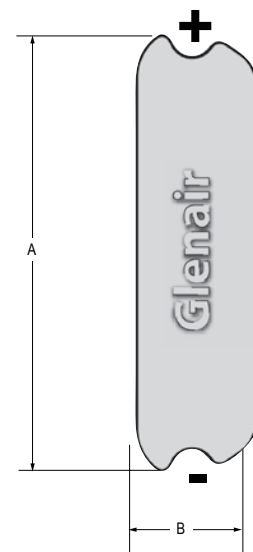

## INTERFACIAL SEALS FOR METAL SHELL MICRO-D SOCKET CONNECTORS



*Replacement Interfacial Seals* fit Micro-D metal shell socket connectors. These blue flourosilicone seals allow replacement of damaged seals.



Layout	Part Number	A Ref.		B Ref.	
		In.	mm.	In.	mm.
9S	000-01-09-132	.330	8.4	.180	4.6
15S	000-01-15-132	.480	12.2	.180	4.6
21S	000-01-21-132	.630	16.0	.180	4.6
25S	000-01-25-132	.730	18.5	.180	4.6
31S	000-01-31-132	.880	22.4	.180	4.6
37S	000-01-37-132	1.030	26.2	.180	4.6
51S	000-01-51-132	.976	24.8	.223	5.7
100S	000-01-00-132	1.386	35.2	.270	6.9