

DVI INTERFACES

DVI SERIES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?DVI

Insulator Material:

High Temperature Thermoplastic

Contact Material:

Phosphor Bronze

Shell Material:

Steel

Plating:

Gold on Contacts, Nickel on Shell, Tin on Tails

Operating Temp Range:

-55°C to +105°C

Current Rating:

3 A per contact

Voltage Rating:

40 VAC

Contact Resistance:

20 mΩ max

Minimum Cycles:

100

Packaging:

Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation are available upon request.

Mates with:
Industry Standard
DVI Cable Assemblies

Meets Digital Display
Working Group Single
Monitor Interface
Specifications

Hot
Pluggable


Selectively
Plated

Digital/Analog
or Digital

Alignment
Pin

#4-40
Threaded
Panel
Mounts

Grounded
Board Locks

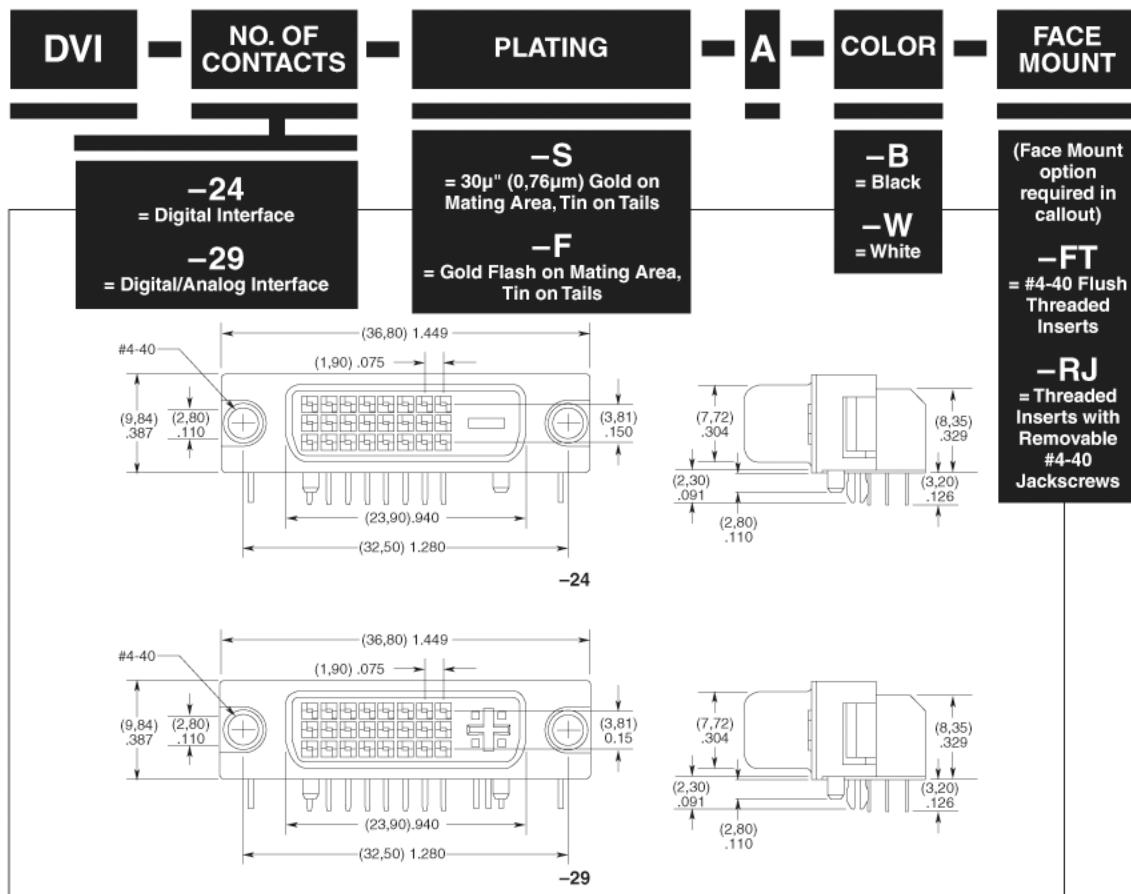

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047

SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299

SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-84477281

SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502

SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681

SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520

SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61

SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690

SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-61103766

SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432

SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113

SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC INDIA • Tel: 91 80 306 21 612 • Fax: 91 80 4152 8187

SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159

SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745