





HDMI-19-01-F-SM-PF



HDMI-29-01-S-SM

HDMI SERIES

HIGH SPEED I/O RECEPTACLES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?HDMI

Insulator Material:

High Temperature

Thermoplastic Contact Material:

Copper Alloy Shell Material:

Steel

Operating Temp Range:

-25°C to +85°C Plating:

Gold on Contacts, Nickel on Shell and Tin on Tails Current Rating:

1.2 A per contact Voltage Rating: 40 VAC

Contact Resistance:

 $30 \text{ m}\Omega$ Minimum Cycles:

Lead-Free Solderable:

RoHS Compliant:


ALSO



AVAILABLE

Edge Mount HDMI plug. Call Samtec for HDMIP Series specifications.

Mates with: HPLSP, HPDPI, **Industry Standard HDMI Cable Plugs**

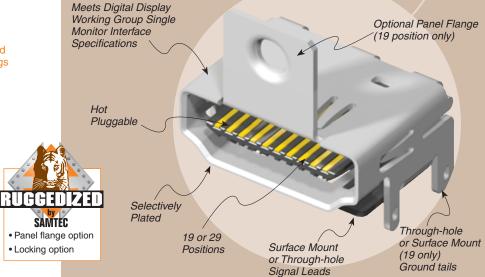

NO. OF **LEAD TAIL HDMI PLATING POSITIONS OPTION STYLE** -SM -01

-19 19 Positions / Mates with **HPXXX 5 Pairs**

-29

= 29 Positions / Mates with **HPXXX 8 Pairs**

(2.20)

.087

Through-hole **Ground Tails**

-02 Mount

= Surface **Ground Tails** (-19 only)

= Gold Flash on Mating Area, Tin on Tails S

= 30µ" (0,76µm) Gold on Mating Area Tin on Tails

Surface Mount (Signal Leads)

_TH


= Through-hole (Only available on HDMI-19-01-X-TH-PF-L)


(Leave Blank for no Panel Flange)

> -PF = Panel Flange

OPTIONS

= Locking Option (Only available on HDMI-19-01-X-TH-PF-L)

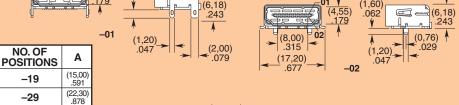

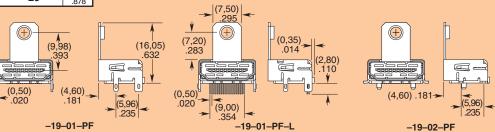

HDMI™ is a trademark of HDMI Licensing LLC.

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM