


# Switchcraft®

[Previous Page](#) | [Return to Index](#) | [Next Page](#)

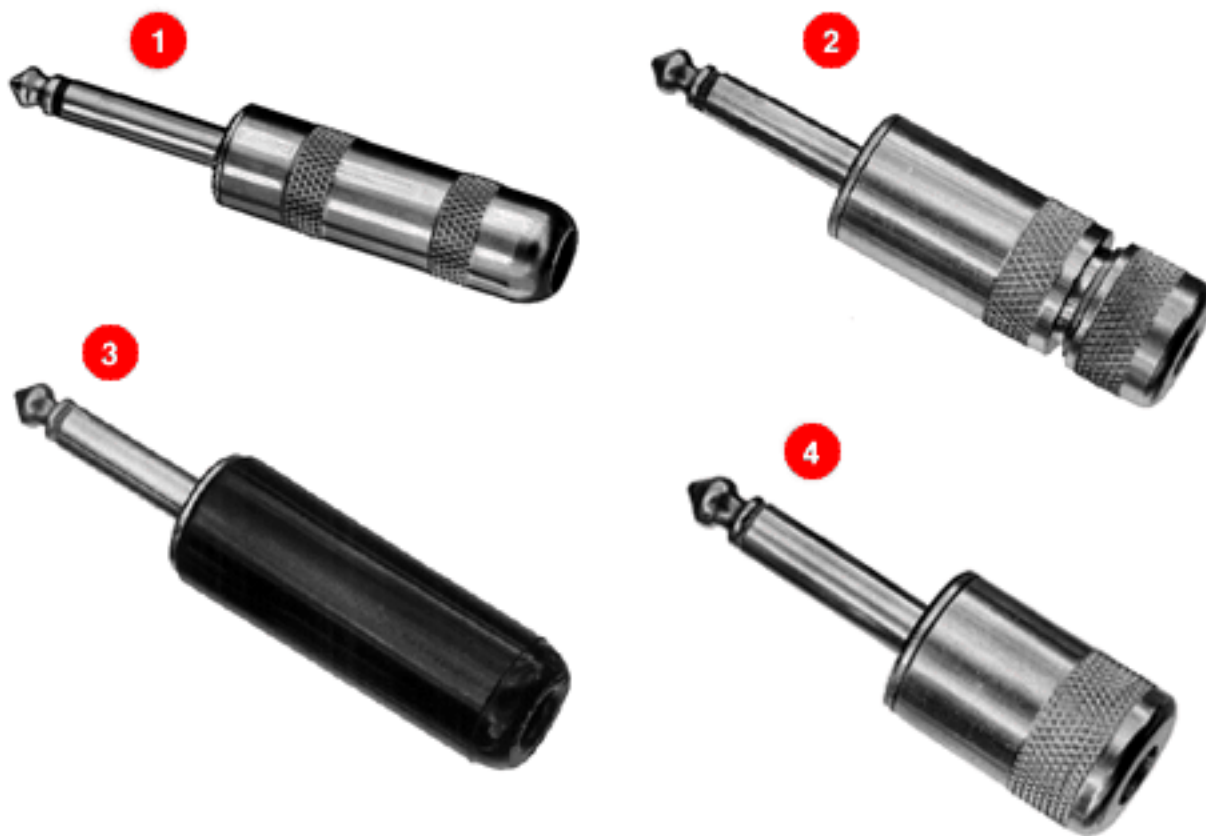

## 1/4" COMMERCIAL PHONE PLUGS

- 1. 2-CONDUCTOR/PLASTIC OR SHIELDED HANDLES Numbers 70, 184**
- 2. 2-CONDUCTOR/PLASTIC OR SHIELDED HANDLES Number 170, 181**
- 3. 2-CONDUCTOR/PLASTIC OR SHIELDED HANDLES Number 40**
- 4. 2-CONDUCTOR/PLASTIC OR SHIELDED HANDLES Number 160**

[click here to download a schematic drawing](#)

(you will need to have Adobe Acrobat installed on your system to do this)



Popular general purpose plug fits all standard jacks. Available in both 2- and 3-conductor types. Two-conductor plugs available with black or red molded plastic, or 3 different lengths of brass nickel-plated (shielded) handles. 3-conductor plugs on next page.

2-Conductor Special Military Plugs are also available.

## FEATURES

- \* 1-piece tip rod staked into tip terminal insures tightness of plug.
- \* All essential conducting members are brass with external parts nickel-plated.
- \* Terminal screws: broad-headed. In production quantities, screws may be eliminated and terminals hot-tinned for easier soldering of wire leads to terminals (special order).
- \* Screw terminals have grooves which accommodate 1 or 2 cord tips.
- \* Thermoplastic handle insert for greater insulation.
- \* Plugs accept up to .25 inch maximum diameter cable (parallel or shielded cable).

## SPECIFICATIONS

**Sleeve, Tip and Body:** Nickel-plated copper alloy.

**Terminals:** Solder lug: copper alloy, electro-tinned.

Screw: steel, tin-plated.

**Handles:** Shielded: Nickel-plated copper alloy.


Molded: black or red plastic.

Part Number	Terminals	Typical Mating Jack <sup>2</sup>	Handle	Handle Part Number
40			Black	M1001
703			Shielded	Handle: T10141 Insulator:

160	Screw (Replacement Screw Part No. P10013) 2 required	11 or Z15J	Shielded	Handle: T10451 Insulator: A10061 – Handle: T112311 Insulator: A10064 Handle:
2P1251			Without Handle	--
1701 182QB 182QBD			Shielded	Handle: T112311 Insulator: A10064
1843	Solder Lug & Cable Clamp		Shielded	Handle: T10141 Insulator: A11372
184L4			Shielded	T2322
<p><sup>1</sup> 2-piece shielded handle with built-in cable clamp for .25 inch diameter cable. Handles: Number T11231, handle; Number T11241, cap; see above for insulating tube; Number T1125, rubber washer.</p> <p><sup>2</sup> Other mating plugs are available.</p> <p><sup>3</sup> Handle has .380 inch (9.65mm) diameter hole to accommodate .375" diameter cable.</p> <p><sup>4</sup> Handle has .451 inch (11.51mm) diameter hole to accommodate larger diameter cables.</p>				

[Previous Page](#) | [Return to Index](#) | [Next Page](#)

**To search a category please click on the corresponding icon:**

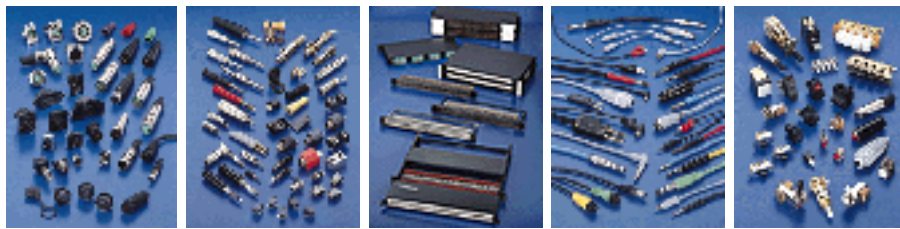

| [Connectors](#) | [Jacks and Plugs](#) |  
| [Patch Panels, Patch Kits & Jackfields](#) | [Cable Assemblies and Patch Cords](#) | [Switches](#) |

**All products shown are covered by Switchcraft's limited lifetime warranty.**

| [Switchcraft home](#) |  
[About Us](#) | [Products](#) | [What's New](#) | [Search](#) | [Contact Us](#)