
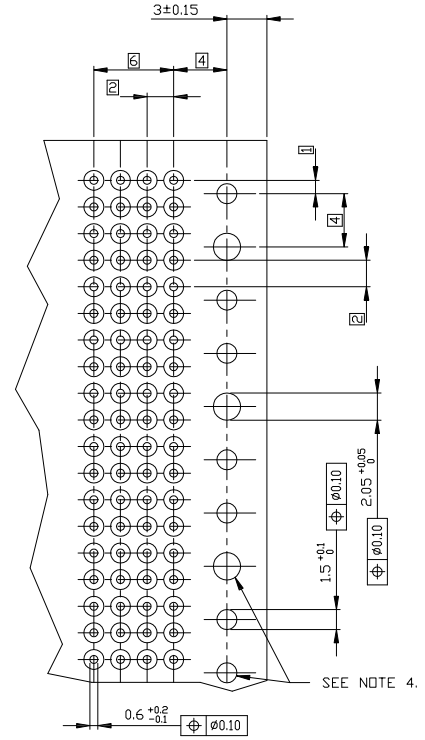
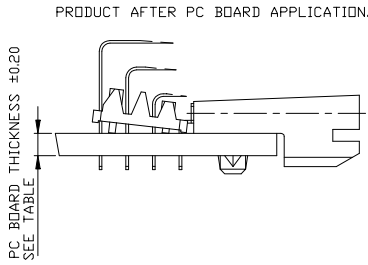
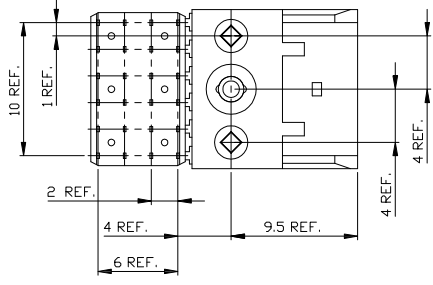
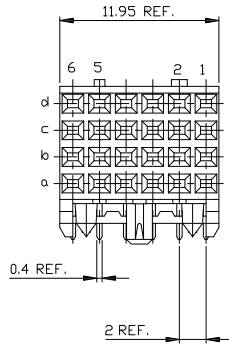


PC BOARD VERSIONS		
PRODUCTNR	PCB THICKNESS	DIM'A*
89035-X01	1,6	2,90
89035-X11	2,4	3,53
89035-X01LF	1,6	2,90
89035-X11LF	2,4	3,53

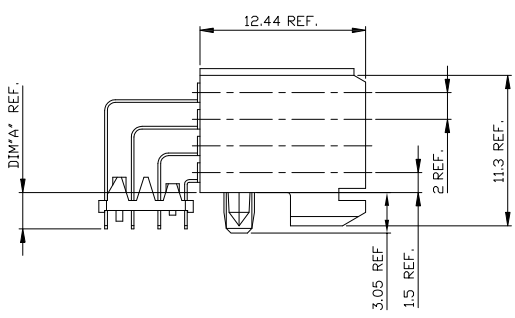







- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
  - FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR 2-8 μm PURE Sn FOR LEAD FREE.
  - INDICATED HOLES ARE UNPLATED.
  - PRODUCT MARKING: PART NUMBER & BATCH ID.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	FCI
lin   en   ngbr   date	linear	projection	www.fciconnection
H 306-001   04   14/09		title	RA FEMALE SIGNAL
J 306-001   04   11/23/06		product family	12 mm PRESS PEG
K 306-001   04   05/23/07	angles	scale	1:1
L 306-001   04   02/26/08	dr   h   bores   mgmt   921216	size	A2
M 306-001   04   06/06/09	dr   h   bores   mgmt   921221	sheet	1 of 3
G 08847   ULA   00530   APP   J   Wntjes   921222	CP   P   Schak   921222	revision	M   H   N
sheet	revision	1   2   3	
index	sheet		

All rights are reserved. Reproduction or translation without prior written permission is prohibited. Property of FCI Inc. © FCI Inc.

PC BOARD VERSIONS		
PRODUCTNR	PCB THICKNESS	DIM*A
89035-X02	1,6	2,90
89035-X12	2,4	3,53
89035-X02LF	1,6	2,90
89035-X12LF	2,4	3,53

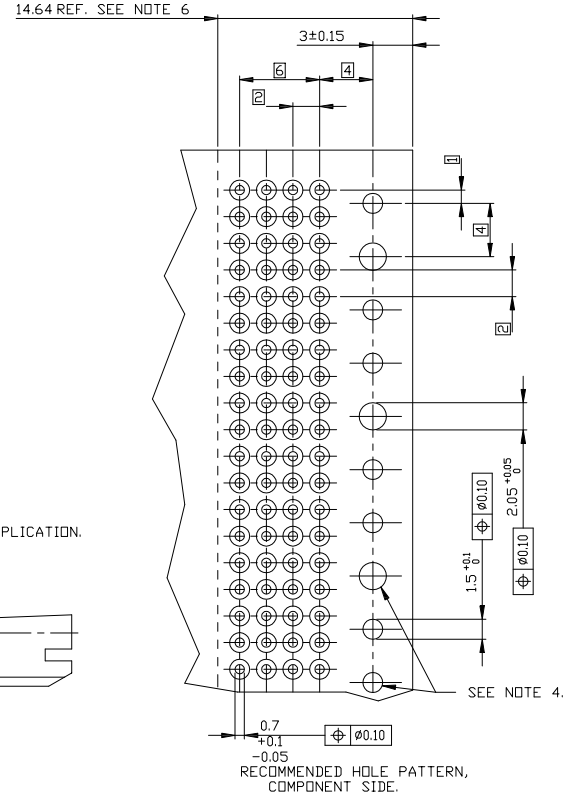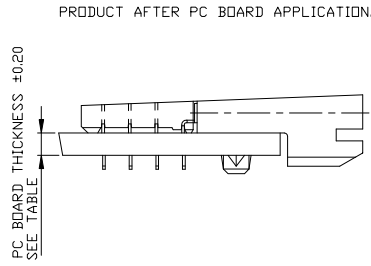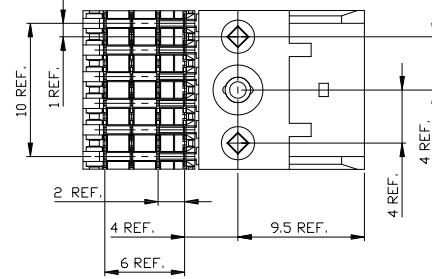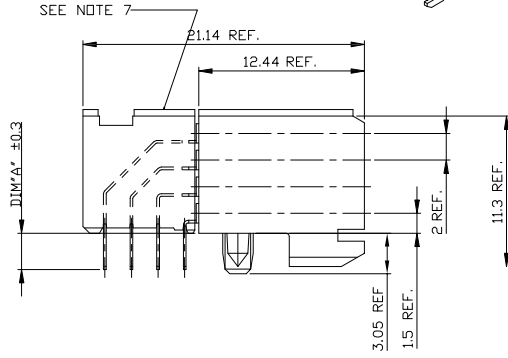

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - PLATING SOLDER TAILS 2-8  $\mu$ m SnPb 90-97 OR 2-8  $\mu$ m PURE Sn
  - INDICATED HOLES ARE UNPLATED.
  - PRODUCT MARKING: PARTNUMBER & BATCH ID.
  - SET BACK FOR PRESS BLOCK.
  - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.






PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	FCI
l	linear	projection	title RA FEMALE SIGNAL
x	angles	1	product family METRAL(tr)
	dr	mm	code 213
	engr	scale	size A2
	chr	51	89035
	app		sheet 2 of 2
sheet	revision		
index	sheet		

All rights strictly reserved. Reproduction or translation in any form without written permission of FCI is prohibited.

PC BOARD VERSIONS		
PRODUCT NR.	PCB THICKNESS	DIM "A"
89035-X03	1,6	2,90
89035-X13	2,4	3,53
89035-X03LF	1,6	2,90
89035-X13LF	2,4	3,53

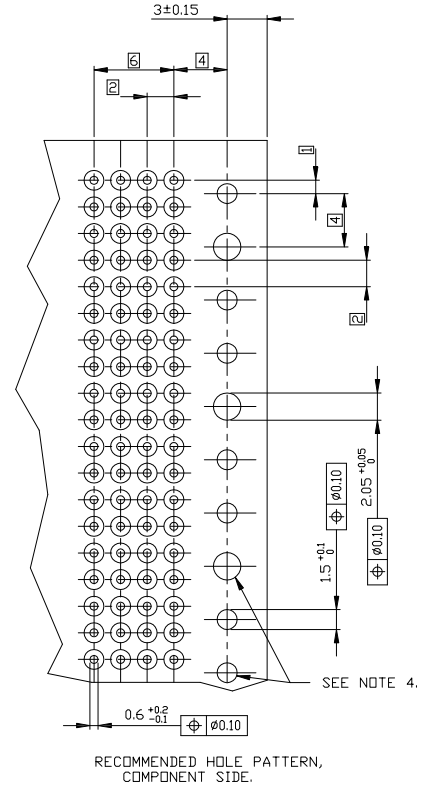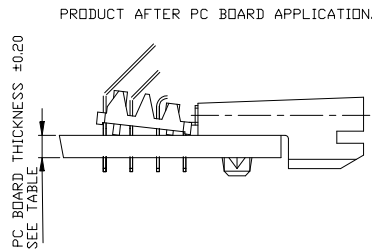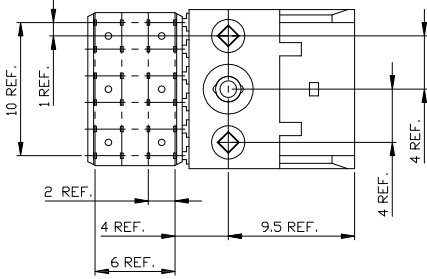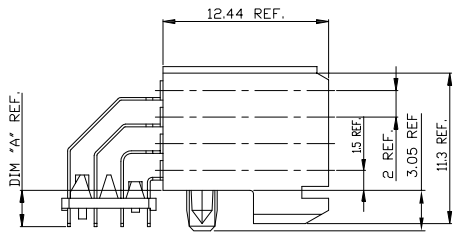

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn FOR LEAD FREE.
  - INDICATED HOLES ARE UNPLATED.
  - PRODUCT MARKING: PART NUMBER & BATCH ID.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-009
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
tr	ecn	ngdr	date	linear	projection	title	www.fciconnection
						RA FEMALE SIGNAL	
						12 mm PRESS PEG	
						product family METAL(tm)	code 213
						size	89035
						scale	sheet 3 of 3
						51	
sheet	revision						
index	sheet						