


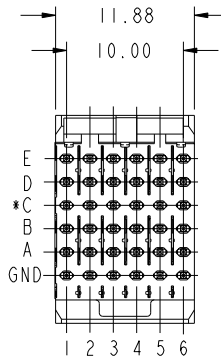


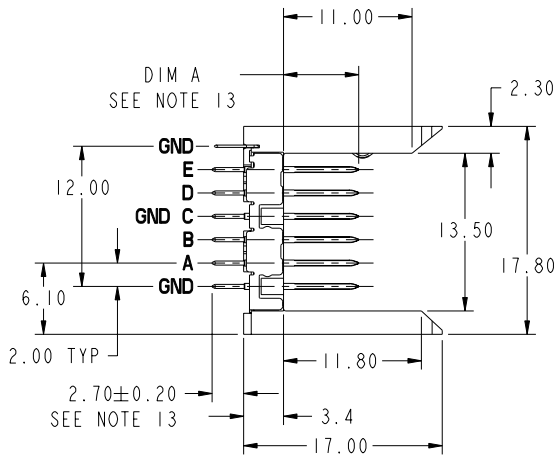

This document is the property of and embodies
 CONFIDENTIAL and PROPRIETARY information of FCI.
 No part of the information shown on this
 document may be used in any way or disclosed
 to others without the written consent of FCI.
 Copyright FCI.

| PRODUCT NUMBER | PLATING PERFORMANCE LEVEL | APPLICATION |
|----------------|---------------------------|-------------|
| 59566-1YYY | TELCORDIA CO | STANDARD |
| 59566-5YYY | TELCORDIA UE | |
| 59566-1YYLFF | TELCORDIA CO | LEAD FREE |
| 59566-5YYLFF | TELCORDIA UE | |

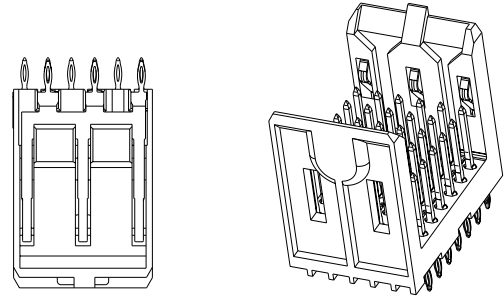


*** ROW C INFORMATION**
 ODD NUMBER COLUMNS WITHIN ROW C ARE COMMONED TO GROUND INTERNALLY WITHIN THE HOUSING. THE EVEN NUMBER COLUMNS WITHIN ROW C ARE NOT. FOR MAXIMUM PERFORMANCE IT IS RECOMMENDED THESE EVEN COLUMNS BE COMMONED TO GROUND WITHIN THE PCB, SEE NOTE 12

| | | | | | | | | | |
|----------------------|----------------|-----|------------|---------------------------------------|------------------------|----------|--|----------------------------|---|
| mat'l code SEE TABLE | | | | tolerances unless otherwise specified | | CUSTOMER | | FCI www.fciconnect.com | |
| ltr | ecn no. | dr | date | linear | 0.X ± 0.3 | COPY | | projection | title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD. |
| H | V06-0061 | DCH | 2006-07-07 | | 0.XX ± 0.13 | MM | | | |
| J | V06-0868 | DCH | 2006-08-29 | angles | .XXX ± .051 | scale | | product family METRAL 4000 | code 213 |
| K | V07-0174 | DCH | 2007-04-13 | | 0° ± 2° | 1:1 | | | |
| L | V07-0556 | DCH | 2007-08-22 | dr | C. DAILY 2002-01-15 | A | | size 59566 | sheet 1 of 4 |
| M | V07-0696 | HTB | 2007-11-28 | enr | J. VOLSTROF 2001-10-31 | | | | |
| - | - | - | - | chr | J. VOLSTROF 2002-01-15 | | | cage code 22526 | 4 |
| G | V06-0498 | DCH | 2006-05-23 | oppd | J. VOLSTROF 2002-01-15 | | | | |
| sheet index | revision sheet | M | M | M | M | | | | |

REV E - 2006-04-18


PDM: Rev:M STATUS:Released Printed: Dec 17, 2009

PRODUCT NUMBER
SEE SHEET 1

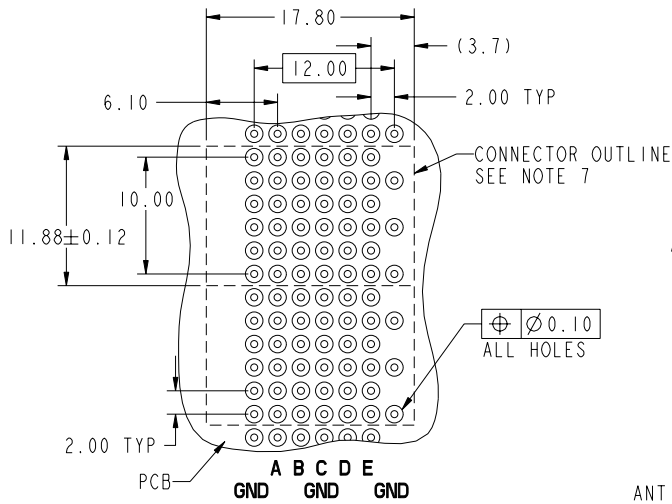

RECOMMENDED PCB HOLE PATTERN
(COMPONENT SIDE)
(SEE NOTE 11)

| PRESS-FIT HOLES | OPTION 1 | OPTION 2 |
|-----------------------------|----------------------|----------------------|
| HOLE DIAMETER AFTER PLATING | 0.45-0.55 | 0.48-0.57 |
| DRILLED HOLE | 0.60±0.02 | 0.60±0.02 |
| COPPER PLATING | 0.025 MIN-0.050 MAX. | 0.025 MIN-0.050 MAX. |
| SnPb PLATING | 0.005-0.015 | --- |

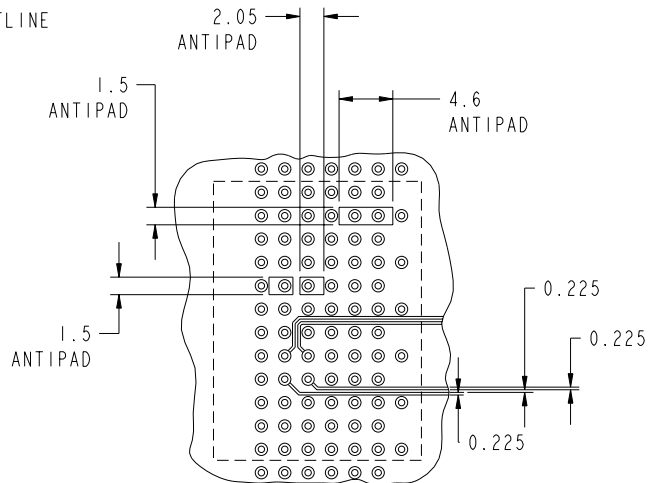

RECOMMENDED TRACK AND ANTIPAD DIMENSIONS
SCALE 2:1

| mat'l code SEE TABLE | | | | tolerances unless otherwise specified | | CUSTOMER | | FCI | |
|----------------------|----------------|----|------|---------------------------------------|------------------------|------------|-------------------------------|-----|---------------------------|
| lfr | ecm no. | dr | date | linear | 0. X ± 0.3 | projection | COPY | | www.fciconnect.com |
| M | | | | | 0. XX ± 0.13 | MM | title | | VERTICAL SIGNAL HDR 5 ROW |
| | | | | angles | . XXX ± .051 | scale | P.F. 30 POS. SELECT LOAD STD. | | |
| | | | | dr | 0° ± 2° | 2:1 | product family | | METRAL 4000 |
| | | | | engr | C. DAILY 2002-01-15 | | size | | 59566 |
| | | | | chr | J. VOLSTROF 2001-10-31 | | code | | 213 |
| | | | | appd | J. VOLSTROF 2002-01-15 | | sheet | | 2 |
| sheet index | revision sheet | | | | | | cage code | | 22526 |



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

REV E - 2004-04-18

Pro/E

PDM: Rev:M

STATUS: Released

Printed: Dec 17, 2009

PRODUCT NUMBER
SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-014 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS. SEE PRODUCT SPECIFICATION GS-12-184.
2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
3. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE
STRIPLINE SHIELD MATERIAL: PHOSPHOR BRONZE
4. PLATING INFORMATION: PLATING ON CONTACT AREA MEETS PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn ONLY. ALL OTHERS ARE TIN-LEAD.
5. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
FOR USE WITH METRAL 4000 RECEPTACLES.
DIM A : 5.00mm MIN, 6.50mm MAX FOR ROWS A,B,D,E
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS C
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROWS GND
FOR USE WITH METRAL 1000 RECEPTACLES/
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS A,B,C,D,E
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND
6. THE MIN PCB THICKNESS FOR FRONT PLUG-UP APPLICATIONS IS 1.6mm.
7. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
8. CURRENT RATING : 1 AMP PER PIN
9. TEMPERATURE RANGE : -55°C TO +105°C
10. P/N 59566-XXXXLF

LEAD FREE (OPTIONAL)
SELECT LOAD PATTERN
PLATING CODE

11. AVOID TRACES ON TOP OF BOARD DUE TO EXPOSED GROUND SHIELD.
12. FOR FRONT PLUG-UP APPLICATIONS, THE EVEN NUMBERED PINS IN ROW "C" CAN BE USED FOR POWER AS WELL AS GROUND. IF THE SURROUNDING PINS ARE NOT USED FOR POWER, THEN EACH PIN CAN CARRY 3 AMPS. IF THE SURROUNDING PINS ARE USED FOR POWER, THEN EACH PIN CAN CARRY 1 AMP. WHEN THE SURROUNDING PINS ARE USED ONLY FOR LOW SPEED SIGNALS, THEN THE EVEN NUMBERED "C" ROW PINS CAN ALSO BE USED FOR LOW SPEED SIGNALS.
13. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
14. THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
15. FOR LEAD FREE PART NUMBERS, ADD AN "LF" SUFFIX. EXAMPLE: 59566-X001LF
16. EQUIVALENT PRECIOUS METAL PLATINGS MAY BE SUBSTITUTED.

| | | | | | | | | | |
|----------------------|----------------|----|------|---------------------------------------|------------------------|------------|--|-------------------------------|--------|
| mat'l code SEE TABLE | | | | tolerances unless otherwise specified | | CUSTOMER | | FCJ www.fcjconnect.com | |
| ltr | ecm no. | dr | date | linear | 0.X ±0.3 | COPY | | title | |
| M | | | | | 0.XX ±0.13 | projection | | VERTICAL SIGNAL HDR 5 ROW | |
| | | | | angles | .XXX ±.051 | MM | | P.F. 30 POS. SELECT LOAD STD. | |
| | | | | dr | 0° ±2° | scale | | product family METRAL 4000 | |
| | | | | eng | C. DAILY 2002-01-15 | 1:1 | | code | |
| | | | | chr | J. VOLSTORF 2001-10-31 | A | | 213 | |
| | | | | appd | J. VOLSTORF 2002-01-15 | | | sheet | |
| | | | | | J. VOLSTORF 2002-01-15 | | | 3 | |
| sheet index | revision sheet | | | | | | | size | dwg no |
| | | | | | | | | 59566 | |
| | | | | | | | | | |

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCJ. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCJ. Copyright FCJ.



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

| SELECT LOAD PATTERNS | | | | | | | |
|--|-----|----------|----|----|----|----|----|
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X001 SEE NOTE 15 LEAD FREE OPTION | E | 02 | 02 | 02 | 02 | 02 | 02 |
| | D | 02 | 02 | 02 | 02 | 02 | 02 |
| | C | 04 | 02 | 04 | 02 | 04 | 03 |
| | B | 02 | 02 | 02 | 02 | 02 | 02 |
| | A | 02 | 02 | 02 | 02 | 02 | 02 |
| GND | 02 | 02 | 02 | 02 | 02 | 02 | |
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X002 SEE NOTE 15 LEAD FREE OPTION | E | 03 | 03 | 03 | 03 | 03 | 03 |
| | D | 02 | 03 | 03 | 03 | 03 | 02 |
| | C | 04 | 04 | 04 | 04 | 04 | 04 |
| | B | 03 | 03 | 03 | 03 | 03 | 03 |
| | A | 03 | 03 | 03 | 03 | 03 | 03 |
| GND | 02 | 02 | 02 | 02 | 02 | 02 | |
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X003 SEE NOTE 15 LEAD FREE OPTION | E | 04 | 02 | 02 | 02 | 02 | 02 |
| | D | 04 | 02 | 02 | 02 | 02 | 02 |
| | C | 04 | 02 | 02 | 02 | 02 | 02 |
| | B | 04 | 02 | 02 | 02 | 02 | 02 |
| | A | 04 | 02 | 02 | 02 | 02 | 02 |
| GND | - | - | - | - | - | - | |
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X004 SEE NOTE 15 LEAD FREE OPTION | E | 04 | 02 | 02 | 02 | 02 | 02 |
| | D | 04 | 02 | 02 | 02 | 02 | 02 |
| | C | 04 | 02 | 02 | 02 | 02 | 02 |
| | B | 04 | 02 | 02 | 02 | 02 | 02 |
| | A | 04 | 02 | 02 | 02 | 02 | 02 |
| GND | 02 | 02 | 02 | 02 | 02 | 02 | |
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X005 SEE NOTE 15 LEAD FREE OPTION | E | 02 | 02 | 02 | 02 | 02 | 02 |
| | D | 02 | 02 | 02 | 02 | 02 | 02 |
| | C | 02 | 02 | 02 | 02 | 02 | 02 |
| | B | 02 | 02 | 02 | 02 | 02 | 02 |
| | A | 02 | 02 | 02 | 02 | 02 | 02 |
| GND | - | 02 | 02 | 02 | 02 | - | |
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X006 SEE NOTE 15 LEAD FREE OPTION | E | 03 | 02 | 02 | 02 | 02 | 02 |
| | D | 03 | 02 | 02 | 02 | 02 | 02 |
| | C | 03 | 02 | 02 | 02 | 02 | 02 |
| | B | 03 | 02 | 02 | 02 | 02 | 02 |
| | A | 03 | 02 | 02 | 02 | 02 | 02 |
| GND | - | 02 | 02 | 02 | 02 | - | |

| SELECT LOAD PATTERNS | | | | | | | |
|--|-----|----------|----|----|----|----|----|
| METRAL P/N | ROW | PIN CODE | | | | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 |
| 59566-X007 SEE NOTE 15 LEAD FREE OPTION | E | 02 | 02 | 02 | 02 | 02 | 02 |
| | D | 02 | 02 | 02 | 02 | 02 | 02 |
| | C | 04 | 02 | 02 | 02 | 02 | 02 |
| | B | 02 | 02 | 02 | 02 | 02 | 02 |
| | A | 02 | 02 | 02 | 02 | 02 | 02 |
| GND | - | 02 | 02 | 02 | 02 | - | |

| PIN CODES | DIM A |
|-----------|-------|
| 01 | 5.00 |
| 02 | 5.75 |
| 03 | 6.50 |
| 04 | 7.25 |
| *19 | 8.00 |

* CURRENTLY NOT AVAILABLE

| | | | | | | | | | |
|----------------------|----------------|----|------|---------------------------------------|------------------------|------------|--|---------------------------------|--|
| mat'l code SEE TABLE | | | | tolerances unless otherwise specified | | CUSTOMER | | FCI | |
| litr | ecm no. | dr | date | linear | 0.X ± 0.3 | COPY | | www.fciconnect.com | |
| M | | | | angles | 0.XX ± 0.13 | projection | | title VERTICAL SIGNAL HDR 5 ROW | |
| | | | | | .XXX ± .051 | | | P.F. 30 POS. SELECT LOAD STD. | |
| | | | | dr | 0° ± 2° | | | product family METRAL 4000 | |
| | | | | engr | C. DAILY 2002-01-15 | | | code 213 | |
| | | | | ctr | J. VOLSTORF 2001-10-31 | | | sheet 4 | |
| | | | | appd | J. VOLSTORF 2002-01-15 | | | size 59566 | |
| sheet index | revision sheet | | | | | scale 1:1 | | dwg no 59566 | |
| | | | | | | | | code 22526 | |