


PART NUMBER		8609		73		5	
PIN OUT		rows a-b-c		3 - 48			
		rows a-c		4 - 32			
NUMBER OF CONTACTS							
TERMINATION							
L = 2.75 ±0.15 (.108)		A =		B = $\varnothing 0.8^{+0.3}$		13	
L = 4.15 ±0.15 (.163)		A = 0.6X0.6		B = $\varnothing 1 \pm 0.1$		23	
OPTIONS							
no option		-----		-----		7	
with harpoons		-----		-----		H	
PERFORMANCE CLASS							
DIN 41612 cClass 3		-----		-----		-----	
DIN 41612 cClass 2		-----		-----		-----	
DIN 41612 cClass 1		-----		-----		-----	
TERMINATION TYPE							
TIN LEAD		-----		-----		000E1	
LEAD FREE		-----		-----		E1LF	

PCB DRILLING

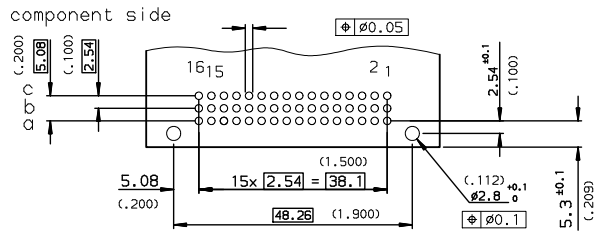

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1992/06/12	ANGULAR	0.x	±0.1
Eng	TARON	1992/06/12	LINEAR	0.xx	±0.1
Chr	LEGARE	1992/06/12	0.x*	0.xxx	±0.1
Appr	LEGARE	1992/06/12	Product family	DIN 8609	Spec ref -
FCJ		RIGHT ANGLE HEADER - STYLE C/2		Rev.	
title		SOLDER TO BOARD		C-8609-0255-2	
catalog no				CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
D	-	ROU	2002/08/28
E	LS05-001	JTA	2005/03/04
F	LS06-0097	LGO	2006/07/11
-	-	-	-
-	-	-	-
-	-	-	-