



(2,00mm) .0787"

TCMD SERIES



HIGH RELIABILITY IDC HEADER CABLE

Mates with:
SMM*, MMS*

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:

Black Glass Filled Polyester



Terminal:

Phosphor Bronze

Plating: Sn over 50µ" (1,27µm) Ni

Wire:








28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

Current Rating: 1A

Operating Temp Range: -40°C to +105°C

RoHS Compliant: Yes

Yes

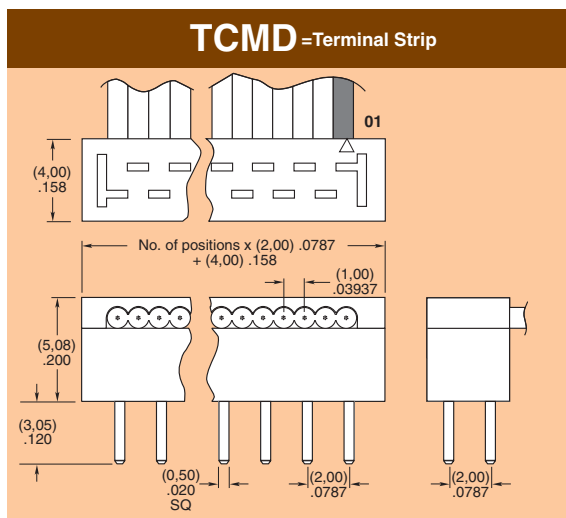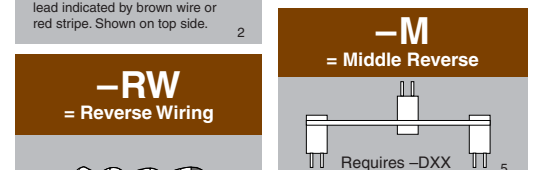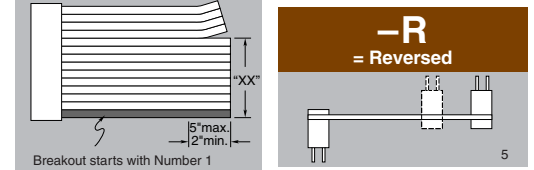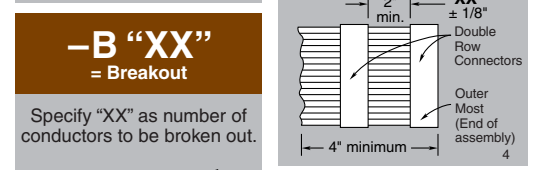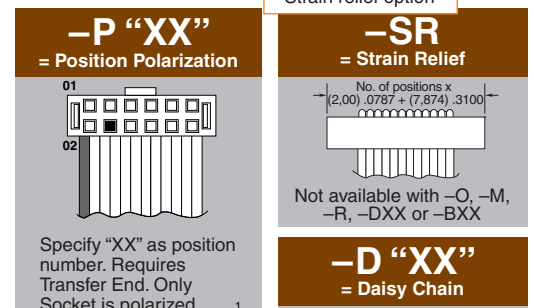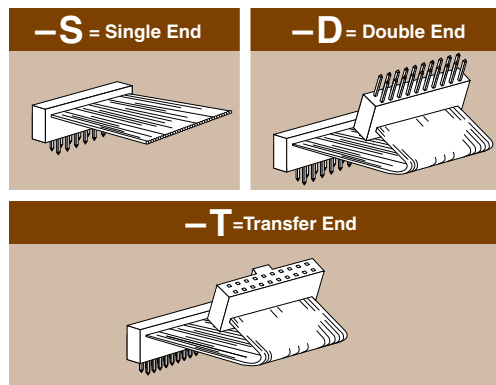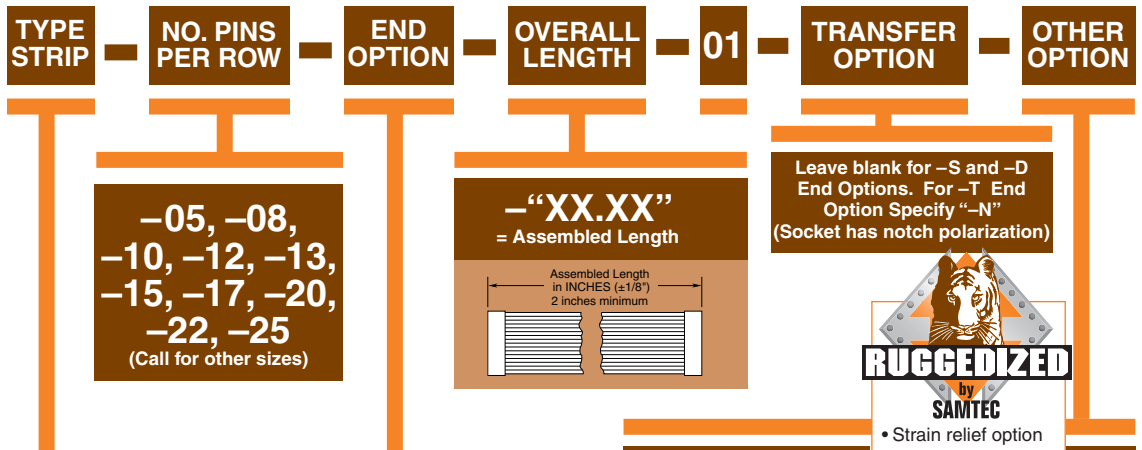

*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM