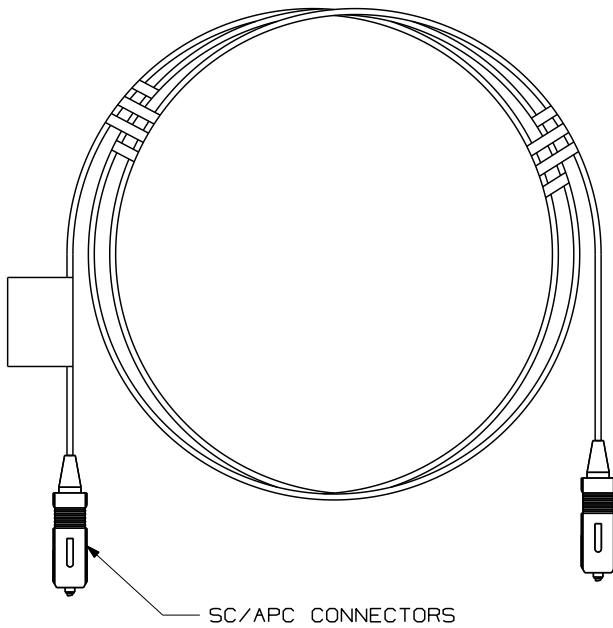




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

										SIMPLEX FIBER OPTIC PATCH CORD SC/APC TO SC/APC CONFIGURATION CUSTOMER DRAWING	
										 <b>PANDUIT</b> <sup>TM</sup> CORP. TINLEY PARK, ILL 60477	
										 THIRD ANGLE PROJECTION ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.0.8) ANGLES (.XXX) ±.010 (.0.3)	
										DRAWING FILENAME M02779CM_DC_00A.prt	
										SCALE NONE	
										PART NO. SEE TABLE, SHT. 2	
										DRAWING NO. 02779-42 (SHT. 1 of 2)	
										SIZE A	
R	06-14-07	MC		RELEASED TO PRODUCTION	02779-42					DATE 06-08-07	DRAWN BY MC REVIEW DRAWING NUMBERS CHECK'D
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH		

