



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

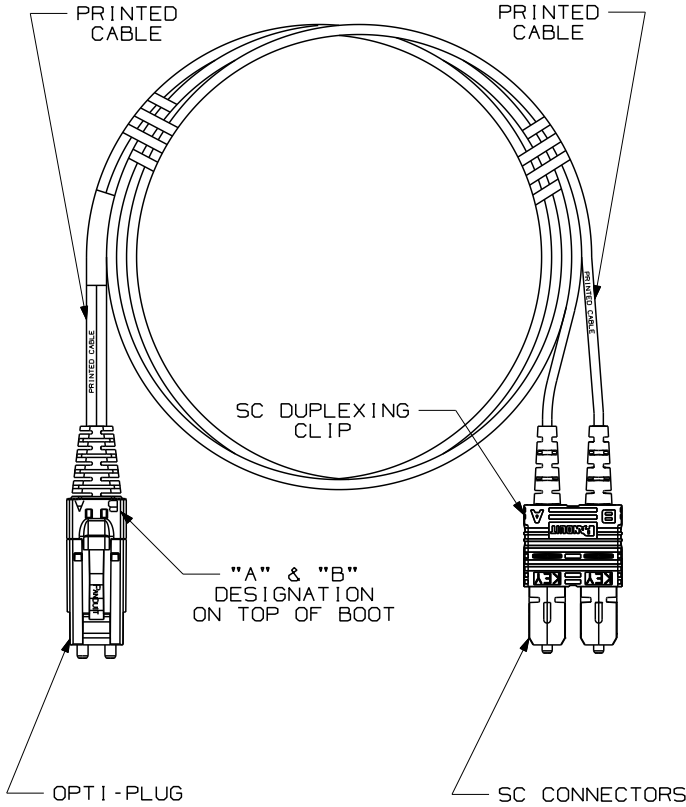

- NOTES:**
1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
  2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
  3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
  4. TESTED TO EIA/TIA 568-B.3.
  5. PATCH CORD ROUTING CONFIGURATION A TO B.
  6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

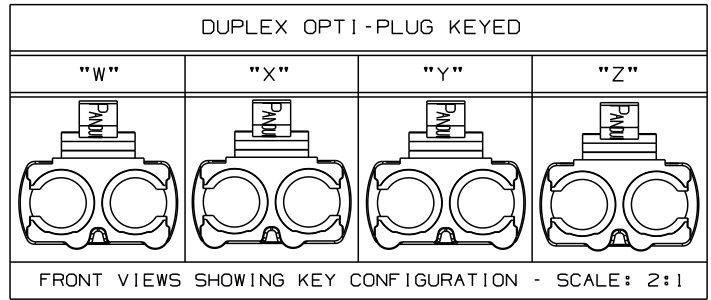

DUPLEX FIBER OPTIC PATCH CORD  
OPTI-PLUG KEYED TO SC CONNECTOR CONFIGURATION  
CUSTOMER DRAWING

R	06-06-07	MC		RELEASED TO PRODUCTION	02779-21															
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D										

	<b>PANDUIT</b> <sup>TM</sup> CORP. TINLEY PARK, ILL 60477	
	ALL DIMENSIONS ARE GIVEN IN INCHES. UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ANGLES (.XX)	DRAWING FILENAME M02779BP_DC_00A.prt SCALE NONE
	THIRD ANGLE PROJECTION	PART NO. SEE TABLE, SHT. 2 DRAWING NO. 02779-21 (SHT. 1 of 2)
	AS NOTED	SIZE <span style="font-size: 2em; font-weight: bold;">A</span>

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


DUPLEX ST TO SC FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				OPTI-PLUG KEYED			SC CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	COLOR	MAX. IL	MIN. RL	COLOR
FXD6PW-3M*Y "W"	RISER (OFNR)	10 GbE 50/125um OM3	DUPLEX 3.0mm Z1PCORD	AQUA	0.30dB	26dB	BLACK	0.30dB	26dB	ELECTRIC IVORY
F5D6PW-3M*Y "W"		50/125um OM2		ORANGE	0.30dB	20dB	BLACK	0.30dB	20dB	ELECTRIC IVORY
F6D6PW-3M*Y "W"		62.5/125um OM1		ORANGE	0.30dB	20dB	BLACK	0.30dB	20dB	ELECTRIC IVORY
FXD6PX-3M*Y "X"	RISER (OFNR)	10 GbE 50/125um OM3	DUPLEX 3.0mm Z1PCORD	AQUA	0.30dB	26dB	RED	0.30dB	26dB	ELECTRIC IVORY
F5D6PX-3M*Y "X"		50/125um OM2		ORANGE	0.30dB	20dB	RED	0.30dB	20dB	ELECTRIC IVORY
F6D6PX-3M*Y "X"		62.5/125um OM1		ORANGE	0.30dB	20dB	RED	0.30dB	20dB	ELECTRIC IVORY
FXD6PY-3M*Y "Y"	RISER (OFNR)	10 GbE 50/125um OM3	DUPLEX 3.0mm Z1PCORD	AQUA	0.30dB	26dB	ORANGE	0.30dB	26dB	ELECTRIC IVORY
F5D6PY-3M*Y "Y"		50/125um OM2		ORANGE	0.30dB	20dB	ORANGE	0.30dB	20dB	ELECTRIC IVORY
F6D6PY-3M*Y "Y"		62.5/125um OM1		ORANGE	0.30dB	20dB	ORANGE	0.30dB	20dB	ELECTRIC IVORY
FXD6PZ-3M*Y "Z"	RISER (OFNR)	10 GbE 50/125um OM3	DUPLEX 3.0mm Z1PCORD	AQUA	0.30dB	26dB	YELLOW	0.30dB	26dB	ELECTRIC IVORY
F5D6PZ-3M*Y "Z"		50/125um OM2		ORANGE	0.30dB	20dB	YELLOW	0.30dB	20dB	ELECTRIC IVORY
F6D6PZ-3M*Y "Z"		62.5/125um OM1		ORANGE	0.30dB	20dB	YELLOW	0.30dB	20dB	ELECTRIC IVORY

\* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	06-06-07	MC		RELEASED TO PRODUCTION	02779-21				

DUPLEX FIBER OPTIC PATCH CORD OPTI-PLUG KEYED TO SC CONNECTOR CONFIGURATION CUSTOMER DRAWING									
 <b>PANDUIT</b> ™ CORP. TINLEY PARK, ILL 60477					ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (0.8) ANGLES (.XXX) ±.010 (0.3)				
					DRAWING FILENAME M02779BP_DC_00A.prt SCALE NONE				
THIRD ANGLE PROJECTION DRAWN BY MC DATE 05-14-07 CHECK'D					REVIEW DRAWING NUMBERS AS NOTED PART NO. SEE TABLE DRAWING NO. 02779-21 (SHT. 2 of 2) SIZE A				