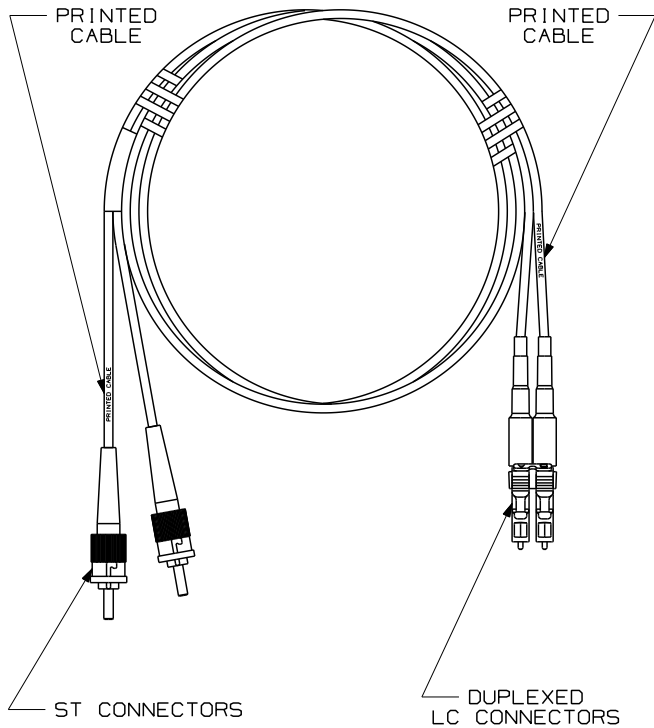




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

										FIBER OPTIC PATCH CORD DUPLEX ST TO LC CONFIGURATION CUSTOMER DRAWING					
										 TM PANDUIT CORP. TINLEY PARK, ILL 60477					
										 THIRD ANGLE PROJECTION		ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES		DRAWING FILENAME M02779BF_DC_00A.prt SCALE NONE	
										DRAWN BY MC		REVIEW DRAWING NUMBERS		PART NO. SEE TABLE, SHT. 2	
										DATE 04-27-07		DRAWING NO. 02779-14 (SHT. 1 of 2)		SIZE A	
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D					
R	06-05-07	MC		RELEASED TO PRODUCTION	02779-14										

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX ST TO LC FIBER OPTIC PATCH CORD


PANDUIT PART NO.	CABLE				ST CONNECTOR			LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. 1L	MIN. RL	COLOR	MAX. 1L	MIN. RL	COLOR
FXE2-10M*Y	RISER (OFNR)	10 GbE 50/125um OM3	DUPLEX 1.6mm Z1PCORD	AQUA	0.30dB	26dB	METALLIC FINISH	0.30dB	26dB	ELECTRIC IVORY
F5E2-10M*Y		50/125um OM2		ORANGE	0.30dB	20dB	METALLIC FINISH	0.30dB	20dB	ELECTRIC IVORY
F6E2-10M*Y		62.5/125um OM1		ORANGE	0.30dB	20dB	METALLIC FINISH	0.30dB	20dB	ELECTRIC IVORY
F9E2-10M*Y		9/125um OS1		YELLOW	0.75dB	55dB	METALLIC FINISH	0.35dB	55dB	BLUE
FXPE2-10M*	PLENUM (OFNP)	10 GbE 50/125um OM3	DUPLEX 1.6mm Z1PCORD	AQUA	0.30dB	26dB	METALLIC FINISH	0.30dB	26dB	ELECTRIC IVORY
F5PE2-10M*		50/125um OM2		ORANGE	0.30dB	20dB	METALLIC FINISH	0.30dB	20dB	ELECTRIC IVORY
F6PE2-10M*		62.5/125um OM1		ORANGE	0.30dB	20dB	METALLIC FINISH	0.30dB	20dB	ELECTRIC IVORY
F9PE2-10M*		9/125um OS1		YELLOW	0.75dB	55dB	METALLIC FINISH	0.35dB	55dB	BLUE
FXLE2-10M*	LOW SMOKE ZERO HALOGEN (LSZH) IEC	10 GbE 50/125um OM3	DUPLEX 1.6mm Z1PCORD	AQUA	0.30dB	26dB	METALLIC FINISH	0.30dB	26dB	ELECTRIC IVORY
F5LE2-10M*		50/125um OM2		ORANGE	0.30dB	20dB	METALLIC FINISH	0.30dB	20dB	ELECTRIC IVORY
F6LE2-10M*		62.5/125um OM1		ORANGE	0.30dB	20dB	METALLIC FINISH	0.30dB	20dB	ELECTRIC IVORY
F9LE2-10M*		9/125um OS1		YELLOW	0.75dB	55dB	METALLIC FINISH	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

FIBER OPTIC PATCH CORD
DUPLEX ST TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX) ±.010 (0.3)
(.XX) ±.03 (0.8) ANGLES

DRAWING FILENAME
M02779BF_DC_00A.prt

SCALE
NONE

DRAWN BY
MC

REVIEW DRAWING NUMBERS

PART NO.
SEE TABLE

DATE
04-27-07

DRAWING NO.
02779-14
(SHT. 2 of 2)

SIZE
A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	06-05-07	MC		RELEASED TO PRODUCTION	02779-14				