

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0795161061](#)  
**Status:** **Active**  
**Overview:** [microfit\\_30](#)  
**Description:** Micro-Fit Overmolded Cable Assembly, 6 Circuit, 1.0m (3.28' ) Length

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family Cable Assemblies  
 Series [79516](#)  
 Comments When using 30AWG current max per contact is 5A.  
 Connector to Connector Micro-Fit-to-Micro-Fit  
 Overview [microfit\\_30](#)  
 Product Name Micro-Fit 3.0™

**Physical**

Cable Length 1.0m (3.28' )  
 Circuits (Loaded) 6  
 Color - Resin Black  
 Gender Female-Female  
 Lock to Mating Part Yes  
 Material - Metal Phosphor Bronze  
 Material - Plating Mating Tin  
 Material - Plating Termination Tin  
 Material - Resin Polyester, PVC  
 Packaging Type Bag  
 Pitch - Mating Interface 3.00mm (.118")  
 Plating min - Mating 1.016µm (40µ")  
 Plating min - Termination 1.016µm (40µ")  
 Single Ended No  
 Wire Insulation Diameter N/A  
 Wire Size AWG 26  
 Wire/Cable Type Jacketed

**Electrical**

Current - Maximum per Contact 3A  
 Shielded No  
 Voltage - Maximum 250V

**Material Info**

**Reference - Drawing Numbers**

Sales Drawing SD-79516-003

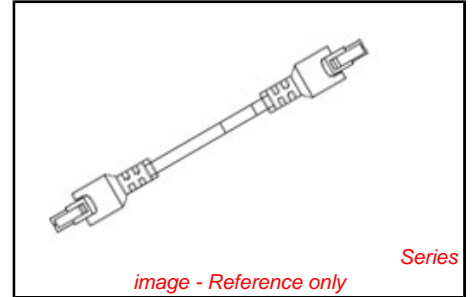


image - Reference only

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

Not Reviewed

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[79516Series](#)

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**