

# TX6™ 10Gig™ UTP Patch Cords

## specifications

Category 6A UTP patch cords shall be constructed of 24 AWG solid copper cable with an enhanced performance modular plug at each end. Patch cords shall be used in all work area outlets and patch panels. Patch cords shall be wired to be compatible with both T568A and T568B wiring schemes. The TX6™ 10Gig™ Patch Cords must be installed as part of a complete PANDUIT TX6™ 10Gig™ UTP Copper Cabling System in order to achieve 10GBASE-T certified performance.



## technical information

<b>Category 6A/ ISO 11801 Class E<sub>A</sub> channel performance tested to 650 MHz:</b>	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the draft requirements of ISO 11801 Class E <sub>A</sub> Edition 2.1, and IEEE 802.3an-2006, TIA/EIA568-B.2-10 ratified standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the PANDUIT® TX6™ 10Gig™ UTP Copper Cabling System
<b>FCC compliance:</b>	Meets FCC Part 68 Subpart F; contacts plates with 50 microinches of gold for superior performance
<b>IEC compliance:</b>	Meets IEC 60603-7
<b>UL rated:</b>	No. 1863

## key features and benefits

<b>100% performance tested</b>	Confidence that each patch cord delivers specified performance
<b>Centered de-embedded plug</b>	Performs in center of TIA/EIA-568-B.2-1 component range ensuring interoperability and excellent performance
<b>Integral pair manager</b>	Optimizes performance, consistency, and reliability by reducing untwist at plug
<b>Patented tangle-free latch</b>	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds and changes
<b>Slender strain relief boot</b>	Provides easy access in high-density applications
<b>Robust construction</b>	Plug contacts plated with 50 microinches of gold and rated to 2500 mating cycles
<b>Identification</b>	Provides identification of performance level, length, and quality control number for future traceability
<b>Variety of cable colors and lengths</b>	Meets individual length and color coding requirements for greater system flexibility
<b>Color bands (optional)</b>	Snap onto cable, allowing additional color coding options

## applications

TX6™ 10Gig™ UTP Patch Cords are a component of the PANDUIT TX6™ 10Gig™ UTP Copper Cabling System. This end-to-end system provides a cost effective media for ensuring that the most challenging network bandwidth needs are easily met today and tomorrow. Businesses are placing increased reliance on their networks to efficiently pass vital and time sensitive information throughout their enterprise.

The TX6™ 10Gig™ UTP Copper Cabling System will support the following applications:

- Data Center high bandwidth applications for switch-to-switch links, storage area networks, and aggregation of data
- 3-D modeling and work group file transfer
- Web-enabling applications such as Voice over Internet Protocol (VoIP)

### TX6™ 10Gig™ UTP Copper Cabling System

#### TX6™ 10Gig™ UTP Patch Cords

<b>3 feet:</b>	UTP6X3*Y
<b>5 feet:</b>	UTP6X5*Y
<b>7 feet:</b>	UTP6X7*Y
<b>10 feet:</b>	UTP6X10*Y
<b>14 feet:</b>	UTP6X14*Y
<b>20 feet:</b>	UTP6X20*Y

#### MINI-COM® TX6™ 10Gig™ UTP Jack Module

<b>Jack Module:</b>	CJ6X88TG**
---------------------	------------

#### TX6™ 10Gig™ UTP Copper Cable

<b>Plenum:</b>	PUP6X04***-U
<b>Riser:</b>	PUR6X04***-UY

#### DP6™ 10Gig™ Angled Punchdown Patch Panels

<b>24 port, 1 RU:</b>	DPA246X88TGY
<b>48 port, 2 RU:</b>	DPA486X88TGY

#### DP6™ 10Gig™ Flat Punchdown Patch Panels

<b>24 port, 1 RU:</b>	DP246X88TGY
<b>48 port, 2 RU:</b>	DP486X88TGY

#### Tools and Accessories

<b>Patch cord removal tool:</b>	PCRT1
<b>Flashlight kit:</b>	KPCRT-FL
<b>Patch cord band:</b>	PCBAND-Q


\*For lengths 3 to 20 feet (increments of 1 foot) 25, 30, 35 and 40 feet change the length designation in part number to the desired length. For standard cable colors other than IG (International Gray) add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange) or VL (Violet) before the Y at the end of the part number. For example, the part number for a blue 15-foot patch cord is UTP6X15BUY.

\*\*To designate color, add suffix IW (Int'l White), EI (Electric Ivory), WH (White), IG (Int'l Gray), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or VL (Violet), to end of part number.

\*\*\*To designate color, add suffix BU (Blue), WH (White), IG (International Gray), or YL (Yellow).

^To designate color, add suffix WH (White), EI (Electric Ivory), IG (Int'l Gray), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or VL (Violet) before -Q in part number.

# TX6™ 10Gig™ UTP Patch Cords

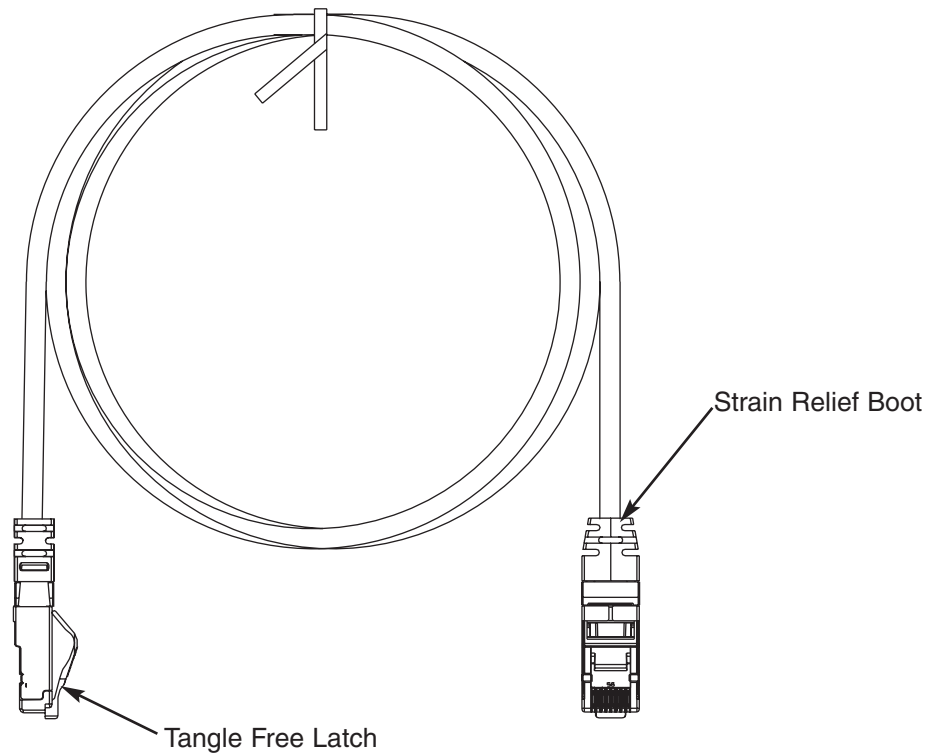

**T568B Wiring Scheme**

Plug Position	Cable Wire
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

**PANDUIT CANADA**  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

**PANDUIT EUROPE LTD.**  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

**PANDUIT SINGAPORE PTE. LTD.**  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

**PANDUIT JAPAN**  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

**PANDUIT LATIN AMERICA**  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.777.6000

**PANDUIT AUSTRALIA PTY. LTD.**  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of *PANDUIT* product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



**For more information**  
**Visit us at [www.panduit.com](http://www.panduit.com)**  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference **COSP41**

©2008 *PANDUIT* Corp.  
ALL RIGHTS RESERVED.  
**WW-COSP41**  
7/2008